







Training Program on Innovative Construction Technologies & Thermal Comfort in Affordable Housing



RACHNA for Officers

Venue: Online (Zoom)

Time: 10:00 AM to 5:30 PM

'RACHNA for Officers' training program delivered in-depth knowledge on thermal comfort, its nuances, and its relationship with building physics. Moreover, it discussed design strategies, construction techniques, policy documents, building codes, international practices, and other aspects relevant to thermal comfort in affordable housing through a suite of case studies. Additionally, it familiarized participants with the evaluation process of thermal comfort, the statistics, and indicators involved as well as affordable cooling technologies and their applicability in various climates. Session proceedings

Thermal Comfort Training Module		
10h00 - 10h10	Welcome address and Introduction to Climate Smart Buildings Programme and PMAY (U)	MoHUA and GIZ
10h10 - 10h15	Overview of workshop	Shivani S


10h15 – 11h00

Session 2 (Technical): Importance of Thermal
Comfort

Smita Chandiwala


This session established the importance of thermal comfort.

Importance of thermal comfort: Conditioning and Comfort



30 °C – Ambient temperature – 20 °C

Human Body Condition in two set of environment



Human Body Condition beyond comfort bands

It provided an insight into the connections between comfort, physiology, health, and productivity.

Importance of thermal comfort: Conditioning and Comfort



- In ability to shed excess heat leads to rise in core body temperature.
- Increase heart rate
- Loss of concentration
- Irritation
- Sickness and Vomiting
- Unconsciousness
- Death





It briefly exposed the audience to the connection between buildings and comfort.

ECO NIWAS Samhita: ECBC Residential



To limit the heat gain/loss from the building envelope, the code specifies:

Maximum value of thermal transmittance of roof (U_{roof}= 1.2 W/m².K) for all climate zones

Maximum value of Residential Envelope Transmittance Value (RETV) for building envelope (except roof)

It provided overarching guidance about the ways and means to achieve comfort in buildings.

Importance of thermal comfort: Ways to achieve it



- Electrical Mechanical Systems
- Change of Air
- Air Velocity
- Cooling
- Heating

With the help of examples, the factors affecting thermal comfort were explained.





Factors Affecting Thermal Comfort: Others



physiological adjustments

Age



Long term physiological adjustments

- Acclimatization
- Short-term physiological adjustments
- Long-term endocrine adjustments
- Body shape and fat








Age and gender

· Status of health

The session ended with establishing a relation between comfort and associated energy consumption through cooling needs.

Impact of need of Thermal Comfort: India Cooling Action Plan



India's cooling demand

- 8 times by 2037-38
- 11 times for Building Sector compared to the baseline 2017-18
- India's Total Primary Energy Supply (TPES) for Cooling 4.5 times in 2037-38
- 30% reduction possible due to intervention - from better design and technology

Source: India Cooling Action Plan

11h00 – 11h10	Questions and Answers
11h10 – 11h20	Health Break





11h20 – 12h05			
	Session 3 (Technical): Affordable Housing Passive Design Strategies	Bhavya Pathak	





This session started with the introduction of passive design and its importance.

What is Passive Design?



- No universally accepted definition
- Use of building envelop components to ensure thermal comfort
 - Material Use
 - Spatial Configuration

It provided a quick overview of various strategies that are important to be incorporated in affordable housing.

Passive Design Parameters: Spatial Configuration & Construction Orientation Shading / Brise Solil Space Volumes Building Form – Form of Roof, Plan Conduction Material and construction





The session provided insights into the site level design decisions as well as building-level design decisions.

Other Passive Design Strategies: Spatial Configuration





Optimizing Radiation





Wind Direction and Speed

Rectangular Plan Less 'tight' buildings

Orientation: Positive, Negative and

Neutral

It further provided a comparative understanding of appropriate orientation & use of building mass to reduce radiative heat gains in warm climates

Passive Design: Residential Envelop Transmittance Value (RETV) Use of Material








RETV 18.0 W/m² Better Insulation on wall and roof (U value)



Higher Solar Reflectance On the roof (SRI)



RETV 15.0 W/m²

Better Windows (U Value, SHGC, VLT)






It will guide fenestration design, location, and shading design appropriate for affordable housing. The use of appropriate ventilation for comfort and well-being was also covered in this session.

Other Passive Design Strategies: Spatial Configuration









E-W Vertical,






- S Horizontal
- Latitude
- Climate Zone?

The session also provided selected case studies that have adopted best practice approaches at the site and at the building level to implement passive design strategies.

Blessings House: Auroville



- **Balancing Thermal Mass** and Insulation
- NV operation with controlled Ventilation
- Warm Humid Climate

Day shutting and nighttime comfort strategy show good results in preventing excessive temperature rise in the building

12h05 - 12h10

Ouestions and Answers






12h10 – 13h15		
	Session 4 (Technical): Building Materials and Methods of Construction for Affordable Housing	Bhavya Pathak






This session started with the overview of affordable walling, roofing and fenestration materials and technologies.

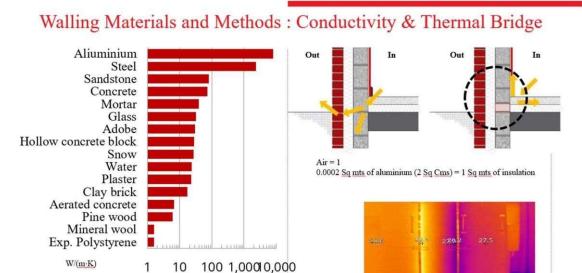

It further detailed the appropriateness of materials and methods of the construction for housing and its applicability in various housing typologies.

Information and Image Courtesy: Prof. Cloude Roulet, EMPA, Switzerland, Indo Swiss BEEP project, BEE, India

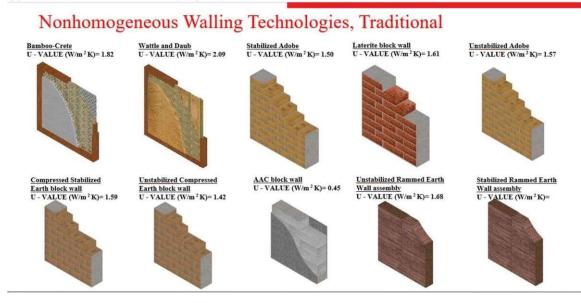






The session further enhanced the understanding of the audience to adopt materials and methods according to the climate context.

Roofing Coating Material and Solar Reflectance Index

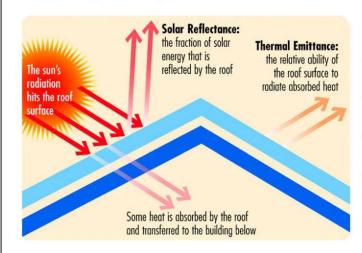

- Reflectance
- Thermal Emittance.
- Emissivity
- Solar Reflectance Index (SRI)

Reinforced

The focus was on alternative construction technologies, low embodied carbon materials, availability of material locally and economics of it.

Nonhomogeneous Walling Technologies, Industrial Rat Trap Bond LGFSS- EPS PPGL GFRG Unfilled 230 MM Clay Brick Wall Base Line

GFRG Partially Filled

GFRG Fully






Stay-in-Place

The session also provided selected case studies of construction technologies that have been adopted in LHPs.

Light House Project: Agartala



- Light Gauge Steel Framed Structure with Infill Concrete Panels (LGSFS-ICP)
- Ground and 06 Floors
- Weight of the LGSFS-ICP building is about 20-30% lighter
- The LSG frames manufactured using numerically controlled roll
- forming machine using CAD design

Light House Project: Lucknow





- PVC Stay in Place Formwork System
- S and 13 Floors
- Rigid poly-vinyl chloride (PVC) based form work system serve as a permanent stay-inplace durable finished form-work for concrete walls
- The PVC extrusions consist of the substrate (inner) and Modifier (outer). The two layers are co- extruded during the manufacturing process to create a solid profile.

13h15 – 13h30	Questions and Answers
13h30 – 14h30	Lunch Break





14h30 – 15h15	Session 5 (Technical): Building Codes, Affordable Smita Chandiwala Housing and Thermal Comfort





This session provided an understanding of the provision of various thermal comfort-related clauses in the National Building Code, Eco Niwas Samhita, various guidelines provided by the government.

Standards, Guidelines, Codes, Laws, Rules.

Technical Specifications, Conditions and Performance defined

Voluntary in nature based on standards, best practices or empirical evidences

Set of guidelines referring to standards - aspirational

Successor of Codes, Under act of law, codes become law

Subset of Laws with penalty and enforcement mechanism defined


Standards

Guidelines

Codes

Laws

Overview of Code Provisions

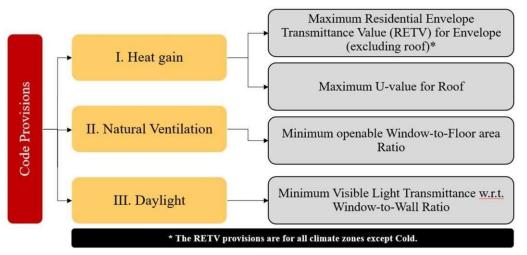


It also provided insights into the implementation of policy. The audience was able to comprehend the process of implementing the code at the local level. It discussed the programming of code implementation, the economics of it as well as the benefits of the codes.





Further, this session outlined the implementation of codes through examples.

RETV: Influencing Factors, Design and Construction




The net heat gain rate (over the cooling period)

through building envelope (excluding roof)

divided by the area of building envelope (excluding roof), measured in W/m².

Wall Construction details

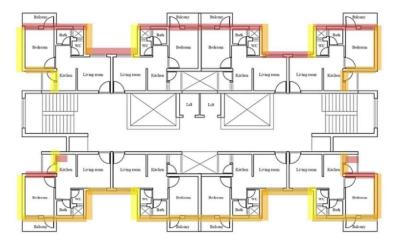



W S

N

Construction:

- Outer: 25mm Cement plaster Layer 1: 200mm AAC block Inner: 25mm Cement plaster

15h15 - 15h30	Questions and Answers
15h30 – 15h45	Health Break





15h45 – 16h45		Smita Chandiwala
	Session 6 (Technical): Application of Thermal Comfort in Affordable Housing- A Suite of Case Studies	






This session brought salient features of the projects that have demonstrated approaches to achieve thermal comfort in affordable housing. This session included the projects that were conceived using integrated design practices. The case studies in this session highlighted more than one aspect of the project that meets the objective of affordability and comfort. The on-site performance of the housing was also included to help the participants understand the methods of field performances.

Case study: Shree Ram Nagar Co-operative Housing society Case 3: Re - oriented + Case 2: Re - oriented **Existing layout** Calculations Increased FSI (With Cost) (Without cost) Without Shading Case 1A 2 With Shading Monolithic RCC Without Shading With Shading Burnt Brick Without Shading EPI With Shading Comfort Fly Ash Brick Without Shading With Shading Case 1D 2 AAC Block Without Shading With Shading Case 1E 2 Total Cases: 30 Case study: Existing Layout without Shading BURNT CLAY BRICK SOLID CONCRETE EXISTING RCC FLY ASH BRICK AAC BLOCKS (MASCON) BLOCK Case Case 1 Case 1B 1 Case 1C 1 Case 1D 1 Case 1E 1 Shading Without RETV 26.00 16.62 16.34 12.35 25.48 EPI 48.53 47.71 74.40 Comfort hours 4760 - 7627 4887-8599 4716-8608 1874-8760 4618-8009 Difference in cost ₹ -79,50,926 ₹ -66,03,988 ₹ -76,08,377 ₹ +61,12,630





Case study: Code and Cost

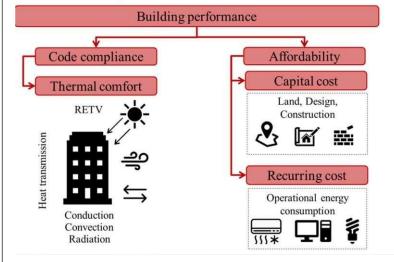

Challenge:

To optimize building performance, occupant comfort, while maximizing the potential of involved resources.

Maximizing the potential of resources



Incentive to contractor



Land usage is optimized.
Land value is achieved.



Profit increases.

(even on a break-even regime, the contractor will benefit)



More dwelling units, accommodating more people.

More comfortable homes.

16h45 - 17h00

Questions and Answers



