



Ministry of Housing
and Urban Affairs
Government of India



RACHNA 2.0

RESILIENT, AFFORDABLE AND COMFORTABLE HOUSING THROUGH NATIONAL ACTION

CLIMATE SMART BUILDINGS


Training #36 (RACHNA 2.0) : 1 Day Training Program for senior govt. officials at Jaipur



01


INTRODUCTION

Growing Opportunities with Rapid Urbanization

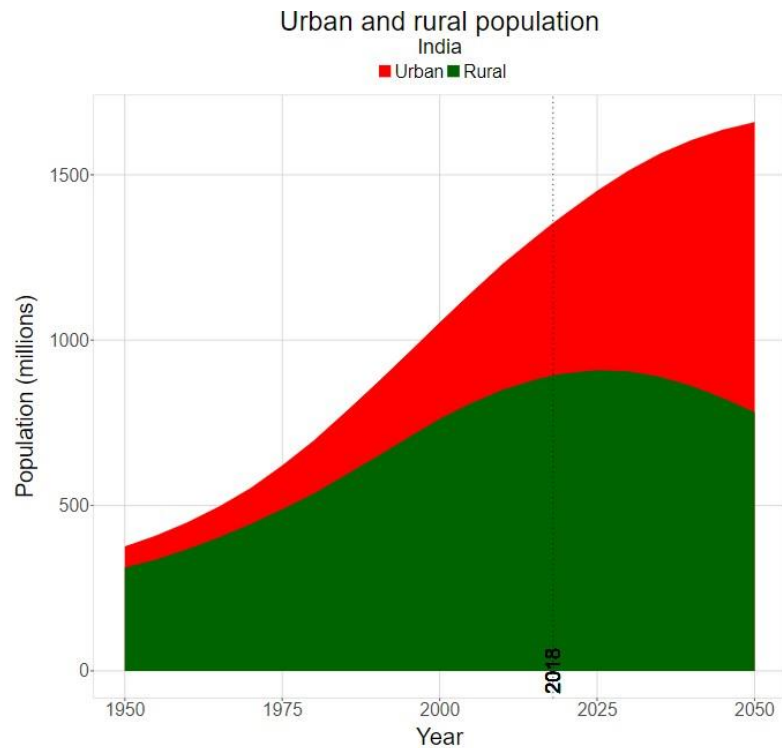

© 2018 United Nations, DESA, Population Division. Licensed under Creative Commons license CC BY 3.0 IGO.


Note: Urban and rural population in the current country.

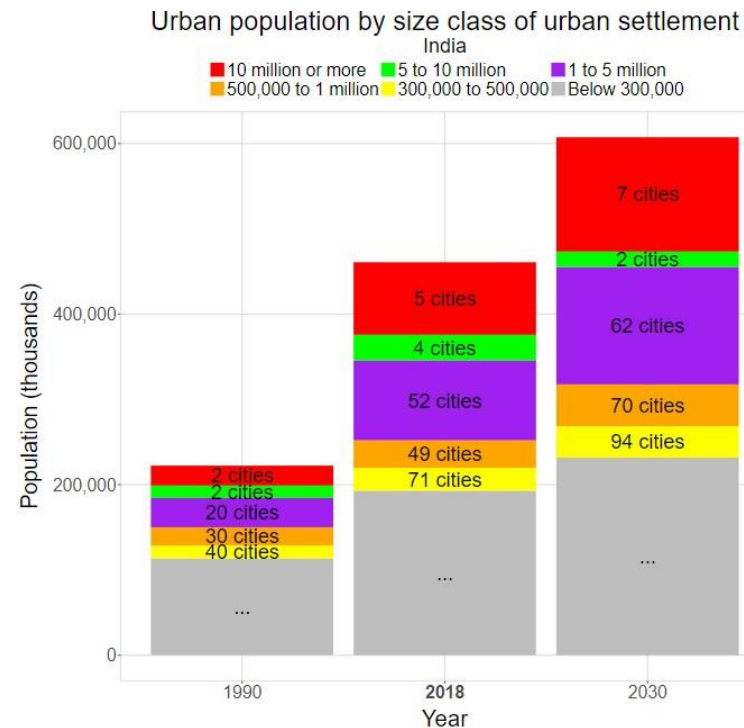

© 2018 United Nations, DESA, Population Division. Licensed under Creative Commons license CC BY 3.0 IGO.

Cities, which will
contribute over 80% to
GDP by 2050, need to be
Receptive, Innovative,
and Productive to foster
sustainable growth and
ensure a better quality of
living

Energy demand with Rapid Urbanization

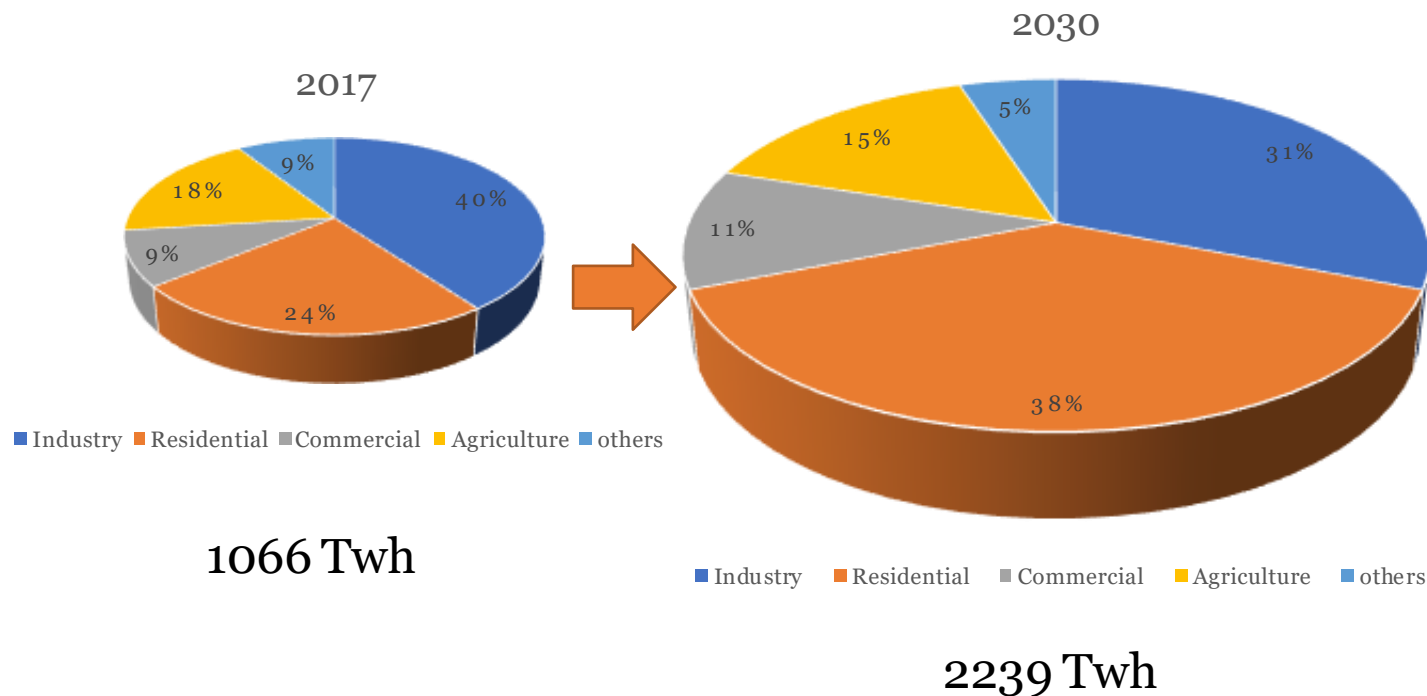


Residential Buildings: Fast Growth in Electricity Consumption.

*IESS, NITI Aayog

- Residential buildings consumes around 255 TWh electricity in 2017, the electricity consumption in residential buildings is expected to multiply by **more than 3X** and reach around 850 TWh by 2030. Increased penetration of **air-conditioning / HVAC** in residential building is the key reason for this growth.
- Residential buildings will become the **largest end-user of electricity** in the country accounting for 38% of the total electricity consumption.

MoHUA Initiates for Urban Transformation

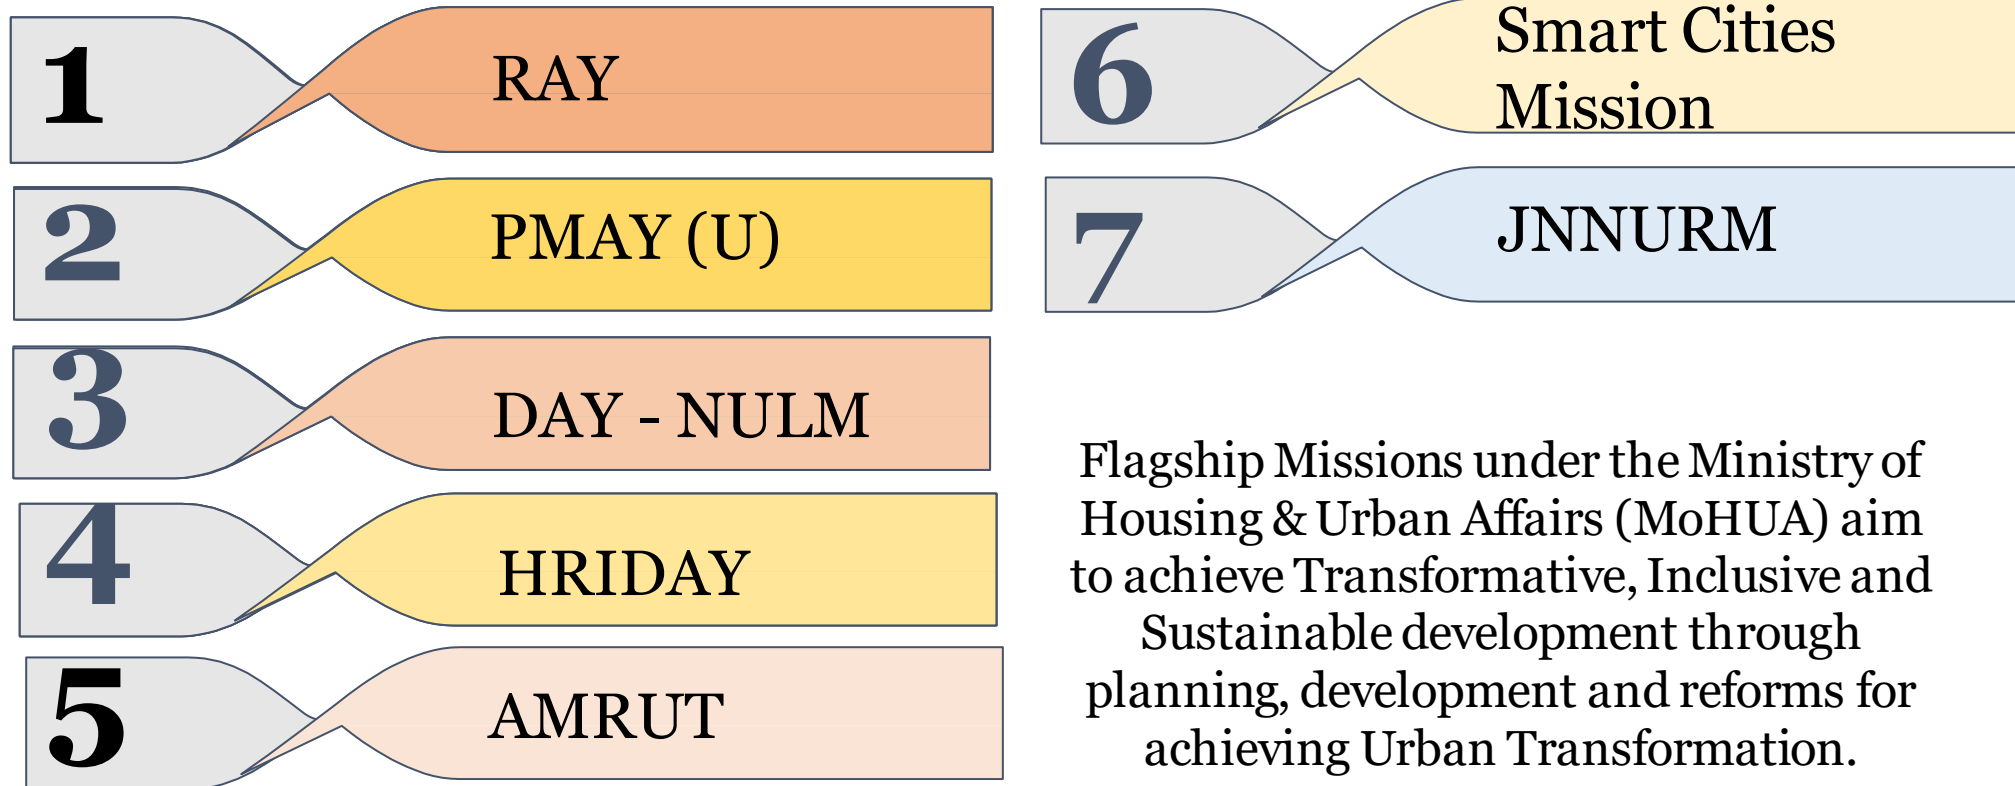

Affordable Housing in India


Affordable housing, as defined by the National Planning Policy Framework, is housing for sale or rent for those whose needs are not met by the market.



The provision of affordable housing is a key element of the Government's plan to end the housing crisis, tackle homelessness and provide aspiring homeowners with a step onto the housing ladder

Pradhan Mantri Awas Yojna – Urban

- PMAY-U, launched in 2015, aims to provide houses for homeless. The Government is offering this scheme to all UT's and states. It also offers interest subsidy for Home loans for first time buyers in urban areas
- The residential buildings expected to increase by 2 times in terms of floor area by 2030
- 12 million new affordable homes in Urban areas under PMAY by 2022.

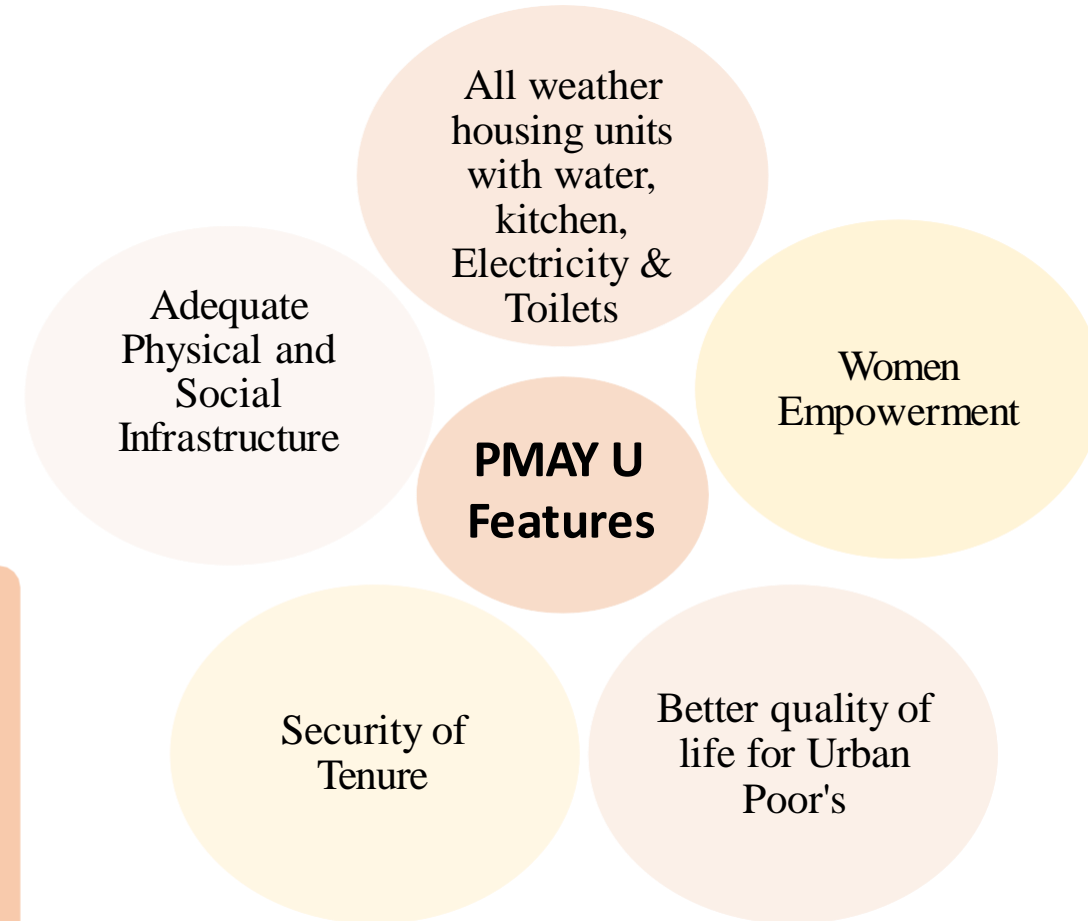

A significant percentage is in the form of high density, multi-storey residential blocks

Very low penetration of air conditioning though majority have ceiling fans

Ensuring Thermal comforts to occupants through design is of prime importance.

Pradhan Mantri Awas Yojna – Urban

The mission is addressing the affordable housing requirement in Urban areas through following program verticals:

Subsidiary for beneficiary led individual house construction/enhancement. In-Situ Slum Redevelopment (ISSR) for Slums

Affordable housing in partnership with Public & Private Sectors

Promotion of Affordable Housing through Credit linked subsidy

Slum rehabilitation of Slum dwellers with participation of private developers using Land as a resource

Project Objectives

Pradhan Mantri Awas Yojana - Urban

11.2 million dwelling
units are being
constructed



7.35 lakh crores
investment




10 lakh
occupants in the
EWS/LIG category
benefitting

**Construction of affordable housing in Partnership
with Public & Private Sectors**

**Promotion of affordable Housing through Credit
Linked Subsidy**

**Slum rehabilitation with private developers
using land as a resource**

**Subsidy for beneficiary-led individual house
construction/enhancement. (ISSR)**

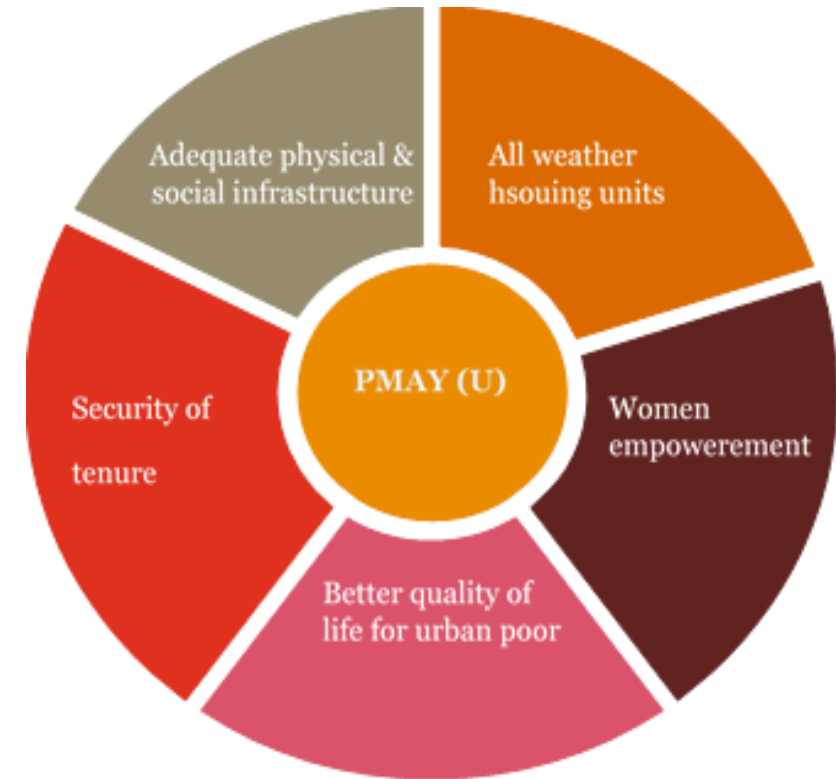

Key features of PMAY-U projects

Global Housing Technology Challenge- India (GHTC-India)

MoHUA has initiated the GHTC-India to identify and mainstream a basket of innovative construction technologies from across the globe for the housing construction sector that is sustainable, eco-friendly, and disaster-resilient.

GHTC-India



**54 Innovative
Construction
Technologies
Shortlisting**



**Light House
projects with 6
selected
technologies**

**AGARTALA,
TRIPURA**

Light Gauge Steel
Structural System &
Pre-Engineered Steel
Structural System

**CHENNAI, TAMIL
NADU**

Precast Concrete
Construction System-
Precast Components
Assembled at Site

**INDORE, MADHYA
PRADESH**

Prefabricated
Sandwich Panel
System

**LUCKNOW,
UTTAR PRADESH**

Stay-in-place
Formwork System

**RAJKOT,
GUJARAT**

Monolithic
Concrete
Construction
System

**RANCHI,
JHARKHAND**

Precast Concrete
Construction
System-3D Pre-
Cast Volumetric

Components of GHTC India



Events organized by MoHUA w.r.t. GHTC India Challenge

GHTC-India Launch: 14th Jan 2019



Indian Housing Technology Mela, Lucknow: 5th Oct 2021




Indian Urban Housing Conclave, Rajkot: 19th Oct 2022




Book Launches by MoHUA under GHTC India Challenge


Compendium of Light House Project Rajkot

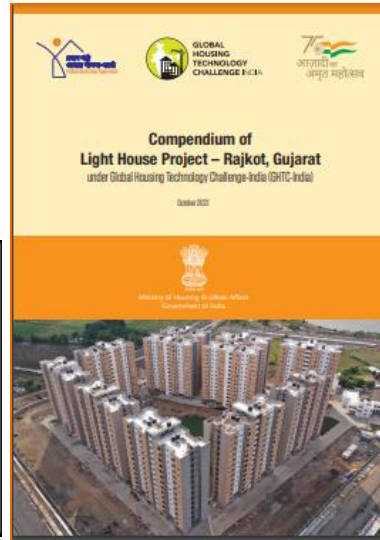


Compendium of Light House Project Chennai

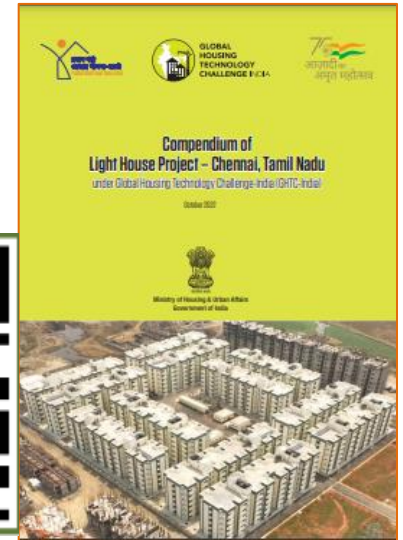


Handbook on Innovative Construction Technologies & Thermal Comfort

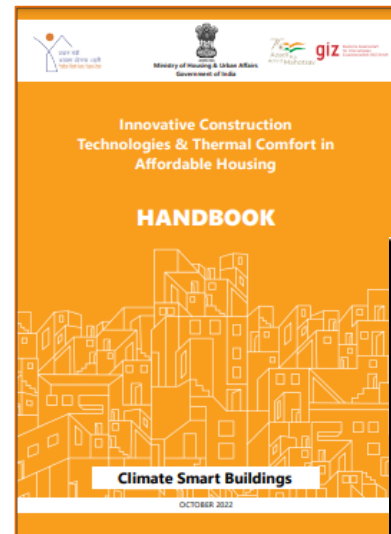

Compendium of 75 Trainings & Workshops under RACHNA

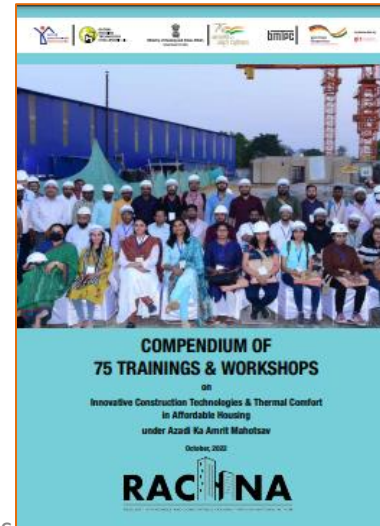

Climate Smart Buildings Programme (IGEN-CSB)

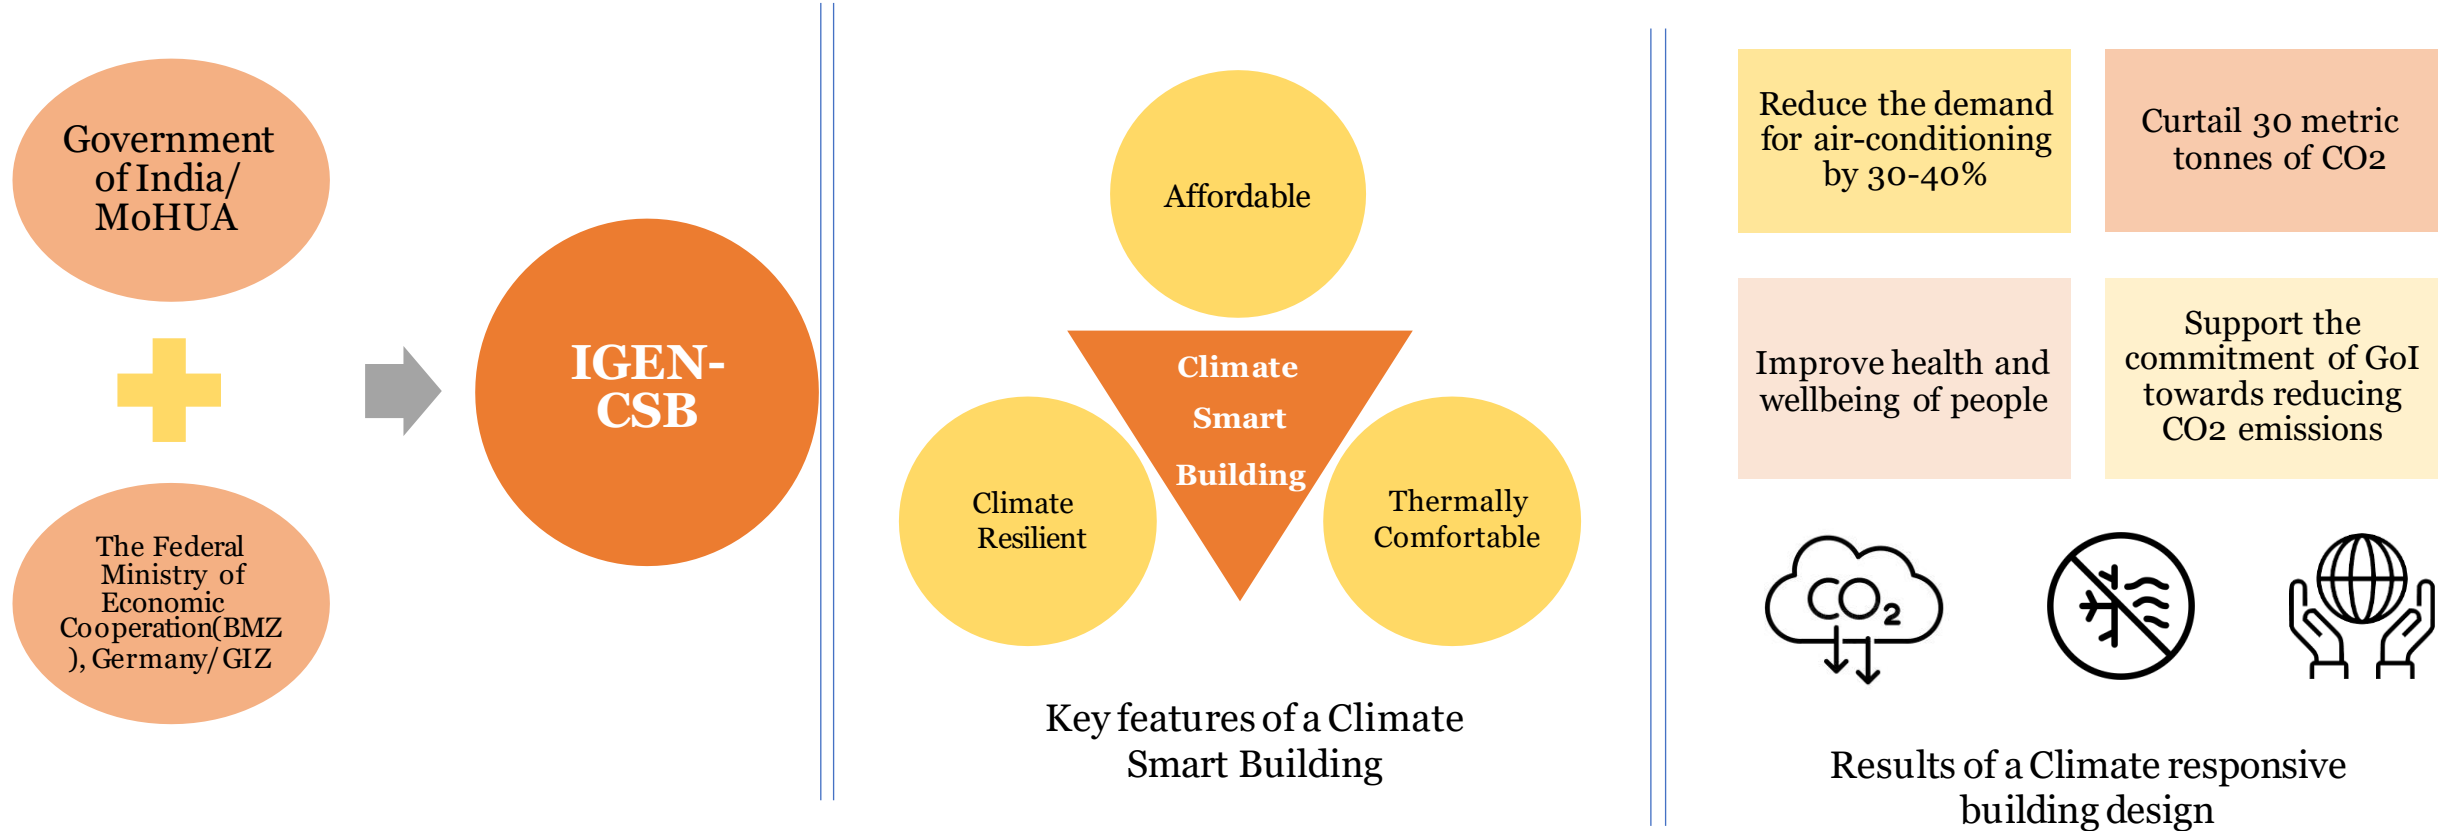

About the project-“Climate Smart Buildings (CSB): Establishment of the Cluster Cell in Rajkot, Gujarat under Global Housing Technology Challenge-India (GHTC-India)”

Chandigarh	Dadar & Nagar Haveli, Daman & Diu	Gujarat	Haryana	Punjab	Rajasthan

The climate smart building project intends to address the majority of gaps identified in the affordable housing sector

- By introducing of thermal comfort & climate resilience in the Local Government framework through Byelaws as an overarching objective.
- In order to achieve this objective, activities like documentation of LHP construction process from a sustainability perspective, knowledge transfer & capacity building through LHPs, performance monitoring & demonstration of thermal comfort in selected housing projects among others.

Project Objectives



WP1: Facilitate implementation and monitoring of Light House Projects (LHPs)



WP 2: Technical assistance to enhance thermal comfort in upcoming Demonstration Housing Projects (DHPs) and ARHCs (Affordable rental housing complexes) and other Public/Private housing projects in West Cluster



WP 3: Inclusion of climate resilience and thermal comfort requirements in building byelaws and Local Government framework in West Cluster



WP 4: Capacity development of Govt officials and private stakeholders on thermal comfort in the West Cluster



Tea Break

Session 1: Innovative Construction Technologies of Light House Projects, LHP Study and Observations



02

New Age Innovative Construction Technology & LHPs

Light House Projects

- The aim of the assignment is to introduce thermal comfort into the foray of affordable housing, a critical design & thus usability aspect which unfortunately has been missing from the current nature of affordable housing in India.
- Although studies & policies like the green guidelines for PMAY projects, Eco-Niwas Samhita Part-1, Star Labelling of energy efficient homes etc have been around but what the sector really needs is specific, easy to comprehend provisions which can be mandated & enforced in a steadfast way which is exactly what this project intends to do



Light House Projects

Strategic Intent

- Seamless implementation of LHPs
- Assist in knowledge transfer through documentation of technologies used & implementation of LHPs
- Technical assistance to achieve thermal comfort in demonstration projects
- Support the implementation of thermal comfort provision in state legislature
- Capacity buildings around thermal comfort & sustainable construction




Outcome

- Successful model for the implementation & documentation of LHPs
- Databank of technologies , relevant materials in the state analyzed around various relevant parameters
- Replicable models for thermally comfortable affordable houses in Gujarat (climate sensitive to 3 climatic conditions in the state)
- Thermal comfort provisions mandated by the law
- Better grasp of thermal comfort & sustainability in general among the concerned stakeholders & general public too

What are we working on?

LHPs are model housing projects with houses built with shortlisted alternate technology suitable to the geo-climatic and hazard conditions of the region, an initiative under the Climate Smart Building Programme.

These projects demonstrate and deliver ready to live houses with speed, economy and with better quality of construction in a sustainable manner.

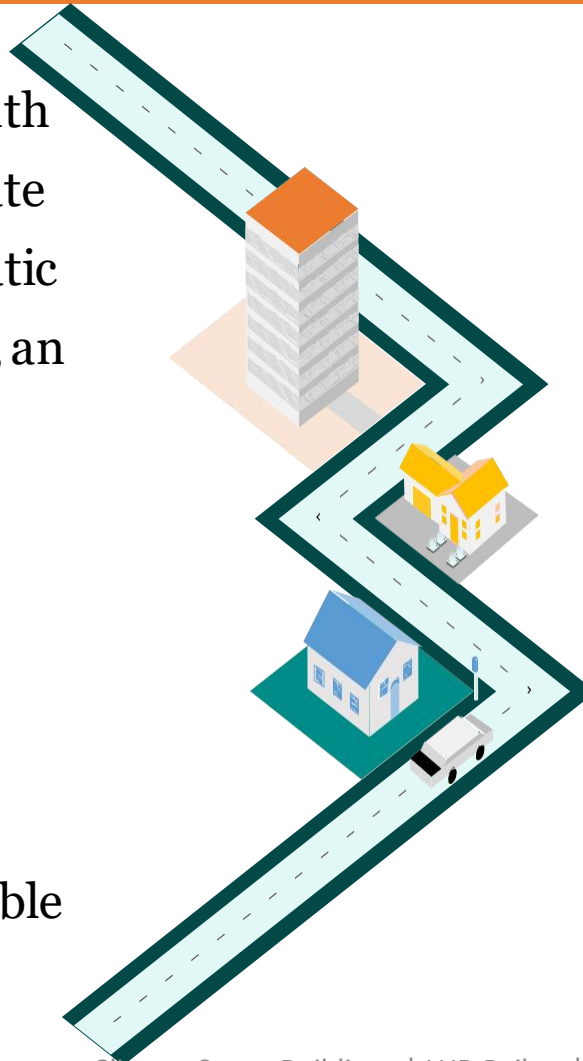

Currently the LHPs' are being implemented in six states (Uttar Pradesh, Gujarat, Madhya Pradesh, Gujarat, Jharkhand, and Tripura) of India under Global Housing Technology Challenge (GHTC) – India. These projects will be made up of modern technology and innovative processes and reduce the construction time and make a more resilient, affordable, and comfortable house for the poor.

Details of LHP Projects along with construction Technology Used

LHP Location	TECHNOLOGY SELECTED	NUMBER OF HOUSES TO BE CONSTRUCTED
Rajkot, Gujarat	Monolithic Concrete Construction using Tunnel Formwork	1144
Indore, Madhya Pradesh	Prefabricated Sandwich Panel System	1024
Chennai, Tamilnadu	Precast Concrete Construction System – Precast Components Assembled at Site	1152
Ranchi, Jharkhand	Precast Concrete Construction System – 3D Volumetric	1008
Agartala, Tripura	Light Gauge Steel Structural System & Pre-engineered Steel Structural System	1000
Lucknow, Uttar Pradesh	PVC Stay in Place Formwork System	1040

Features of LHP

Definition

A model housing project with approximate 1,000 houses built with shortlisted Construction technology under GHTC Challenge, demonstrating speed, economy and better quality of construction in a sustainable manner

Minimum Size of houses

A model housing project with approximate 1,000 houses built with shortlisted Construction technology under GHTC Challenge, demonstrating speed, economy and better quality of construction in a sustainable manner

Available on-site facilities

A model housing project with approximate 1,000 houses built with shortlisted Construction technology under GHTC Challenge, demonstrating speed, economy and better quality of construction in a sustainable manner

Design

- Designed as per the dimensional requirements mandated in the National Building Code (NBC) 2016.
- Design in concurrence with existing centrally sponsored schemes and Missions such as Smart Cities, AMRUT, Swachh Bharat (U), National Urban Livelihood Mission (NULM), Ujjwala, Ujala, Make in India, etc.
- Structural details designed considering durability and safety requirements of applicable loads including earthquakes and cyclone and flood as applicable confirming to applicable Indian/International standards.
- Design of Cluster involves the possibility of innovative system of water supply, drainage and rainwater harvesting, renewable energy sources with special focus on solar energy.

Construction Period

A model housing project with approximate 1,000 houses built with shortlisted Construction technology under GHTC Challenge, demonstrating speed, economy and better quality of construction in a sustainable manner

Construction Methodology of LHP Rajkot


Monolithic Concrete Construction using Tunnel Formwork

Tunnel formwork is a mechanised cellular structure construction system. It is made up of two half shells that are joined to make a room or a cell. An apartment is made up of several cells.


Tunnel forms allow walls and slabs to be cast in one day through several phases to the structure. The programme and the amount of floor area that can be poured in one day define the phasing. The task to be done each day is defined by the 24-Hour cycle. In the morning, the formwork is set up for the day's pour. In the afternoon, the reinforcement and services are installed, and concrete is poured. Concrete for walls and slabs must be poured in one operation once reinforcing has been installed. Early in the morning, the formwork is removed and positioned for the next phase.

The assembly-line approach of the system to construction provides developers and contractors with benefits relating to the certainty of their site schedule, efficient time management and an overall reduction in cost. This enables companies to develop a better quality, monolithic structure that is more acoustically and thermally efficient. The repetitive nature of tunnel form tasks ensures high productivity, and optimum use of labour and these are of considerable benefit to the project manager.

This formwork is manufactured in a completely automated facility in France and there is no manufacturing plant in India.

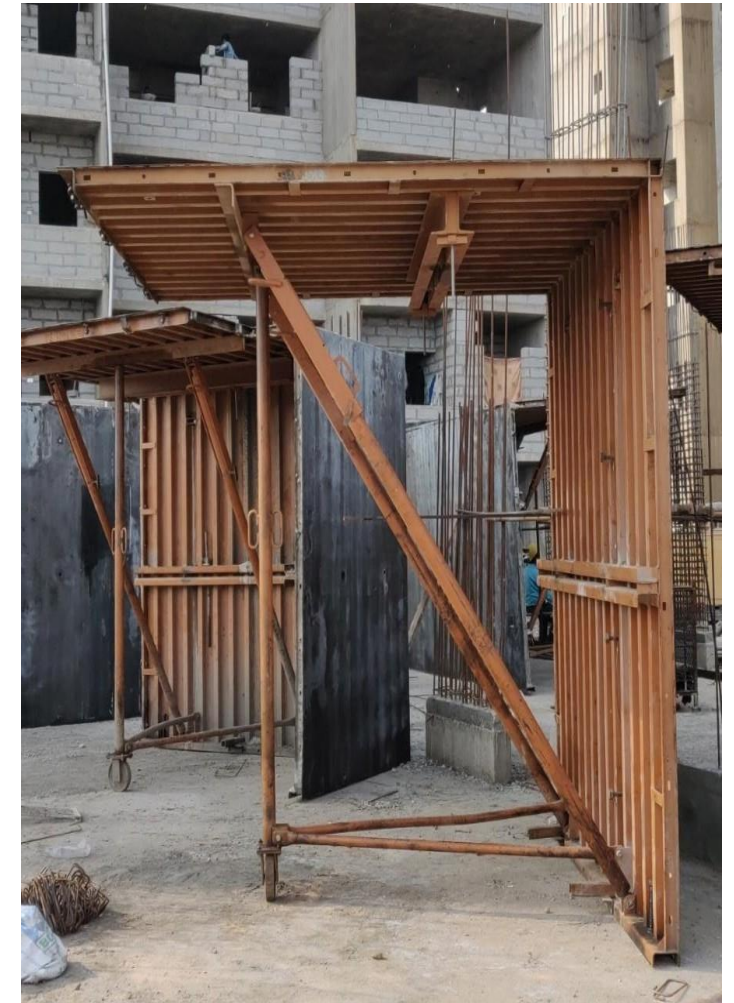


Construction Methodology – 24 Hour Cycle

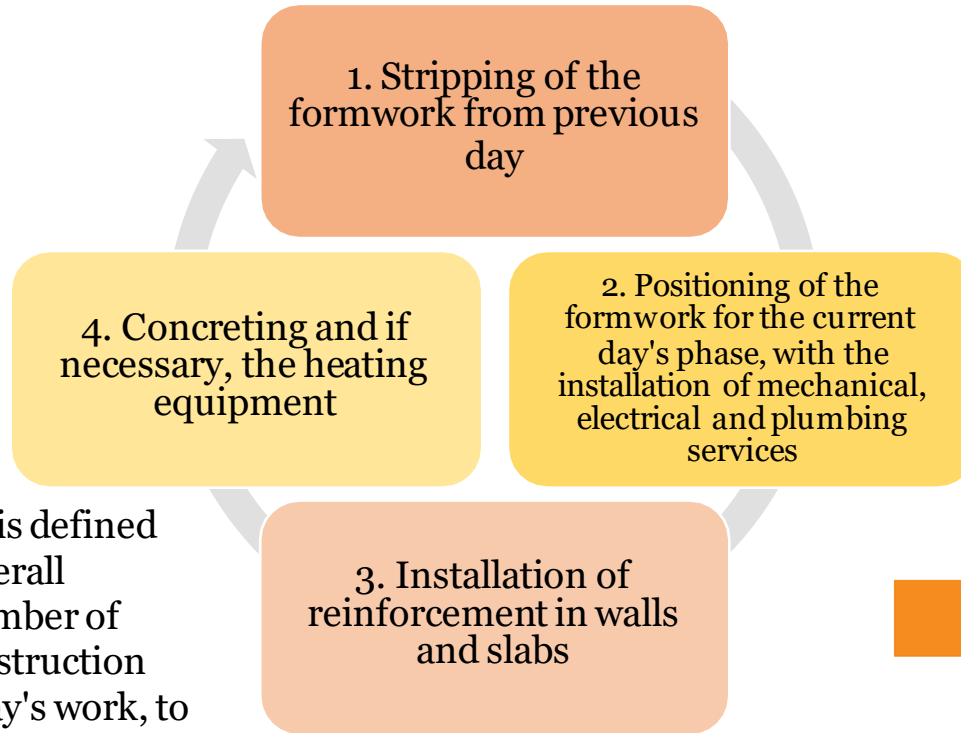

The task to be done each day is defined by the 24-Hour cycle. The overall structure is divided into a number of more or less comparable construction phases, each matching to a day's work, to establish this cycle. The amount of labour and equipment required is then calculated based on the magnitude of these phases. Every day, the phases are similar to achieve optimal efficiency.

The implementation of 24-Hour Cycle shall be in accordance with IS 456:2000 – Code of practice for plain and reinforced concrete. However, the structural engineer shall furnish details about the actual process of removal of formwork after casting of concrete

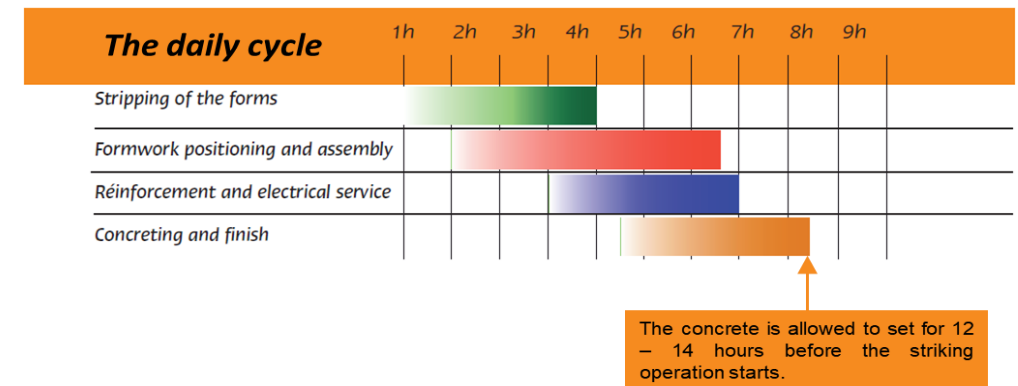

Light House Projects

Following are the details of Construction Technologies being employed at the Light House Projects shortlisted under the Global Housing Technology Challenge (GHTC) – India



Monolithic Concrete Construction using Tunnel Formwork

- LHP Location: Rajkot, Gujarat
- No. of Houses: 1144



Prefabricated Sandwich Panel System

- LHP Location: Indore, Madhya Pradesh
- No. of Houses: 1024



Precast Concrete Construction System – Precast Components Assembled at Site

- LHP Location: Chennai, Tamilnadu
- No. of Houses: 1152



Precast Concrete Construction System – 3D Volumetric

- LHP Location: Ranchi, Jharkhand
- No of Houses: 1008



Light Gauge Steel Structural System & Pre-engineered Steel Structural System Agartala, Tripura

- LHP Location: Agartala, Tripura
- No of Houses: 1000



PVC Stay in Place Formwork System

- LHP Location: Lucknow, Uttar Pradesh
- No of Houses: 1040

Monolithic Tunnel Formwork Technology – LHP Rajkot

In ‘TunnelForm’ technology, concrete walls and slabs are cast in one go at site giving monolithic structure using high-precision, re-usable, room-sized, Steel forms or molds called ‘TunnelForm’. An already established System for building construction in many countries, this system intends to replace the conventional RCC Beam-Column structure which uses steel/plywood shuttering. ‘TunnelForm’ system uses customized engineered steel formwork consisting of two half shells which are placed together and then concreting is done to form a room size module. Several such modules make an apartment.

Construction Process

Stripping of the
formwork from the
previous day.



Positioning of the
formwork for the
current day's
phase, with the
installation of
mechanical,
electrical and
plumbing services.



Installation of
reinforcement in
the walls and slabs.



Concreting

Monolithic Tunnel Formwork Technology – LHP Rajkot

Special Features

Facilitating rapid construction of multiple/ mass modular units (similar units).

Making structure durable with low maintenance requirement.

The precise finishing can be ensured with no plastering requirement.

The concrete can be designed to use industrial by-products such as Fly Ash, Ground granulated blast furnace slag (GGBS), Micro silica etc. resulting in improved workability & durability, while also conserving natural resource

Being Box type monolithic structure, it is safe against horizontal forces (earthquake, cyclone etc.)

The large number of modular units bring economy in construction.

Prefabricated Sandwich Panel System – LHP Indore

- An already established System for building construction in China, Australia, African and Gulf countries, this factory made Prefabricated Sandwich Panel System is made out of cement or calcium silicate boards and cement mortar with EPS granules balls, and act as wall panels. These replace conventional brick & mortar walling construction practices and can be used as load-bearing and non-load bearing walling for residential and commercial buildings. For buildings higher than single storey, the system can be used either with RCC or steel framed structure.
- Under this LHP, houses are being constructed using Prefabricated Sandwich Panel System with Pre-Engineered Steel Structural System.
- In this system the EPS Cement Panels are manufactured at the factory in controlled condition, which are then dispatched to the site. The panels having tongue and groove are joint together for construction of the building.

Special Features

Being dry walling system, brings speed in construction, water conservation (no use of water for curing of walling components at site).

The sandwich panels have light weight material as core material, which brings resource efficiency, better thermal insulation, acoustics & energy efficiency.

Being light in weight results in lower dead load of building & foundation size.

Precast Concrete Construction System – Precast Components Assembled at site – LHP Chennai

An already established technology for building construction, Precast concrete construction is a system where the individual precast components such as walls, slabs, stairs, column, beam etc, of building are manufactured in plant or casting yard in controlled conditions. The finished components are then transported to site, erected & installed.
The technology provides solution for low rise to high rise buildings, especially for residential and commercial buildings.

The construction process comprises of manufacturing of precast concrete Columns, Beams and Slabs in steel moulds.

The reinforcement cages are placed at the required position in the moulds.



Concrete is poured and compaction of concrete is done by shutter/ needle vibrator.



Casted components are then moved to stacking yard where curing is done for required time and then these components are ready for transportation and erection at site.



These precast components are installed at site by crane and assembled through in-situ jointing and/or grouting etc.

Precast Concrete Construction System – Precast Components Assembled at site – LHP Chennai

Special Features

Nearly all components of building work are manufactured in plant/casting yard & the jointing of components is done In-situ leading to reduction in construction time.

The controlled factory environment brings resource optimization, improved quality, precision & finish.

The concrete can be designed with industrial by-products such as Fly Ash, Ground granulated blast furnace slag (GGBFS), Micro silica etc. resulting in improved workability & durability, while also conserving natural resources.

Eliminates use of plaster.

Helps in keeping neat & clean construction site and dust free environment.

Optimum use of water through recycling.

Use of shuttering & scaffolding materials is minimal.

All weather construction & better site organization.

Precast Concrete Construction System – 3D Volumetric – LHP Ranchi

An already established System for building construction in Europe, Singapore, Japan & Australia, this 3D Volumetric concrete construction is the modern method of building by which solid precast concrete structural modules like room, toilet, kitchen, bathroom, stairs etc. & any combination of these are cast monolithically in Plant or Casting yard in a controlled condition. These Modules are transported, erected & installed using cranes and push-pull jacks and are integrated together in the form of complete building unit.

Subject to the hoisting capacity, building of any height can be constructed using the technology.

Construction Process

Sequential construction in the project here begins with keeping the designed foundation of the building ready, while manufacturing of precast concrete structural modules are taking place at the factory.

Factory finished building units/modules are then installed at the site with the help of tower cranes.



Gable end walls are positioned to terminate the sides of building. Pre stressed slabs are then installed as flooring elements.



Rebar mesh is finally placed for structural screed thereby connecting all the elements together.



Consecutive floors are built in similar manner to complete the structure.

Precast Concrete Construction System – 3D Volumetric – LHP Ranchi

Special Features

About 90% of the building work including finishing is complete in plant/casting yard leading to significant reduction in construction & occupancy time.

The controlled factory environment brings resource optimization, improved quality, precision & finish.

With smooth surface it eliminates use of plaster.

The monolithic casting of walls & floor of a building module reduces the chances of leakage.

The system has minimal material wastage (saving in material cost), helps in keeping neat & clean construction site and dust free environment.

Use of Optimum quantity of water through recycling.


Use of shuttering & scaffolding materials is minimal.

All weather construction & better site organization

Light Gauge Steel Structural System & Pre – engineered Steel Structural System – LHP Agartala

An already established System for building construction in Japan, Australia & North America; Light Gauge Steel Frame (LGSF) System uses factory made galvanized light gauge steel components. The components/sections are produced by cold forming method and assembled as panels at site forming structural steel framework up to G+3 building. LGSF is used in combination with pre-engineered steel structural system for buildings above G+3 for longevity, speedier construction, strength and resource efficiency.

Under this Light House Project, houses are being constructed using Light Gauge Steel Frame System (LGSF) with Pre-Engineered Steel Structural System.

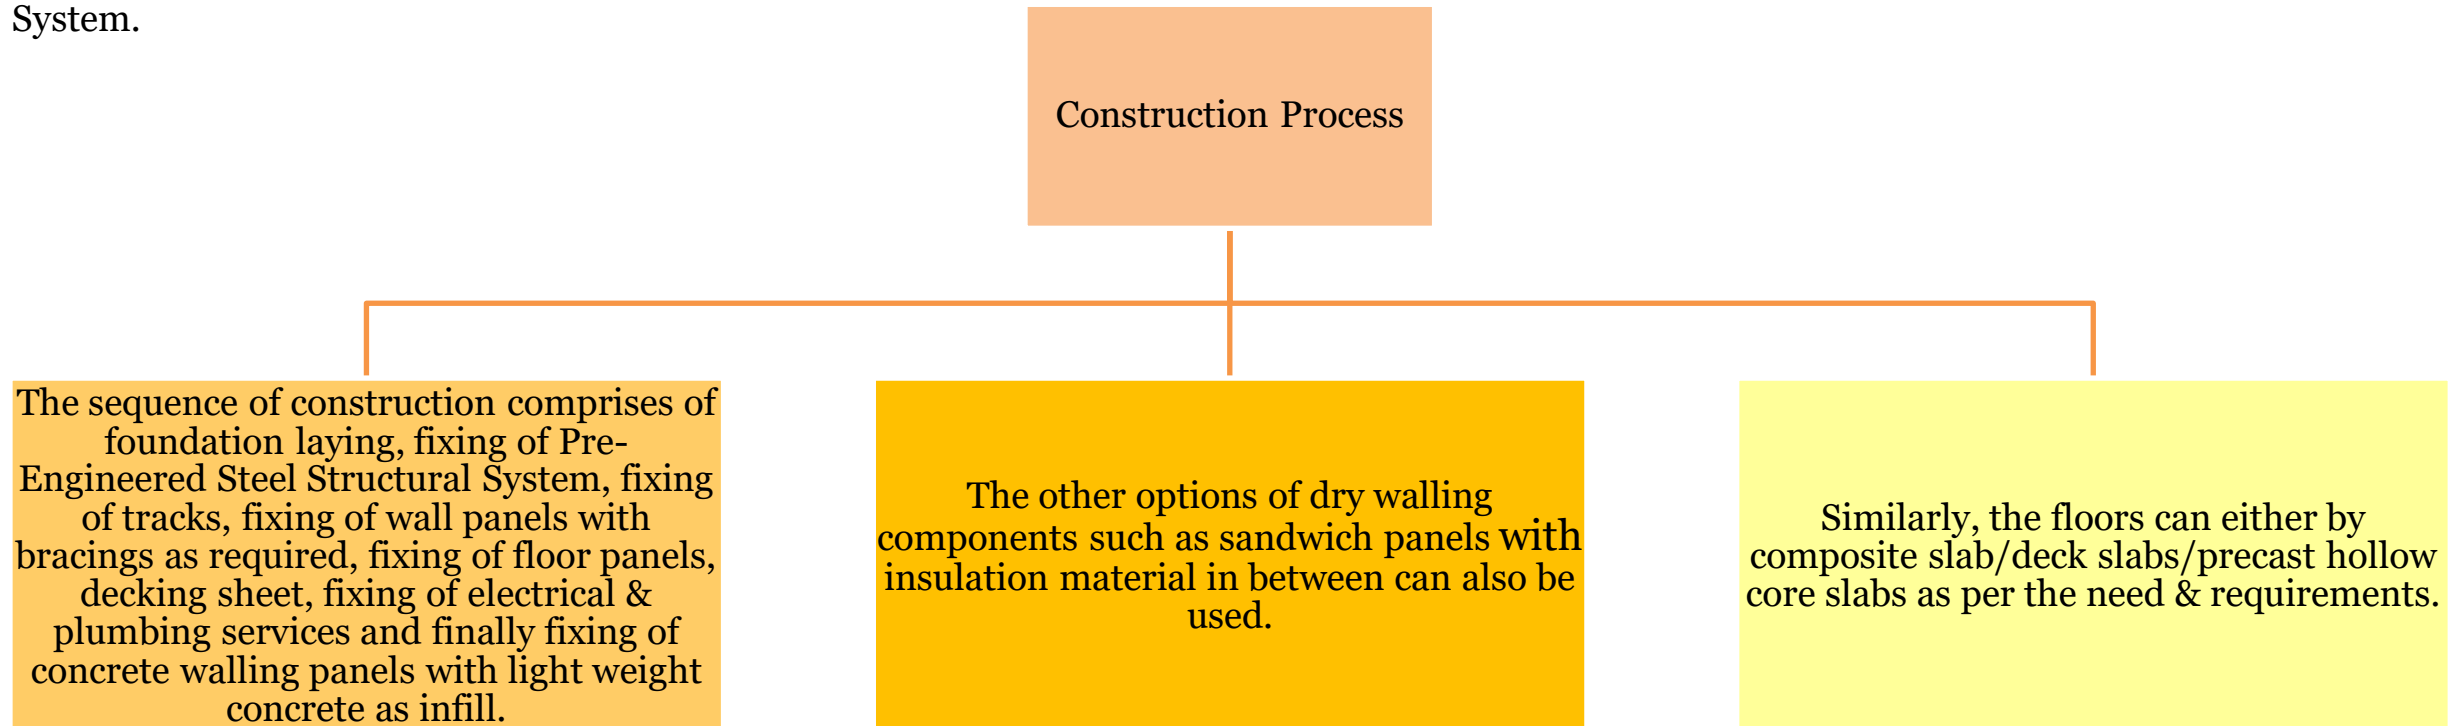

Light Gauge Steel Structural System & Pre – engineered Steel Structural System – LHP Agartala

Special Features

High strength to weight ratio. Due to light weight, significant reduction in design earthquake forces is achieved. Making it safer compared to other structures.

Fully integrated computerized system with Centrally Numerical Control (CNC) machine primarily employed for manufacturing of LGSF sections provide very high Precision & accuracy.

Construction being very fast, a typical four storied building can be constructed within one month.

Structure being light, does not require heavy foundation

Structural element can be transported to any place including hilly areas to remote places easily making it suitable for far flung regions including difficult terrains.

Structure can be shifted from one location to other without wastage of materials.

Steel used can be recycled multiple times

The system is very useful for post disaster rehabilitation work.

PVC Stay in Place Formwork System – LHP Lucknow

- Already in use in Canada & Australia, the plant manufactured rigid poly-vinyl chloride (PVC) based polymer components serve as a permanent stay-in-place finished form-work for concrete walls. The formwork System being used acts as pre-finished walls requiring no plaster and can be constructed instantly.
This System is suitable for residential and commercial buildings of any height from low rise to high rise. In order to achieve speedier construction, strength and resource efficiency, the composite structure with Pre-Engineered Steel Structural System as structural members is being used in the present project.

Construction Process

Construction is done in a sequential manner where at first, the Prefabricated PVC Wall panels and Pre-Engineered Steel Structural Sections as per the design are transported to the Site.

Then, these Sections are erected on the prepared foundation using cranes and required connections.



Floor is installed using decking sheet. Once the structural frame and floor is installed and aligned, wall panels are fixed on decking floor.



The pre-fabricated walling panels having provisions of holes for services conduits, are fixed along with the reinforcement & cavities inside the wall panels are filled with concrete.



Upon installment of wall panels, flooring and ceiling, the finishing work is executed.

PVC Stay in Place Formwork System – LHP Lucknow

Special Features

Having formwork already as part of system, the construction of building is faster as compared to conventional buildings. The formwork needs some support only for alignment purpose.

In case of concrete as filling material, the curing requirement of concrete is significantly reduced, thus saving in precious water resources.

The formwork system does not have plastering requirement & gives a very aesthetic look.




03

Thermal Comfort Analysis & Recommendations on LHPs and Demo Projects

CASE STUDY OF LHP RAJKOT

Thermal comfort study of the Light House Project- Rajkot

The LHP in Rajkot constructed with Monolithic Tunnel formwork technology has been planned and constructed with such specification and layout which would give better thermal comfort compared to conventional construction. GIZ was assigned the task of studying aspect of thermal comfort in LHP project.

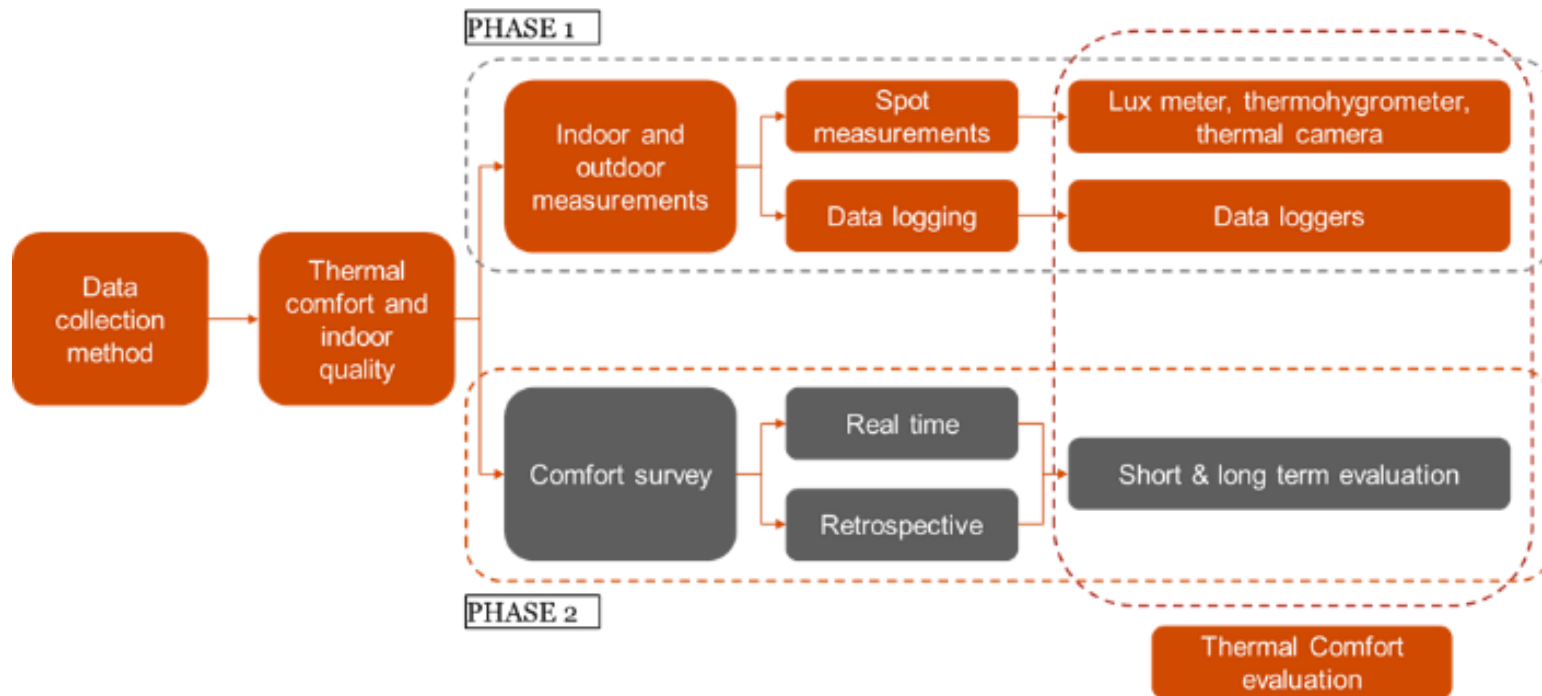


Methodology for monitoring and evaluation


- On-site spot measurements
 - dataloggers,
- comparative graphs, and
 - a comfort chart

Thermal comfort study of the Light House Project- Rajkot

On-site spot measurements

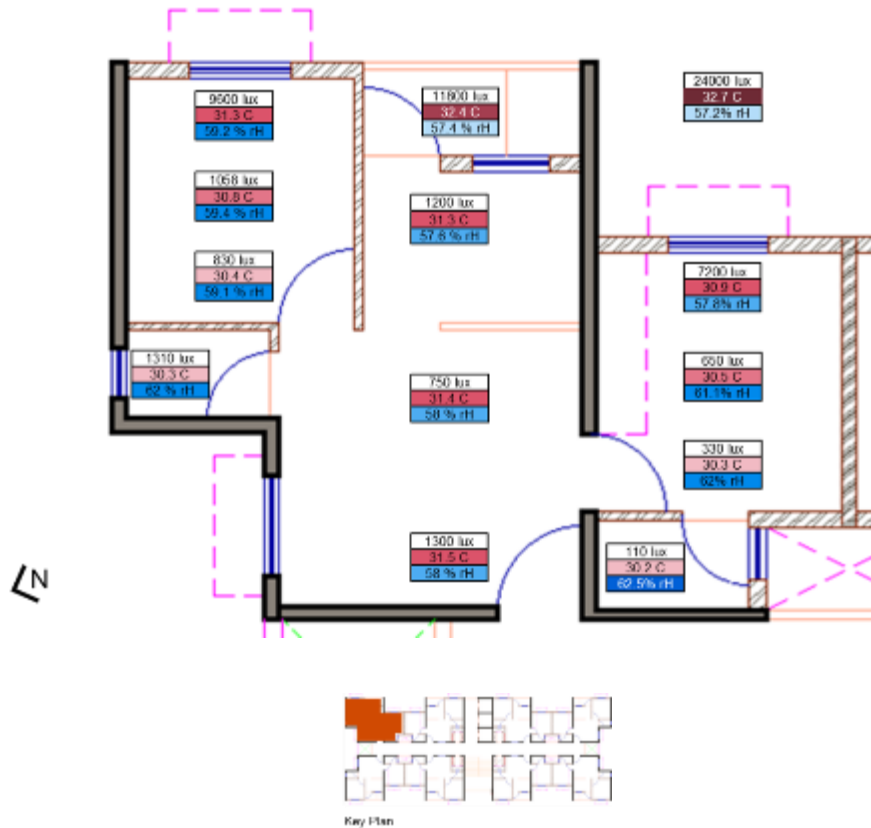


Findings

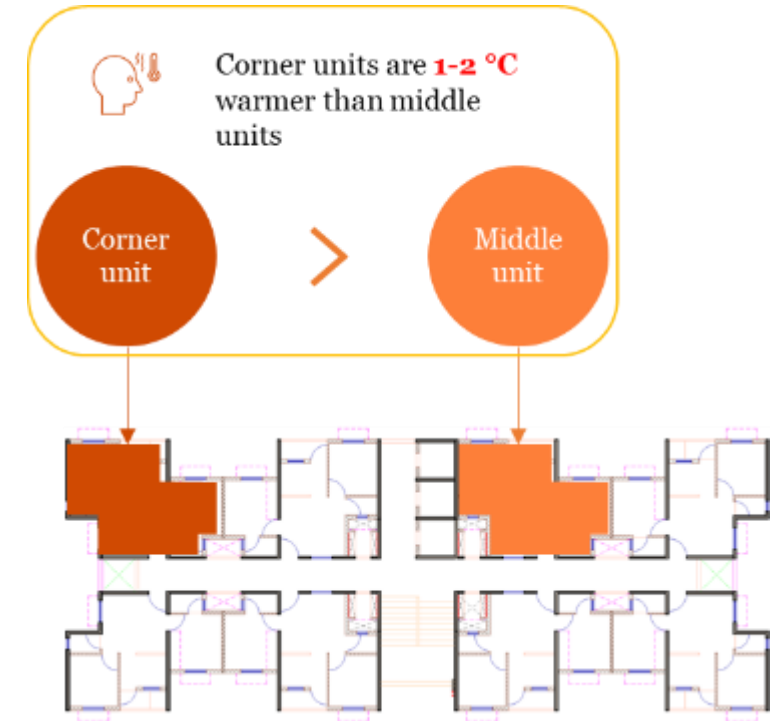


Thermal comfort study of the Light House Project- Rajkot

Findings (Cont.)

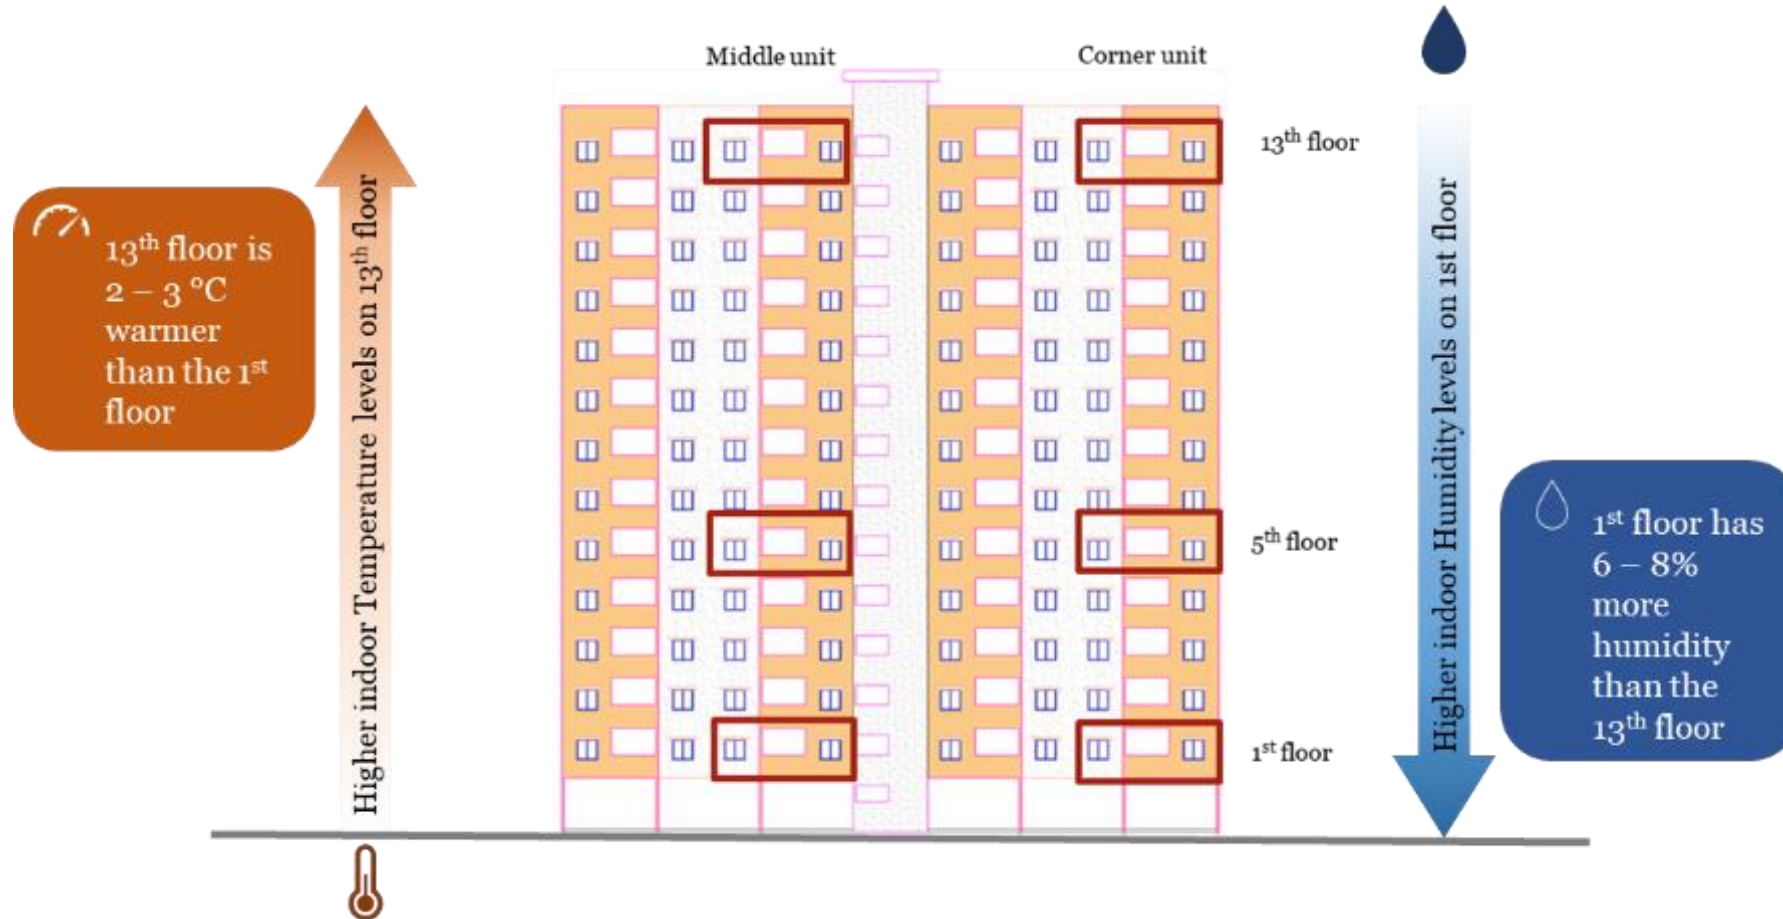

Thermal comfort study of the Light House Project- Rajkot

Datalogger placement

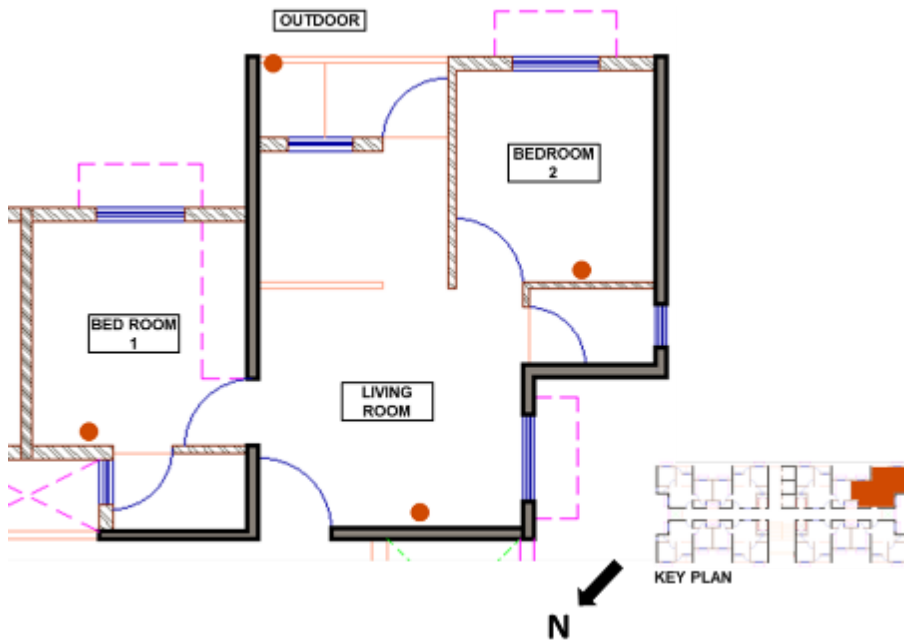


Location: Tower 8 | 1st floor | Corner unit

Occupancy: 9 am to 5 pm

Operation mode: No comfort system, No lighting, Natural Ventilation

Findings

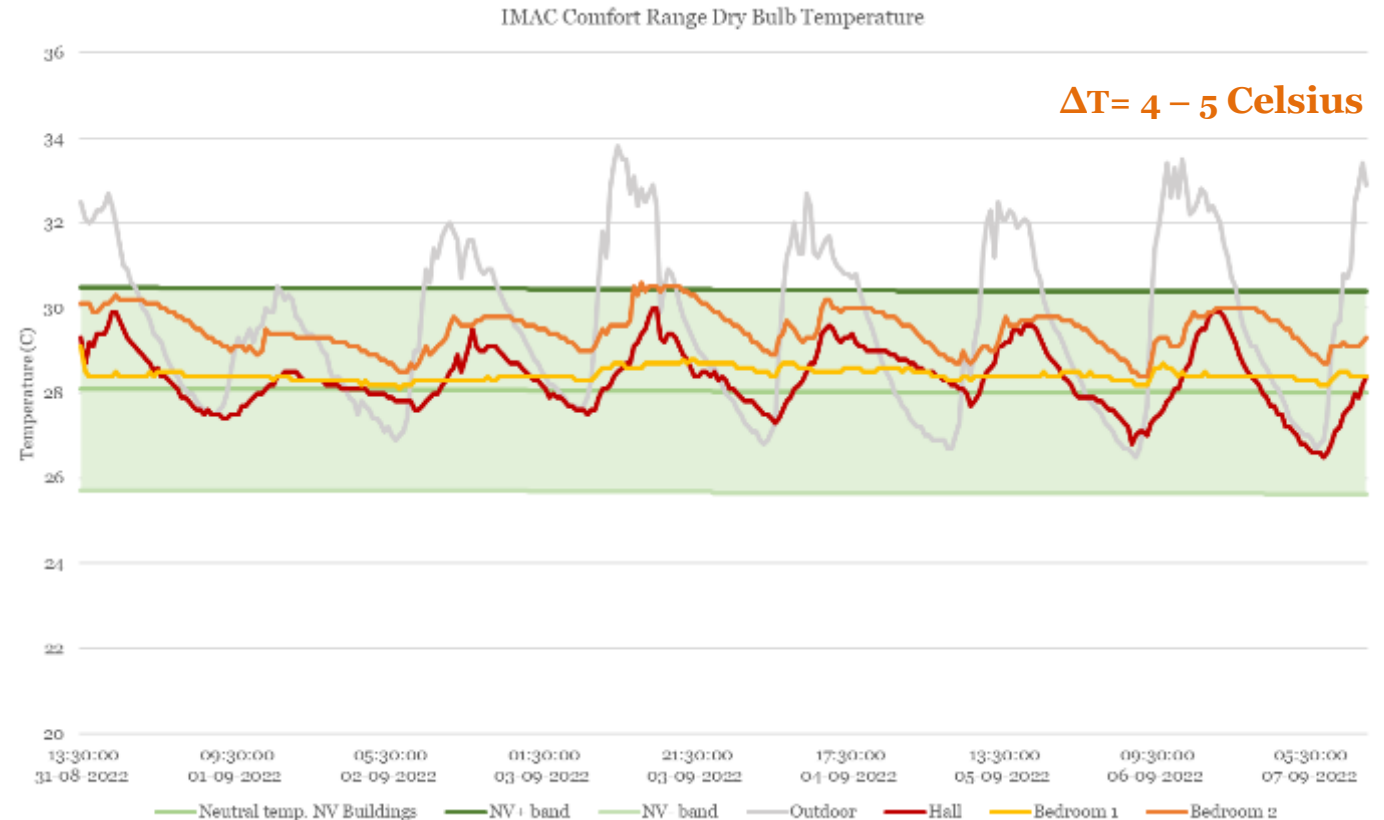

The data loggers readings from Wednesday, 31st August to 7th September 2022.


Thermal comfort study of the Light House Project- Rajkot

Findings (Cont.)



98%

of the time the indoor temperatures
stayed within the IMAC comfort band

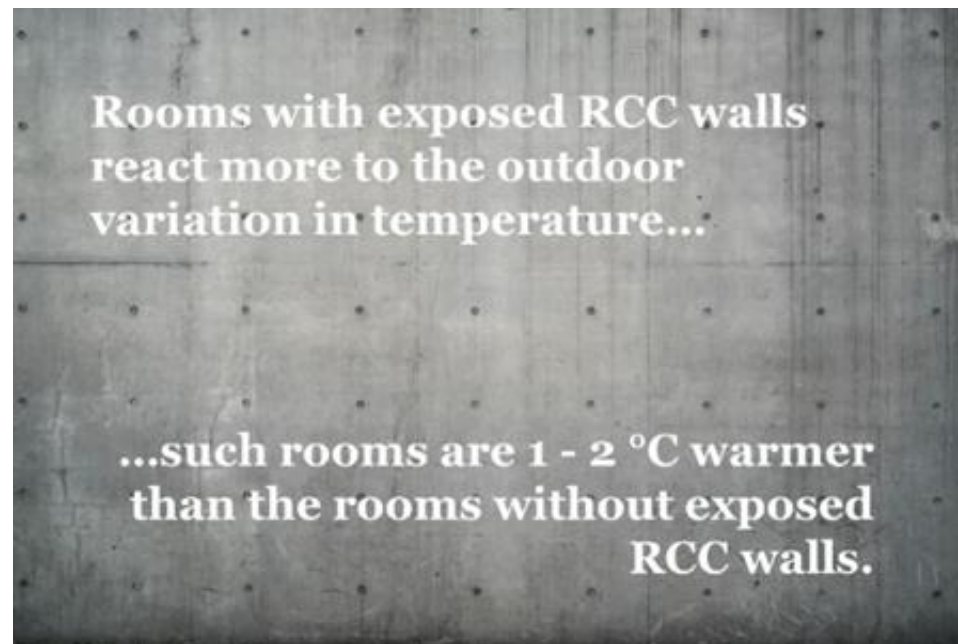




**RCC walls have no insulation properties, and they heat
and cool more rapidly based on outdoor conditions**

Key performance features of the Light House Project- Rajkot




Saved kWh of Power due to reduction in construction time]	215051 kWh saved. Typical saving is 4.72 kWh/Sq. mtr compared to building construction using conventional method.
% reduction in cost of construction	10% [Faster construction speed leading to reduction in construction cost]
% reduction in water use	26.67% (For Concrete), Approx 70% (For Masonary Work)
% reduction in Construction waste	10% Approx.[Usage of Tunnel Formwork causing reduction in construction waste]
% Reduction in use of energy	16.67%
% Reduction in embodied energy	25%

Comparison between building envelope of conventional building vs LHP, Rajkot

Conventional Construction Envelope Details

Envelope Type	Conventional Construction Configuration	Section	U Value*
Wall	Interior Surface Film resistance + Internal Cement Mortar (12 mm) + Brick Wall (230mm) + External Cement Mortar (12 mm) + Exterior Surface film resistance		1.97 W/m ² K
Roof	Interior Surface Film resistance + External Cement Mortar (18mm) + RCC slab (150mm) + Internal Cement Mortar (12mm) + Exterior Surface film resistance		2.78 W/m ² K
Fenestration & Glazing	Steel framed Single Glazing Unit (SGU) with 5mm glass, SHGC = 0.84, VLT = 0.89		6.2 W/m ² K
Void	Assumed SHGC = 1, VLT = 1		7W/m ² K
RETV	Residential Envelope Transmittance Value (North-South Blocks)		16.64 W/m ²

LHP Rajkot Construction Envelope Details

Envelope Type	LHP Construction Configuration	Section	U Value*
Wall	Interior Surface Film resistance + Internal Cement Mortar (10 mm) + AAC Block (200mm) + External Cement Mortar (30 mm) + Exterior Surface film resistance		0.68 W/m ² K
Roof	Interior Surface Film resistance + RCC slab (160 mm) + screeding (55 mm) + External Cement Mortar (50mm) + China mosaic + Exterior Surface film resistance		2.74 W/m ² K
Fenestration & Glazing	uPVC framed SGU with 5mm glass thickness, SHGC = 0.83, VLT = 0.89		5.9 W/m ² K
Void	Assumed SHGC = 1, VLT = 1		7W/m ² K
RETV	Residential Envelope Transmittance Value (North-South Blocks)		14.32 W/m ²


CASE STUDY OF DEMO PROJECTS

The Demonstration Housing Projects

Under the Climate Smart Buildings Project in Western Cluster, the CSB Cell have identified and are supporting 2 no. of upcoming affordable housing projects in Ahmedabad to achieve minimum Thermal Comfort standards of MoHUA – GoI.



Zundal, AUDA Project, Ahmedabad

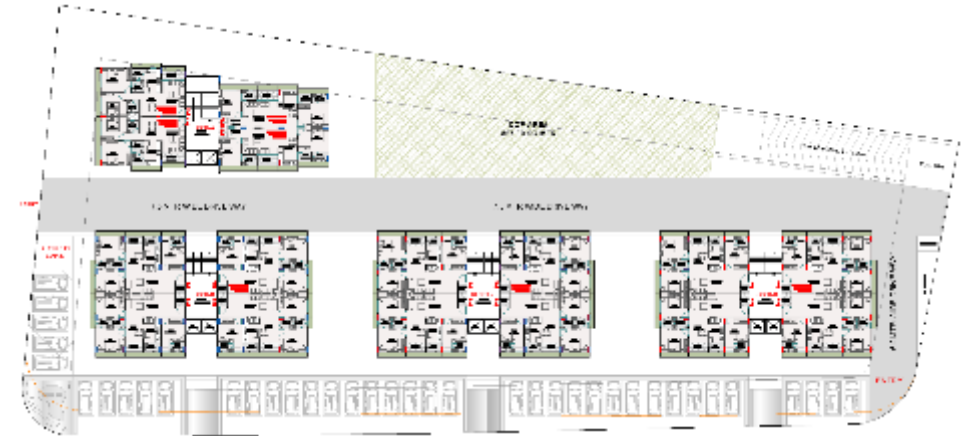


Re-anand, Ahmedabad

Assessment reports on Demonstration Housing Project's performance have been made that highlight on results, conclusions, and recommendations for enhanced thermal comfort and energy efficiency.

ENS compliance and improvements for Demonstration Housing Project

Zundal, AUDA AHP project, Ahmedabad

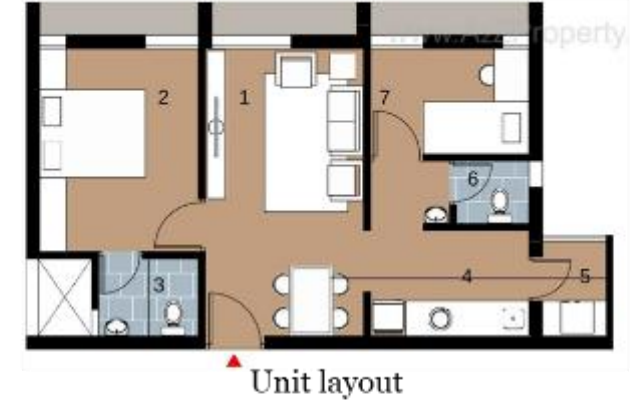

It is recommended to provide roof insulation in order to comply with max. thermal transmittance value for roof and to increase the comfortable hours with in the units.

As designed


Element	U value $W/m^2.k$	RET W/m^2	ENS Part 1 Compliance	ENS Score
WALL				
ACC 150mm + plaster	0.86			
WINDOW		11	✓	132
Aluminium + single glazed	5.8			
ROOF				
120mm concrete slab	2.94	-	✗	

With improvements

Element	U value $W/m^2.k$	RET W/m^2	ENS Part 1 Compliance	ENS Score
WALL				
ACC 150mm + plaster	0.86			
WINDOW		11	✓	140
Aluminium + single glazed	5.8			
ROOF				
150mm concrete slab + EPS Insulation	0.7	-	✓	

ENS compliance and recommendations for Demonstration Housing Project

Re-anand, Private APH project, Ahmedabad

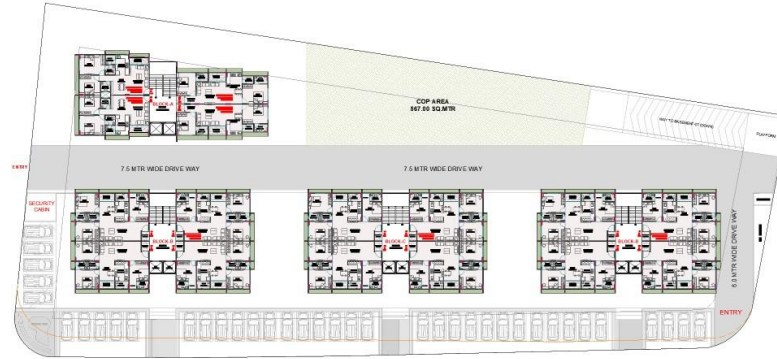






Site layout








Unit layout

It is recommended to provide roof insulation in order to comply with max. thermal transmittance value for roof and to increase the comfortable hours with in the units.


As designed

Element	U value $W/m^2.k$	RETV W/m^2	ENS Part 1 Compliance	ENS Score
WALL 	0.68	11.2		132
WINDOW 	5.8			
ROOF 	2.8	-		

With improvements

Element	U value $W/m^2.k$	RETV W/m^2	ENS Part 1 Compliance	ENS Score
WALL 	0.68	11.2		140
WINDOW 	5.8			
ROOF 	0.6	-		

Thermal Performance of the Demonstration Housing Project

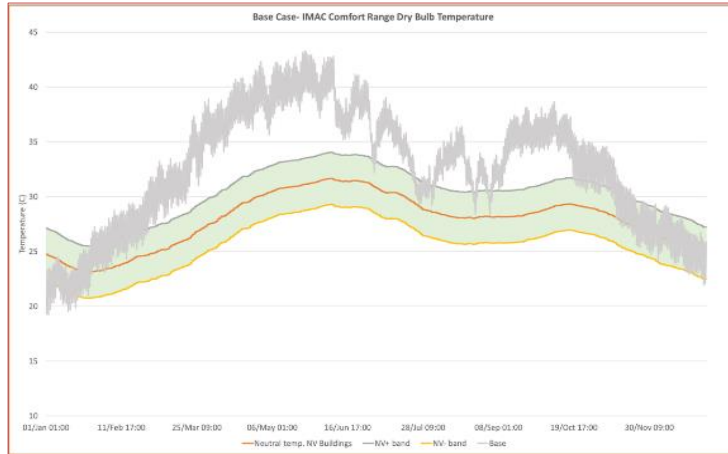


ROOF
150mm concrete slab

ANNUAL DISCOMFORT HOURS
6539 hours

74% of the time in a year the units in the top floor remain uncomfortable

Re – anand Project - Thermal Performance of the top floor unit – without insulation.

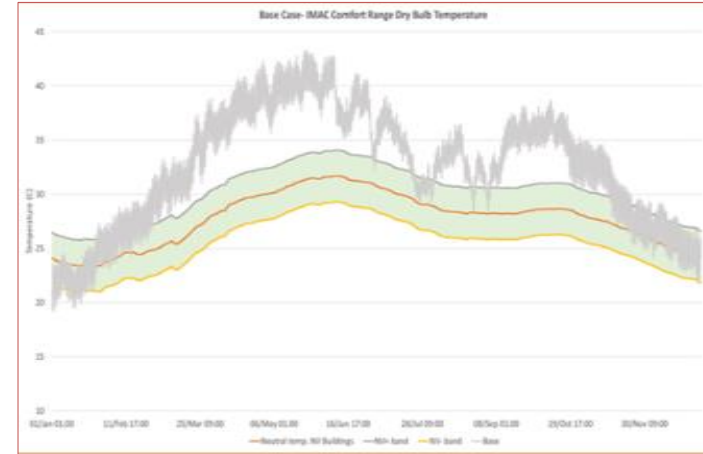


ROOF
150mm concrete slab

ANNUAL DISCOMFORT HOURS
6606 hours

75% of the time in a year the units in the top floor remain uncomfortable

Zundal AHP Project - Thermal Performance of the top floor unit – without insulation.

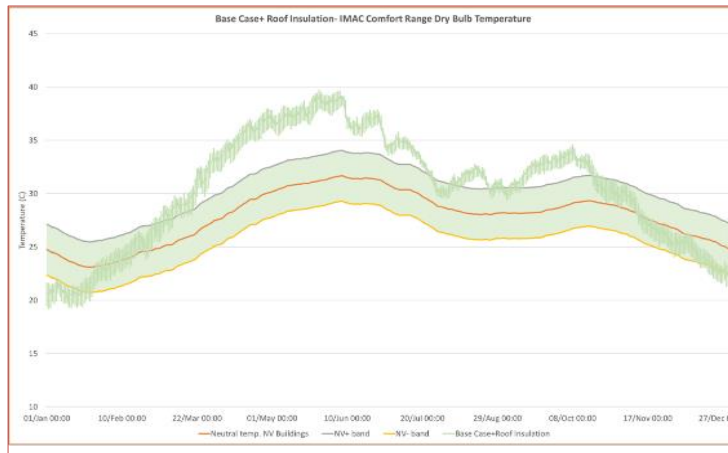


ROOF
150mm concrete slab + 50mm EPS insulation

ANNUAL DISCOMFORT HOURS
5614 hours

64% of the time in a year the units in the top floor remain uncomfortable

Roof insulation provides 14% less discomfort hours when compared to roof without insulation

Re – anand Project - Thermal Performance of the top floor unit – with insulation.

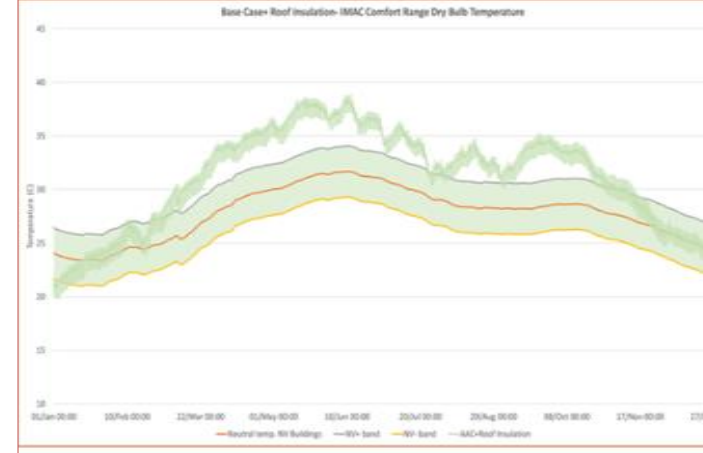

ROOF
150mm concrete slab + 50mm EPS insulation

ANNUAL DISCOMFORT HOURS
6008 hours

68% of the time in a year the units in the top floor remain uncomfortable


Roof insulation provides 9% less discomfort hours when compared to roof without insulation

Zundal AHP Project - Thermal Performance of the top floor unit – with insulation.


Recommendations




Proper orientation of Buildings, this reduce the impact of unfavorable weather conditions like solar radiation, driving rain and thunderstorm




Proper Ventilation – Proper positioning the windows and opening them create air movement in the house. Walls and vegetation should not be too close to the building in order to avoid diversion of wind away from the openings, thereby reducing air flow within the building. If possible, the rooms should be cross ventilated.



Using Shading Device – use of overhangs or horizontal projections over windows. Double pane windows with tinted glass and glass coated with reflective film should be used for windows instead of steels, wood and zincs.



Creation of Microclimate – trees can be planted to create micro – climate that is, small-scale climatic condition at a spot or area or site



Preventing Infiltration – Infiltration can be prevented by sealing the sites of air leaks. This can be achieved by caulking, weatherizing, good workmanship, and replacing some aged parts of buildings, etc.


Recommendations




To align with GHG reduction targets and other government activities, make "Thermal Comfort for All" a government priority, and relate it to India's ambition to give a better quality of life to all of its residents.



Create market momentum for smart cooling through public awareness campaigns, information access, and technical support.



Consistent testing and rating processes, as well as market communication initiatives, can help to mainstream the use of energy efficient building materials and equipment.



Take significant steps to phase out HFCs and encourage the industry to switch to renewable refrigerants.




04

Life Cycle Cost and its impact on Carbon Emission

Concept of life cycle cost and its impact on carbon emission

Life Cycle Cost

Life cycle costing is a method of economic analysis directed at all costs related to constructing, operating, and maintaining a construction project over a defined period of time.

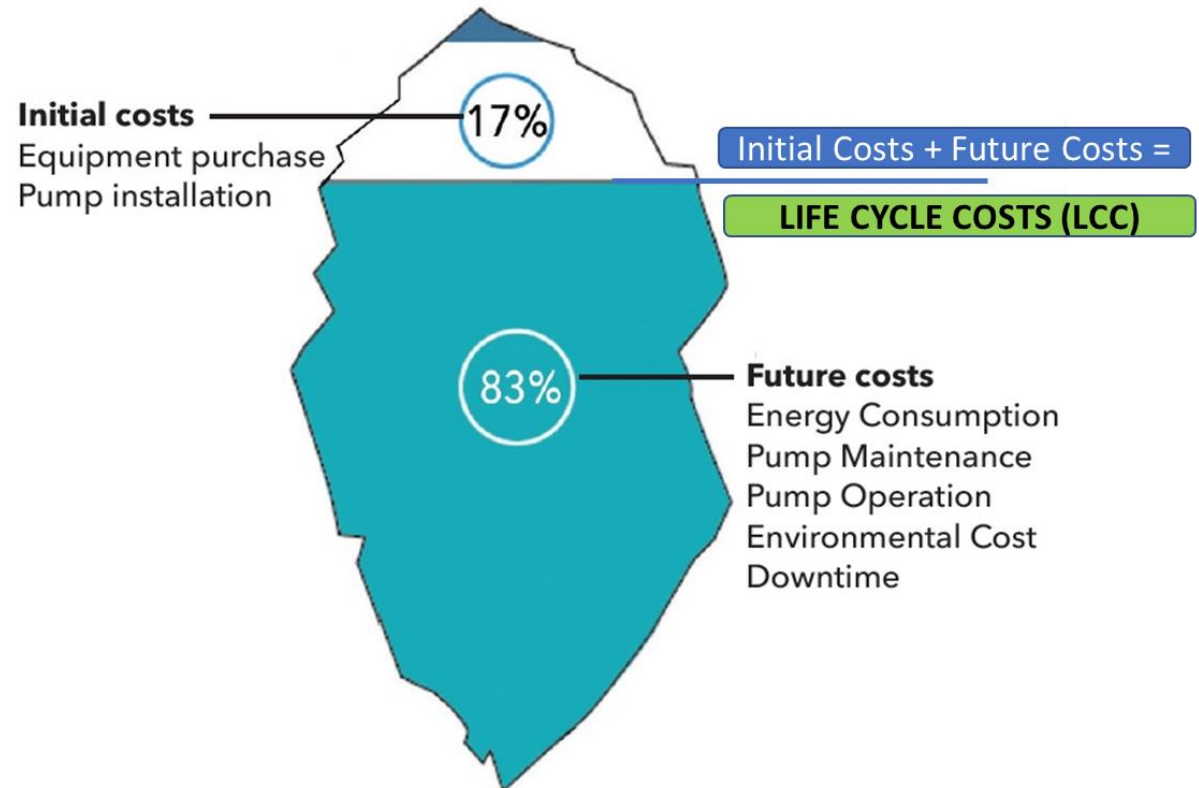

Concept of life cycle cost and its impact on carbon emission


Why LCC matters in sustainable building

Sustainable/green technology in building is commonly more expensive than its traditional counterpart. However, it is more energy efficient, lower operation and maintenance cost. The Energy saving, O&M feature occurs over the life-time of the building. Therefore, It is essential to use the analysis which recognizes the cost saving which spreads over the life-time – the Life Cycle Cost (LCC) analysis

Concept of life cycle cost and its impact on carbon emission

Why LCC matters in sustainable building

Illustration: An Office building

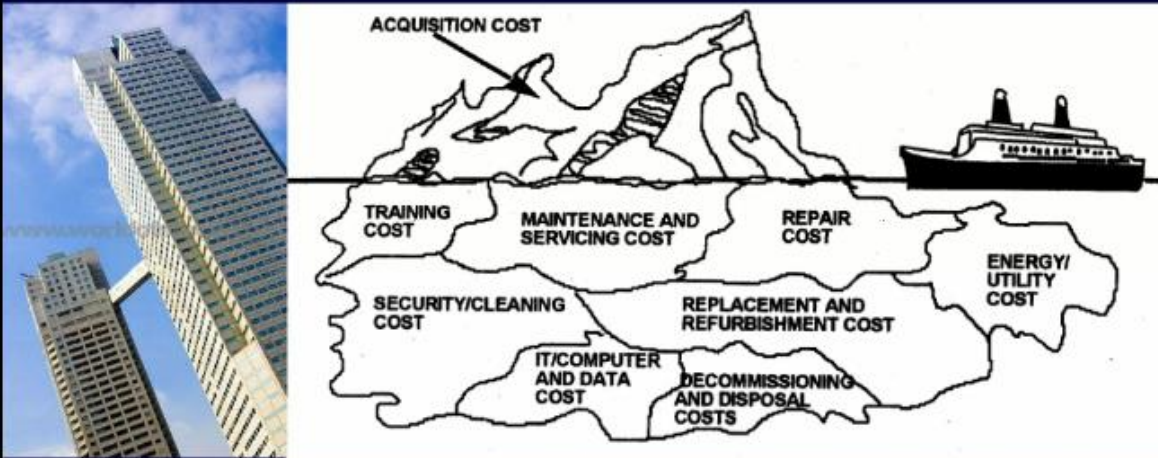

Office building: **1 : 5 : 200***


1 = Construction Cost

5 = Maintenance and Building Operating Costs

200 = Business Operating Costs

*source: The Royal Academy of Engineering

Total LCC = (Investment cost + operation cost + Maintenance + Replacement cost + Disposal cost) – Salvage Value

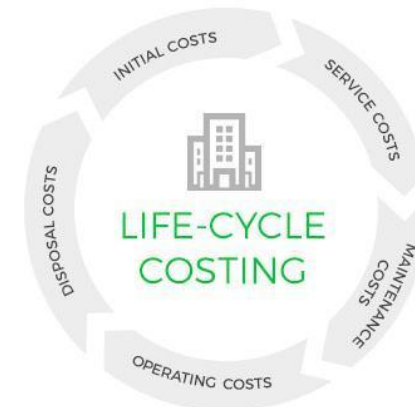


Concept of life cycle cost and its impact on carbon emission

LCC of CFL vs LED



LCC for Lighting system

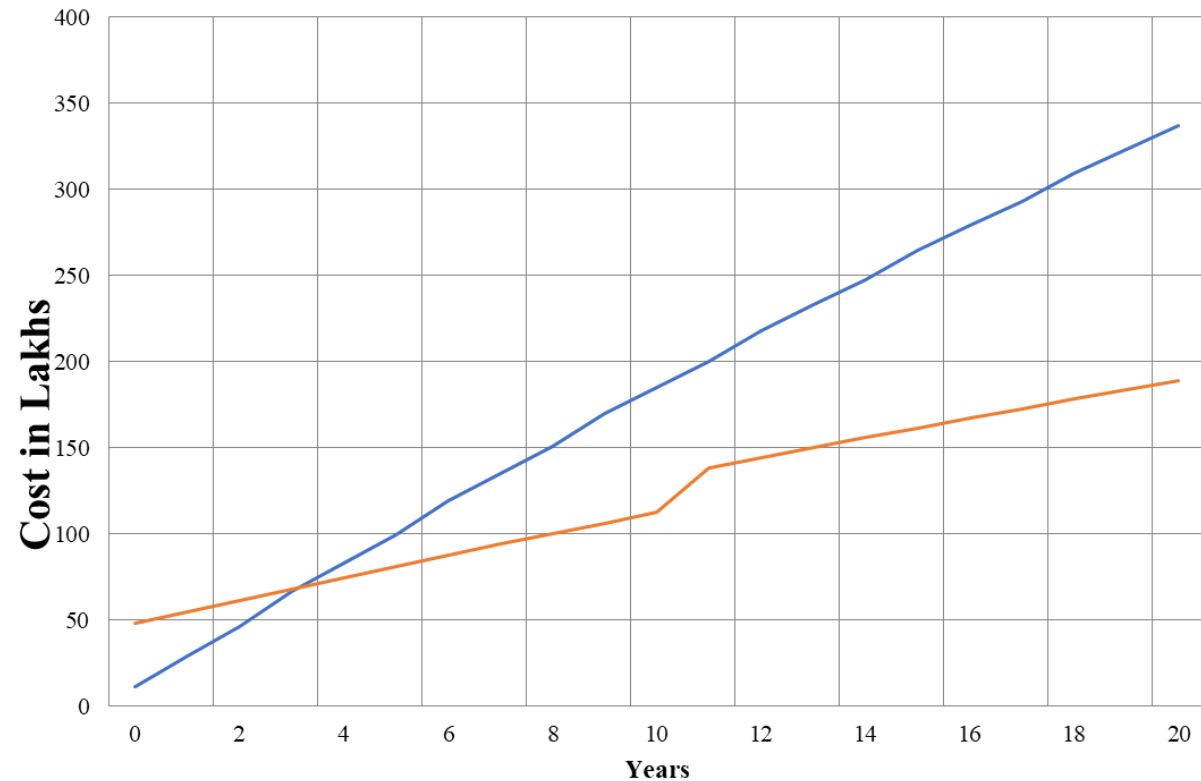

Q&A Session on New & Innovative technologies and Thermal Comfort

Session 2: Importance of Thermal Comfort




05

Thermal Comfort and Cooling Demand

Thermal Comfort & Cooling Demand

Chart Title

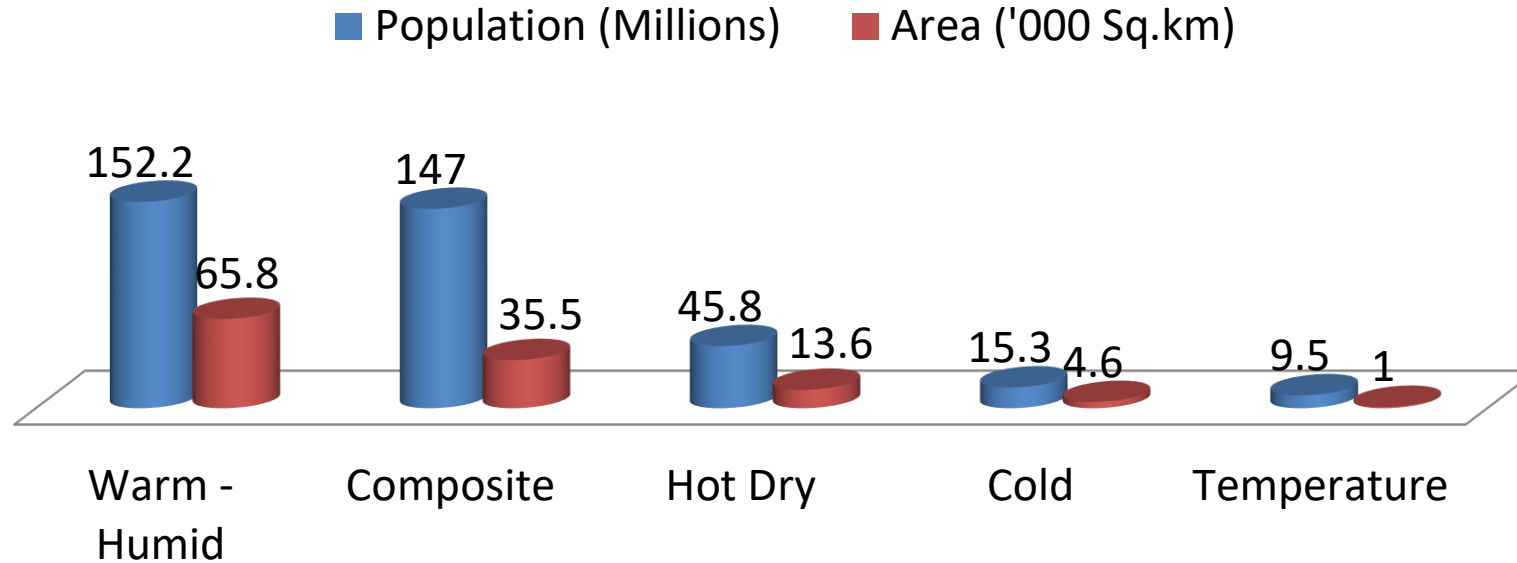


- According to the graph, the major Indian metropolitan areas with urban populations (which make up 35% of the country's total population) are located in warm, humid, and mixed climates.
- Every year, high cooling degree days are experienced by residents of the cities located in these climate zones and the hot, dry climate.

Population and area distribution in the five climate zones of India. Source: "Census 2011", Government of India, (2011), available at: <http://www.censusindia.gov.in/2011census/dchb/DCHB.html>

Thermal Comfort & Cooling Demand

Residential Build – Up Area (Billion m²)


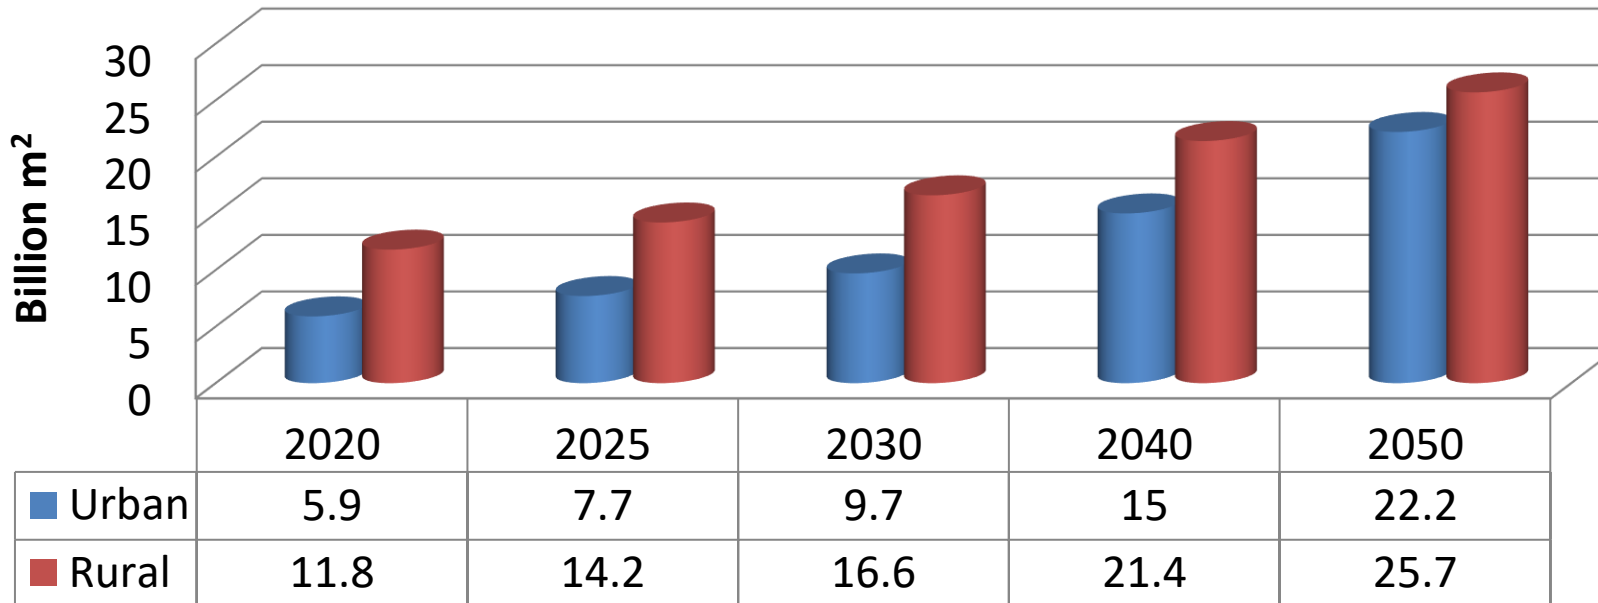


Projected increase in residential built-up area in urban and rural India. Source: ICAP

- Projections of residential built-up area expansion in both urban and rural India are shown in Graph.
- Between 2020 and 2050, it is predicted that the total area of built-up urban residential space will rise by a factor of more than three.
- Over three decades, it is anticipated to increase from 5.9 billion square metres to 22.2 billion square metres (2020-2050).
- In addition, over the same period, the per capita residential built-up area in Indian cities will rise from 12.6 sq. m. to 24.2 sq. m. (MOEFCC, 2019).

Thermal Comfort & Cooling Demand

By 2050, only around two-thirds of our metropolitan building stock will have been constructed. Consequently, our new development must take into account both our current and future cooling needs. To make this happen, it is essential to comprehend how our cooling demand is changing. According to the India Cooling Action Plan, the demand for cooling is expected to increase eight times between 2017–2018 and 2037–2038. In just two decades, the demand for the building sector alone will increase by up to 11 times from the baseline.

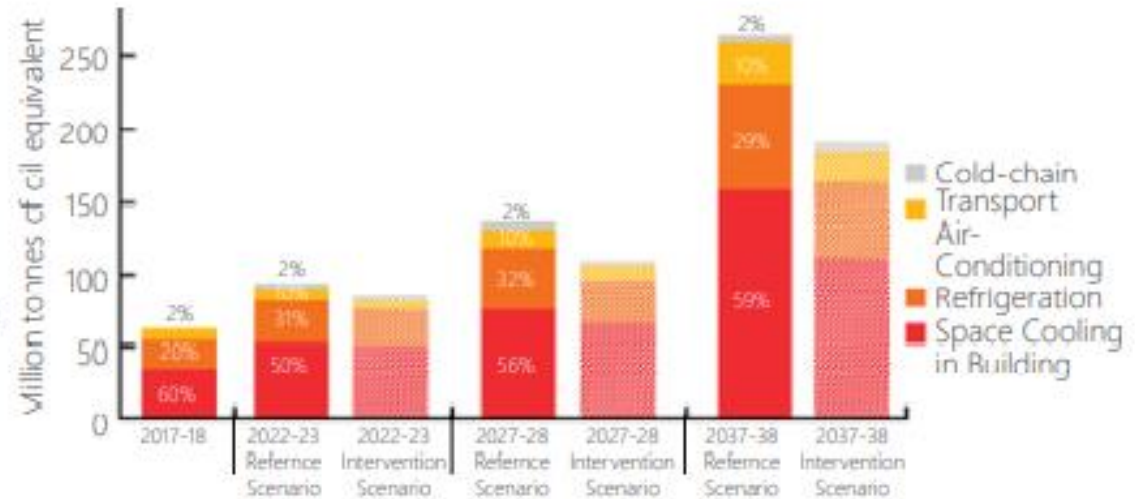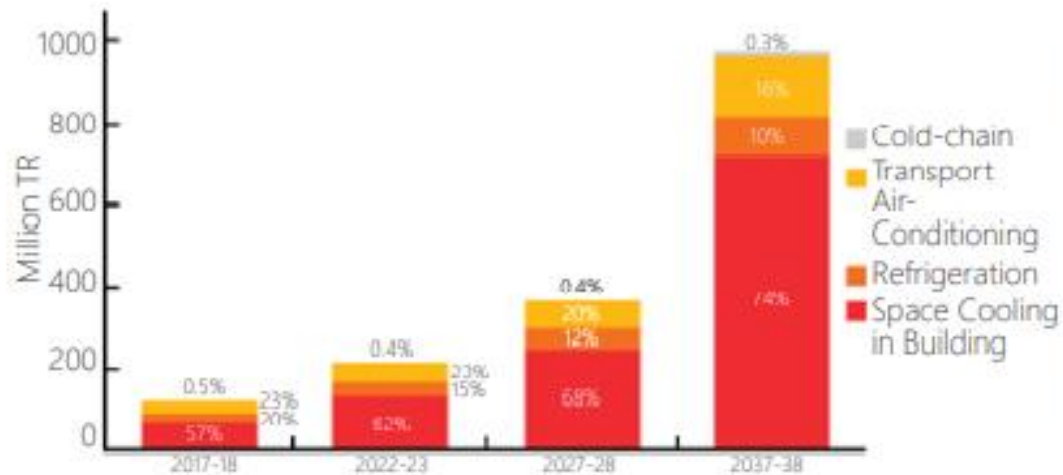

Above: Sector-wise growth in cooling demand; Below: India's Total Primary Energy Supply (TPES) for cooling. Source: India Cooling Action Plan (redrawn)


Need for Thermal Comfort in Buildings: India Cooling Action Plan



1. 20-25% reduction of cooling demand across various sectors by 2037-2038
2. 25-40% reduction in cooling energy requirements by 2037-2038
3. 25-30% reduction in refrigerant demand by 2037-2038
4. Training and certification of 1,00,000 service technicians by 2022-2023
5. Recognizing “cooling and related areas” as a thrust area of research

Source: Ministry of Environment, Forest & Climate Change, Government of India. (2019, March). *India Cooling Action Plan*. Retrieved from <http://ozonecell.nic.in/wp-content/uploads/2019/03/INDIA-COOLING-ACTION-PLAN-e-circulation-version080319.pdf>

Need for Thermal Comfort in Buildings: India Cooling Action Plan

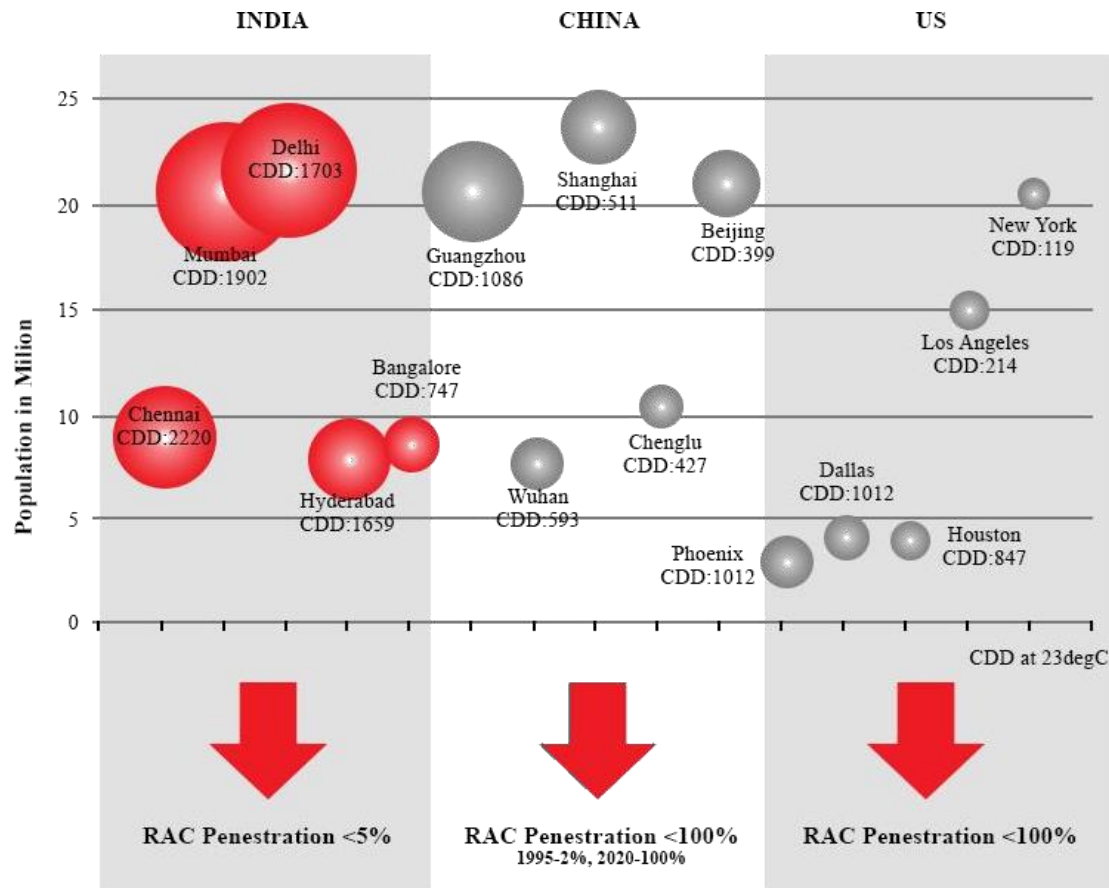


Cooling Demand in India, China, and the US

- To combat uncomfortable conditions
- Leads to increased peak
- Leads to higher consumption

Source: Sustainable and Smart Space Cooling Coalition (2017). Thermal Comfort for All – Sustainable and Smart Space Cooling. New Delhi: Alliance for Energy Efficient Economy

Need for Thermal Comfort in Buildings: India Cooling Action Plan

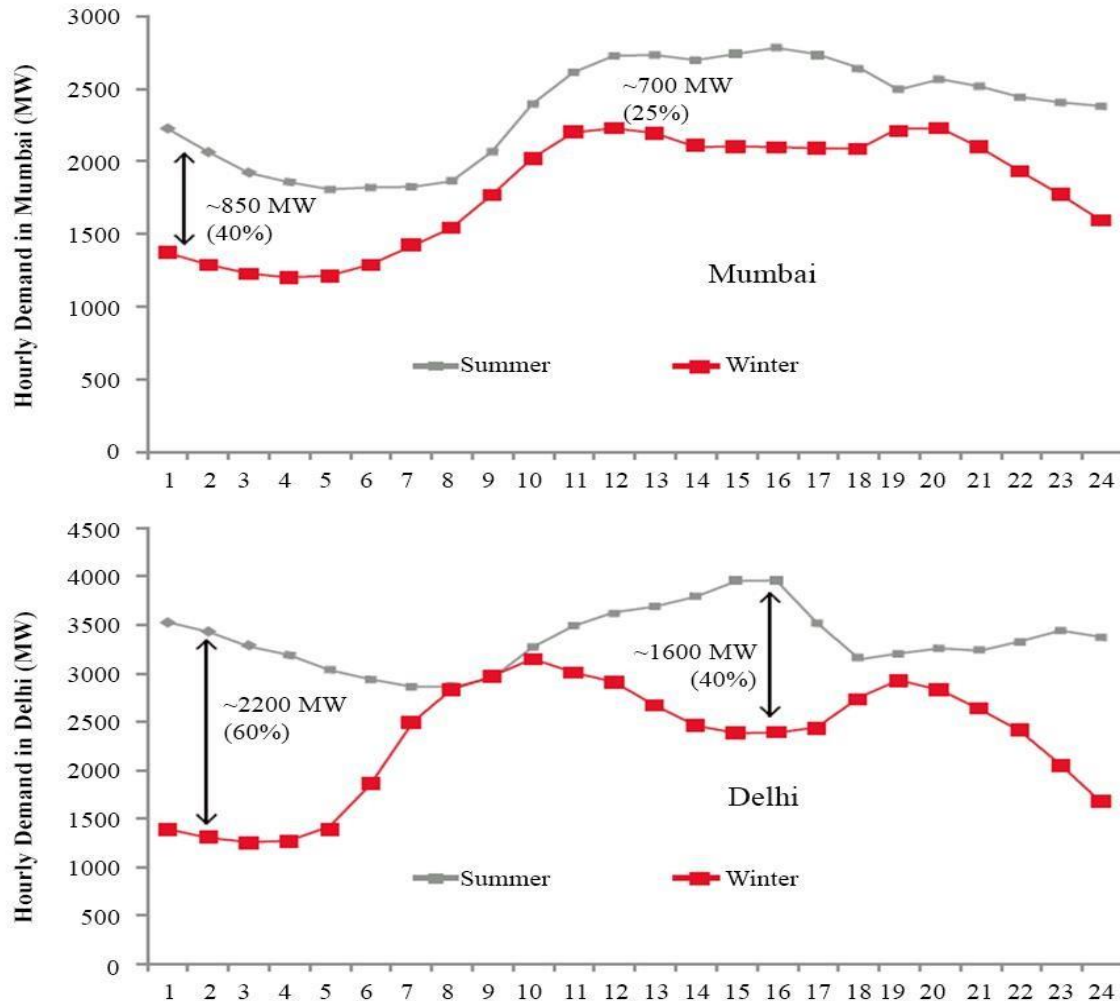

- Summer and Winter Day Profile of Electricity use
- Mumbai and Delhi Comparison
- Leads to higher consumption


Late-night 850 MW to late afternoon 700 in Mumbai
Late-night 2200 MW to late afternoon 1600 in Delhi

Source: Phadke, A., Abhyankar, N., & Shah, N. (2014). *Avoiding 100 New Power Plants by Increasing Efficiency of Room Air Conditioners in India: Opportunities and Challenges.*


<https://international.lbl.gov/publications/avoiding-100-new-power-plants>

Need for Thermal Comfort in Buildings: India Cooling Action Plan

2017 Annual Energy Consumption = 126TWh

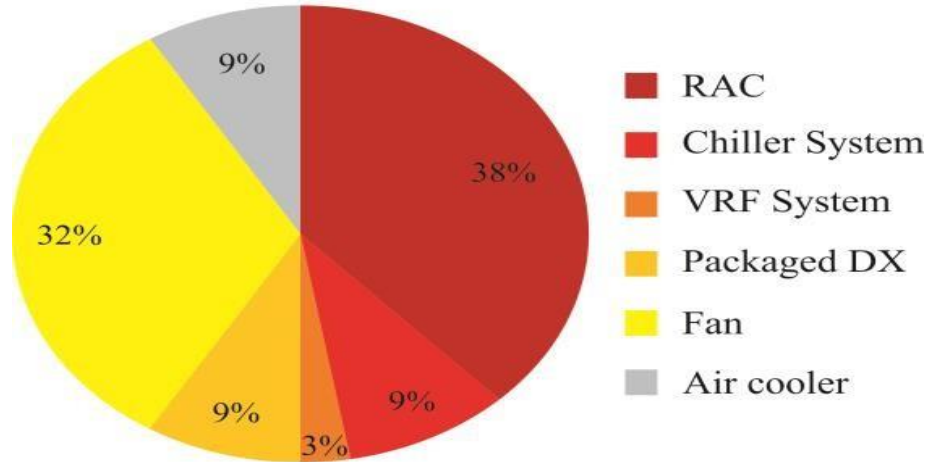

2017 Annual Carbon Emission = 124 mtCO₂e

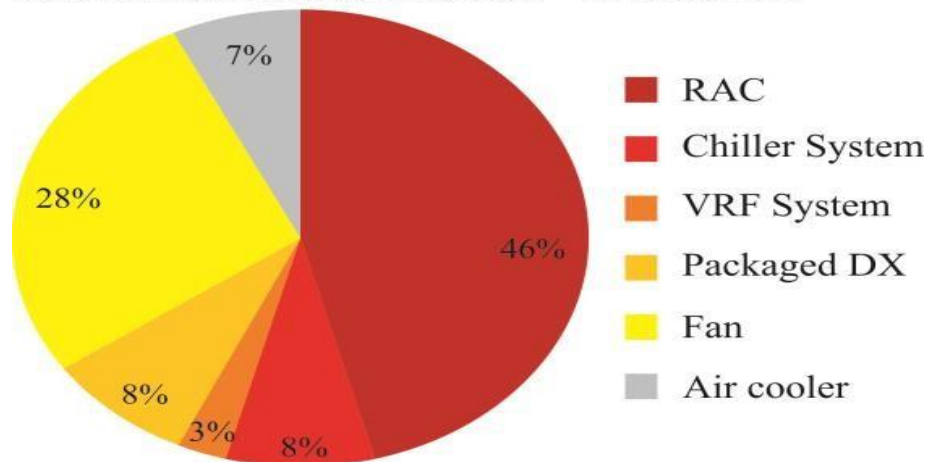

- Total Consumption 126 TWh and 124 MTCO₂e
- Room Air Conditioners 48.8 TWh (38%) consumption
- Room Air Conditioners 57.0 MTCO₂e (46%) Carbon Emission

Source: Ministry of Environment, Forest & Climate Change, Government of India. (2019, March). India Cooling Action Plan. Retrieved from <http://ozonecell.nic.in/wp-content/uploads/2019/03/INDIA-COOLING-ACTION-PLAN-e-circulation-version080319.pdf>

Need for Thermal Comfort in Buildings: India Cooling Action Plan



- In 2017, approximately 272 million households were estimated in India
- Expected to increase to 328 by 2027
- 386 million by 2037

Source: Ministry of Environment, Forest & Climate Change, Government of India. (2019, March). India Cooling Action Plan. Retrieved from <http://ozonecell.nic.in/wp-content/uploads/2019/03/INDIA-COOLING-ACTION-PLAN-e-circulation-version080319.pdf>



- In 2017, approximately 8% of the households were estimated to have room air conditioners
- Anticipated to rise to 21% by 2027-28
- And 40% by 2037-38



- In 2017, the estimated commercial floor was around 1.2 million sqft
- Is expected to grow about 1.5 to 2 times by 2027-2028
- 2.5 to 3 times by 2037-38, respectively



06

Factors affecting Thermal Comfort and Cooling Demand

Factors affecting Thermal Comfort



PHYSIOLOGICAL FACTORS

The factors which are independent from weather and surrounding environment of the building. And are very subjective and depend on person to person



PHYSICAL FACTORS

The factors which are dependent on weather and surrounding environment of the building. Some of which can be managed



PHYSICAL FACTORS

+

•01

•Air Temperature

+

•02

•Mean Radiant
Temperature

+

•03

•Radiant Temperature
Asymmetry

+

•04

Floor Surface
Temperature

+

•05



•Relative Humidity

+


•06

•Air Speed

Thermal Comfort – Cold – Neutral - Warm

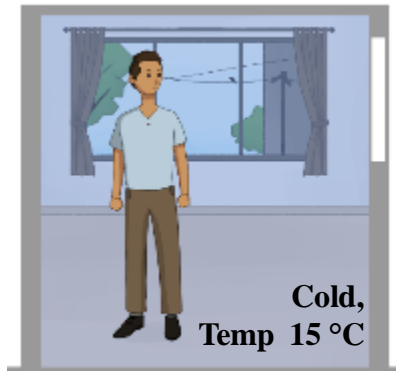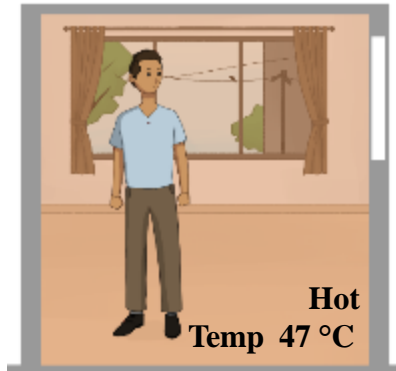


Air Temp 27 °C

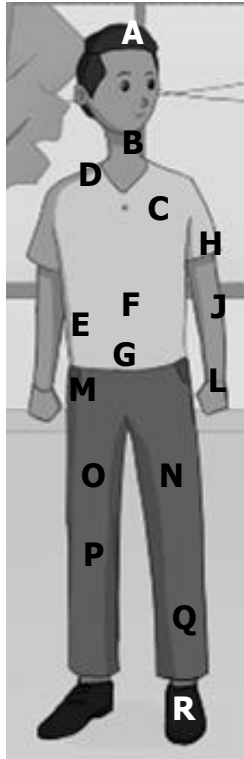


Body Part	Skin Location	Cold (15 °C)	Neutral (27°C)	Hot (47 °C)
A	Forehead	31.7	35.2	37
B	Back of Neck	31.2	35.1	36.1
C	Chest	30.1	34.4	35.8
D	Upper Back	30.7	34.4	36.3
E	Lower Back	29.2	33.7	36.6
F	Upper Abdomen	29	33.8	35.7
G	Lower Abdomen	29.2	34.8	36.2
H	Tricep	28	33.2	36.6
J	Forearm	26.9	34	37
L	Hand	23.7	33.8	36.7
M	Hip	26.5	32.2	36.8
N	Side thigh	27.3	33	36.5
O	Front thigh	29.4	33.7	36.7
P	Back thigh	25.5	32.2	36
Q	Calf	25.1	31.6	35.9
R	Foot	23.2	30.4	36.2

Factors Affecting Thermal Comfort – Air Temperature

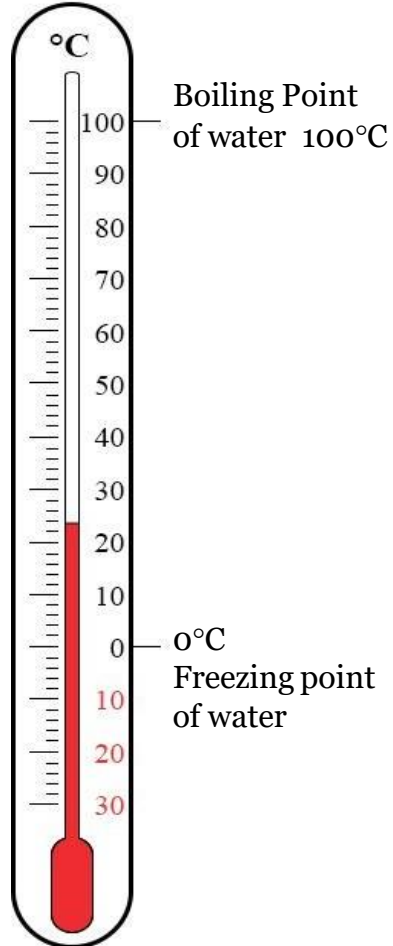


- Temperature of the air surrounding the Environment (Dry Bulb Temperature) – DBT)
- Measured in Degrees Celsius (°C), by a thermometer freely exposed to the air, but shielded from radiation and moisture.
- Affects the rate of Evaporation on skin surface of building occupants.

Factors Affecting Thermal Comfort – Relative Humidity [RH]

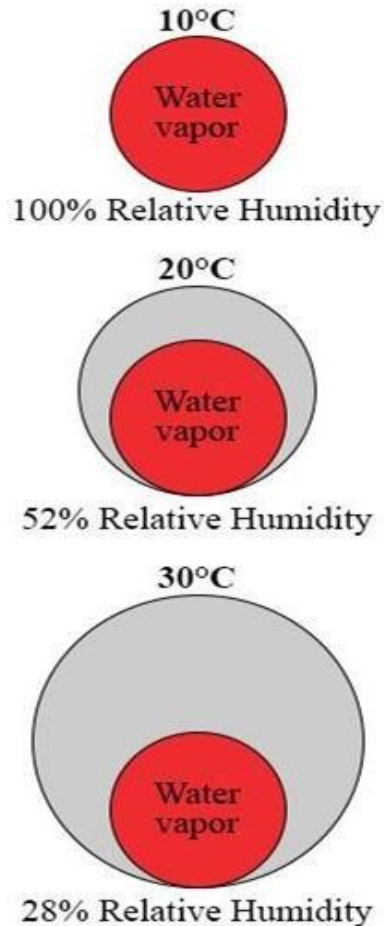



- It is defined as %ge of Amt. of water vapour present in air to max. amount of water vapour that air can hold at specific temperature and pressure.
- Affected by DBT and Pressure of Air.
- Higher the RH of the air, hotter it will feel for Building Occupants.

Factors Affecting Thermal Comfort – Mean Radiant Temperature [MRT]

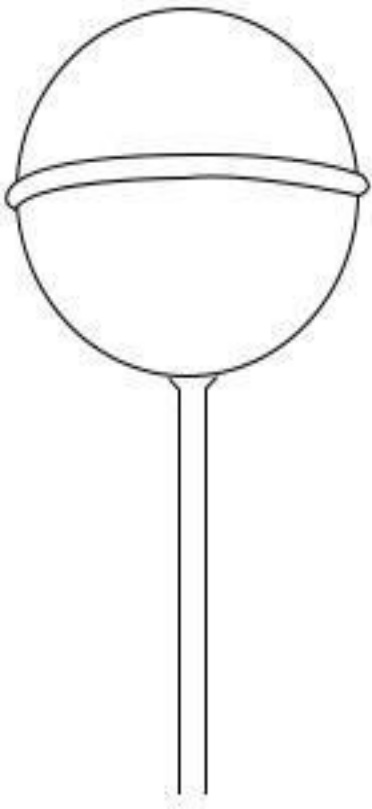

- MRT is defined as uniform temperature of an imaginary enclosure in which the radiant heat transfer from the human body is equal to the radiant heat transfer in the actual non-uniform enclosure.
- Depends on ability of a surface to emit the incident heat, also known as emissivity of the material
- Calculated using Globe Temp. (T_g) & Air Temp. (T_a).

Factors Affecting Thermal Comfort – Air Speed

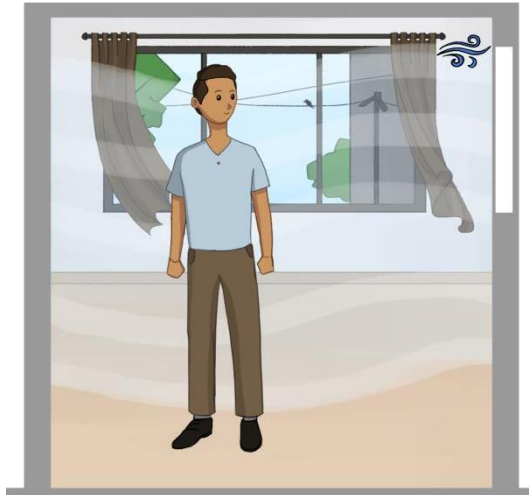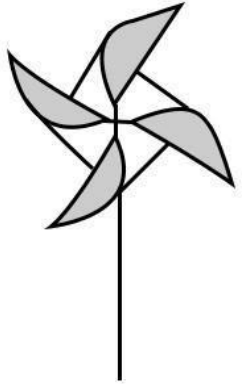

- Air Speed is defined as the average speed of the air surrounding an occupant, with respect to location, and time.
- Measured in Meter per second (m/s)
- Elevated air speeds can be used to improve thermal comfort beyond the maximum limit of temperature established by codes and standards (ASHRAE, 2021)

Factors Affecting Thermal Comfort – Clothing Value



- Can be defined as “The resistance to sensible heat transfer provided by clothing ensemble”.
- The insulation provided by an individual garment includes effective resistance of the garment material and the thermal resistance of the air layer trapped between the garment and the skin (CIBSE, 2015).
- Clothing Insulation Value (clo - I_{cl}).

CLOTHING	Clo
T-shirts, shorts, Light socks, Sandals	0.30
Shirt, Trousers socks, Shoes	0.70
Jacket, Blouse, Long skirt, stockings	1.00
Trousers, Vest, Jacket Coat, Socks Shoes	1.50

CLOTHING LEVELS & INSULATION

Factors Affecting Thermal Comfort – Metabolic Rates



- Metabolic Rate can be defined as level of transformation of chemical energy into heat and mechanical work by metabolic activities within an organism.
- Expressed in met units where $1 \text{ met} = 58.2 \text{ W/m}^2$.
- Depends on activity level, age, fitness level, etc. of a person.

ACTIVITY	Met
Seated, Relaxed	1.0
Sedentary Activity (office, dwelling, school, laboratory)	1.2
Standing, Light Activity (shopping, laboratory, light industry)	1.6
Standing, Medium activity (shop assistant, domestic work, machine work)	2.0

METABOLIC RATE

Factors affecting Thermal Comfort - Others

- **Acclimatization**
 - Short-term physiological adjustments
 - Long-term endocrine adjustments
- **Body shape and fat**
- **Age and gender**
- **Status of health**



Short term
physiological
adjustments



Long term physiological
adjustments



Age



Gender




Health &
Wellbeing



07

Contemporary Approaches for achieving Thermal Comfort in buildings

Measures to Improve Thermal Comfort

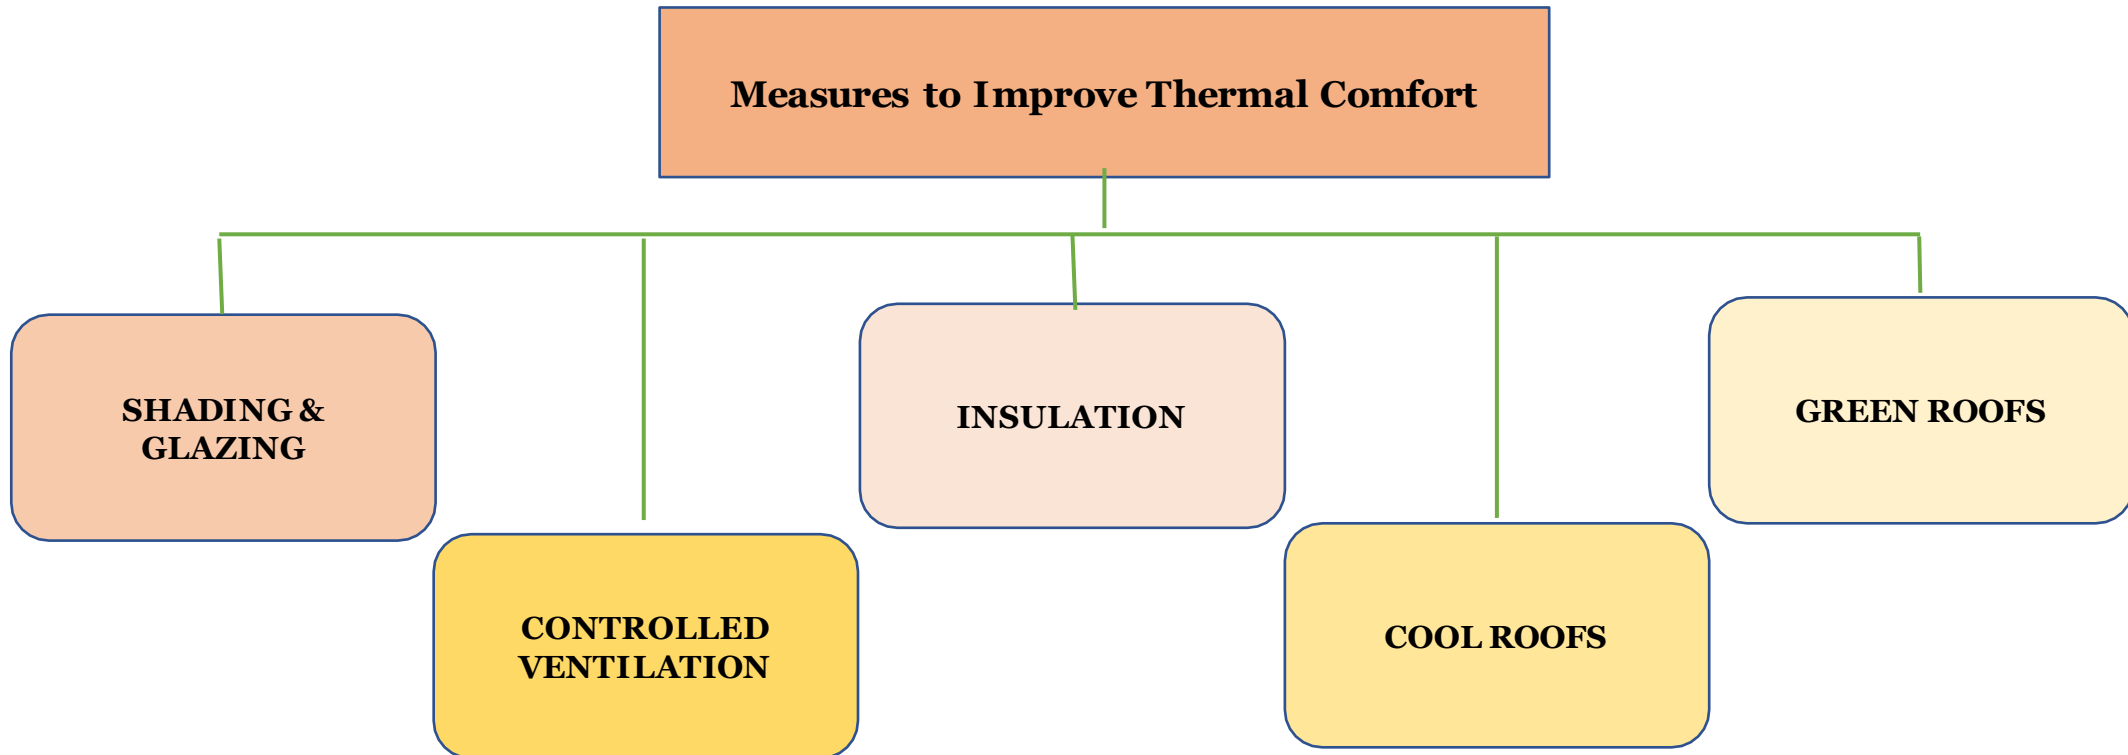

Shading & Glazing

Shading reduces internal heat gain through coincident radiation.


VARIOUS METHODS TO SHADE WINDOWS					
Overhangs	Awnings	Louvers	Vertical Fins	Light Shelves	Natural Vegetation

These can reduce cooling energy consumption by 10-20%

The shading mechanism can be fixed or movable (manually or automatically) for allowing varying levels of shading based on

- 1. the sun's position and**
- 2. movement in the sky**

Shading & Glazing

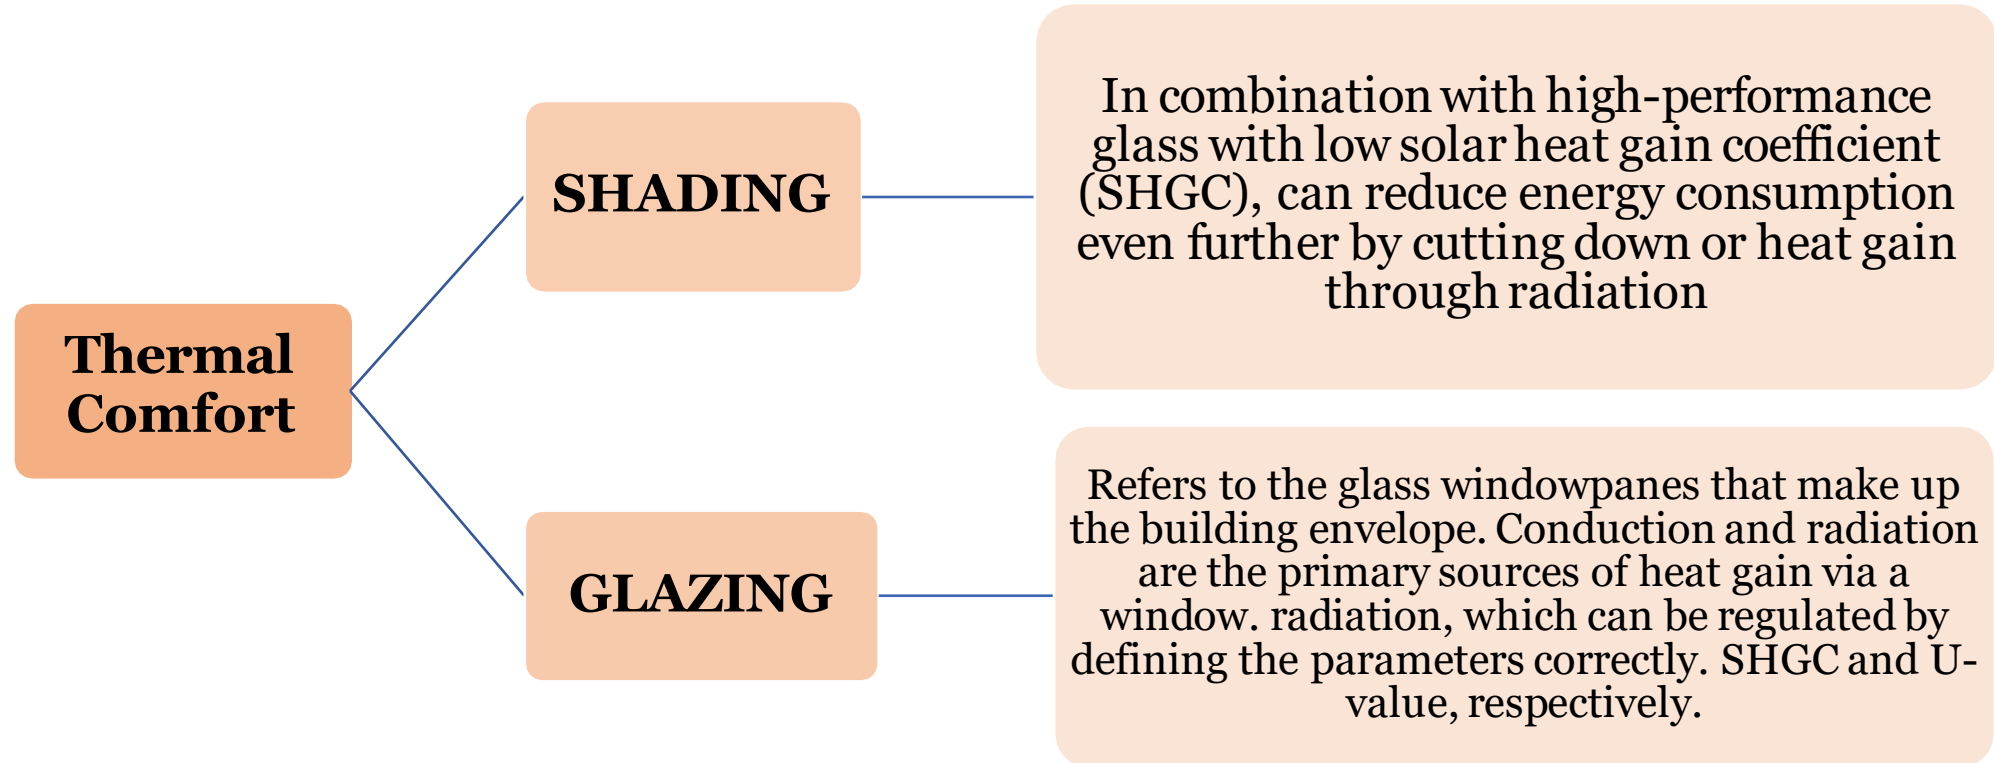


Controlled Ventilation

**BUILDING CAN BE
DESIGNED AS**

**CROSS
VENTILATION**

**STACK
VENTILATION**

**SINGLE-SIDED
VENTILATION**

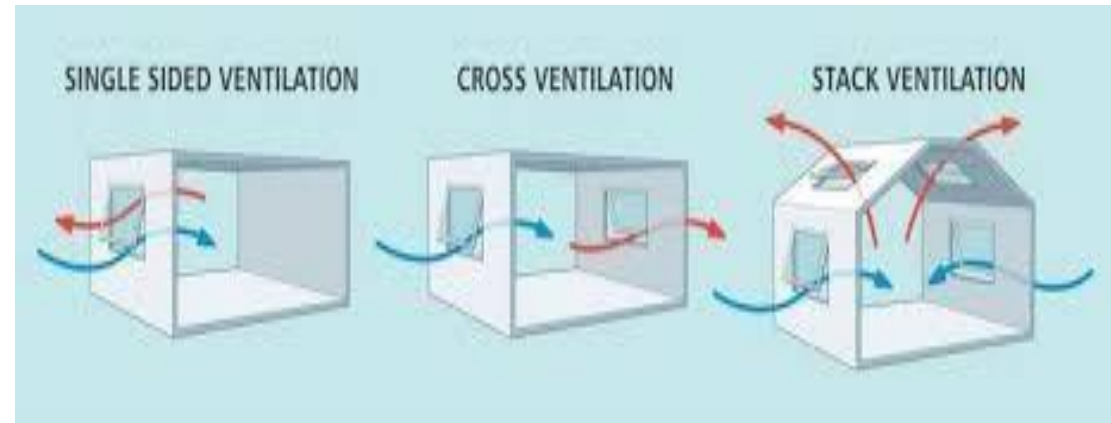

Controlled Ventilation

Designing windows and vents to dissipate warm air and allow the ingress of cool air can reduce cooling energy consumption by 10-30%

Air Velocity range between 0.5 to 1 m/s **Drops temperature at about 3 °C at 50% relative Humidity**

AIR VELOCITY OF 1 m/s

Office Environment

Too High

Home Environment

Acceptable (Especially if there is no resource to active air conditioning.)





Controlled Ventilation

Natural ventilation takes advantage of the differences in air pressure between warm air and cool air, as well as convection currents, to remove warm air from an indoor space and allow fresh cooler air in.

This also has the added advantage of cooling the walls and roofs of the buildings that hold significant thermal mass, further enhancing the thermal comfort of the occupants

NATURAL VENTILATION		Even in hot-dry and warm-humid climate zones where some air-conditioning may be required during peak Thermal Comfort for All summer, buildings can be designed to operate in a mixed mode to enable night ventilation and natural ventilation during cooler seasons
With Breeze Air	Works Best	
Absence of natural breeze	Fans can be used to improve the flow of cool air	
Natural ventilation promotes the occupants' adaptation to external temperature, called adaptive thermal comfort		

Insulation

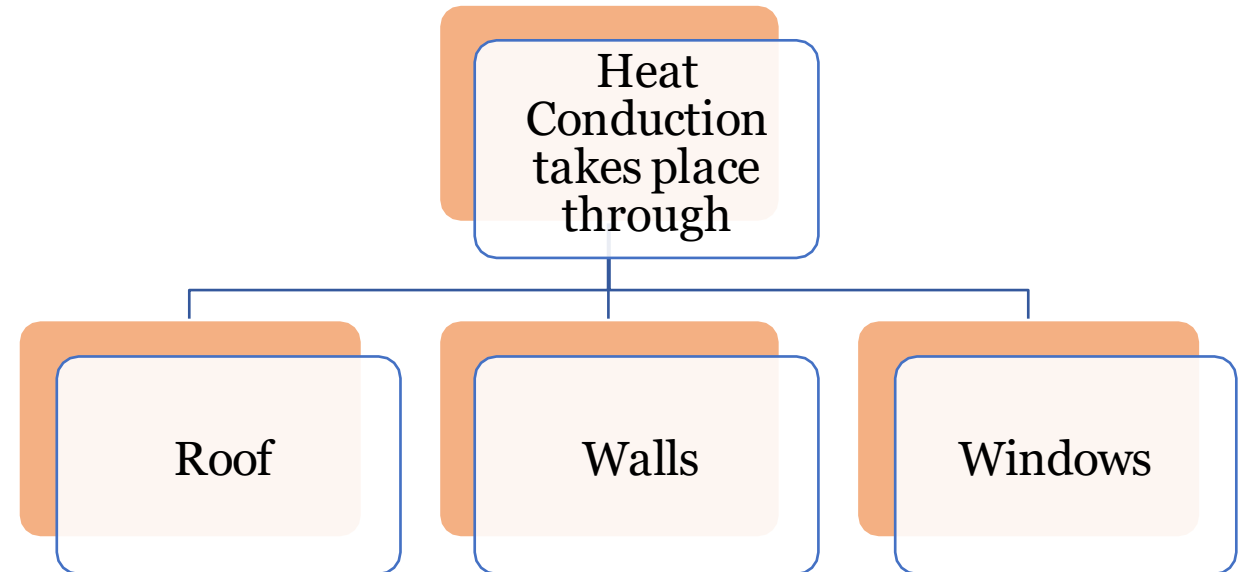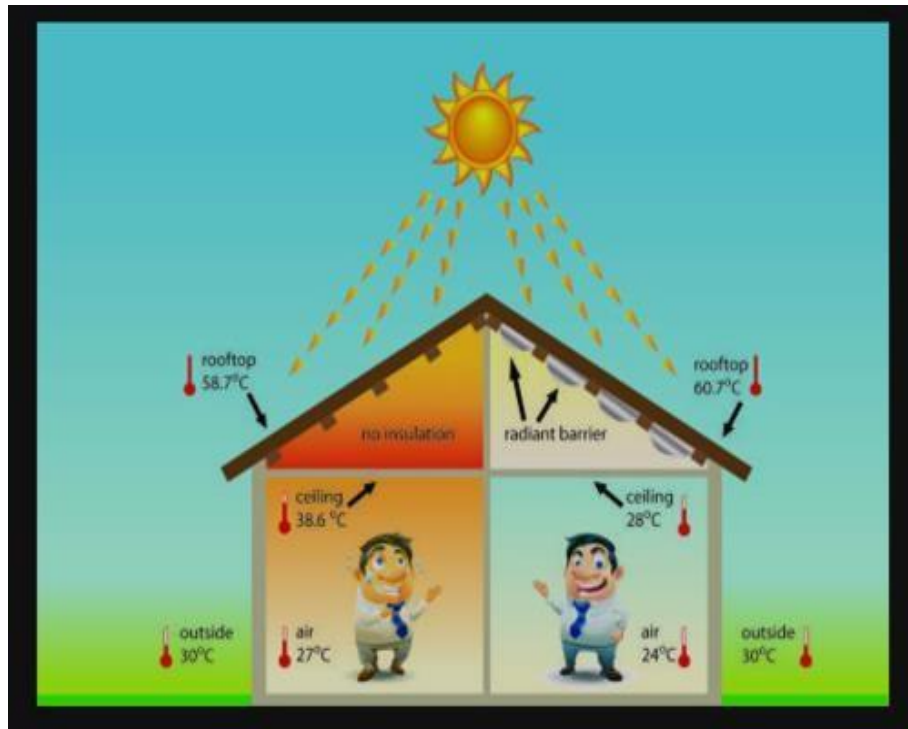


An insulating material can resist heat transfer due to its low thermal conductivity. Insulating walls and the roof can reduce cooling energy loads by up to 8%

Cool Roofs

Cool roofs are one of the passive design options for reducing cooling loads in buildings. Cool roofs reflect most of the sunlight (about 80% on a clear day)

When sunlight is incident on a dark roof	When Sunlight is incident on a cool roof
38% heats the atmosphere	10% heats the environment
52% heats the city air	8% heats the city air
5% is reflected	80% is reflected
	1.5% heats the building

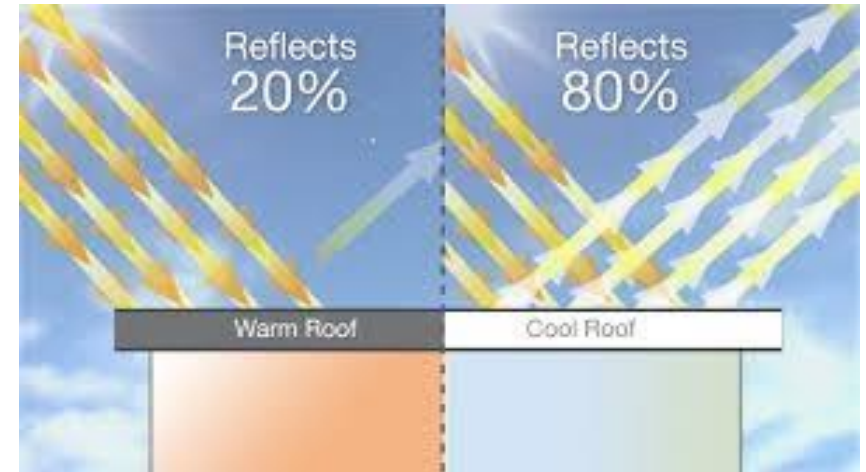

Cool Roofs

In the summer, a typical cool roof surface temperature keeps 25-35°C cooler than a conventional roof, lowering the internal air temperature by roughly 3-5°C and improving the thermal performance.

The comfort of the inhabitants is improved, and the roof's lifespan is extended.

Cool roofs increase the durability of the roof itself by reducing thermal expansion and contraction.

Apart from helping enhance the thermal comfort in the top floor and helping reduce air-conditioning load, cool or white roof or pavements also offer significant reduction in urban heat island effect



The cities of Jodhpur and Jaipur are from extremely hot state of Rajasthan, where most of the city homes are painted in light blue and light pink colours, are examples of practical application of this age-old traditional design style.

Green Roofs

A green roof is a roof of a building that is partially or completely covered with vegetation

GREEN ROOFS PURPOSE

Absorbing Rain Water

Providing Insulation

Helping lower urban air
temperatures

Mitigating the urban
heat island effect



Green Roofs

Reduction in Energy use is an important feature of Green Roofing

GREEN ROOFS IN BUILDINGS ALLOWS

During cooler Winter Months

Retain their heat

During hotter Summer Months


Reflecting and absorbing solar radiations




08

Thermal Comfort Metrics


Thermal Comfort Metrics – Preference, Comfort and Acceptability

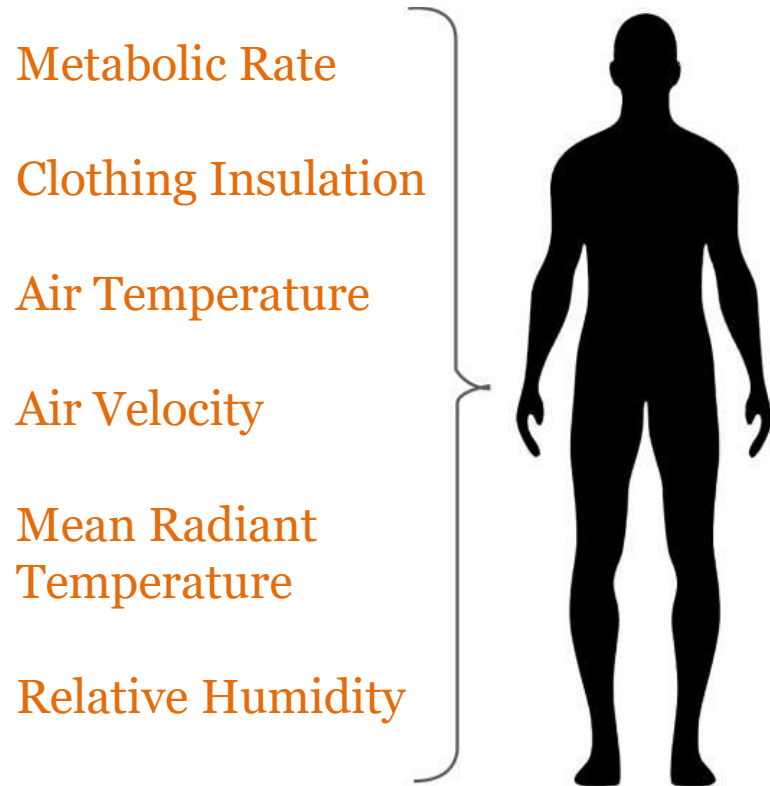

PMV Balance

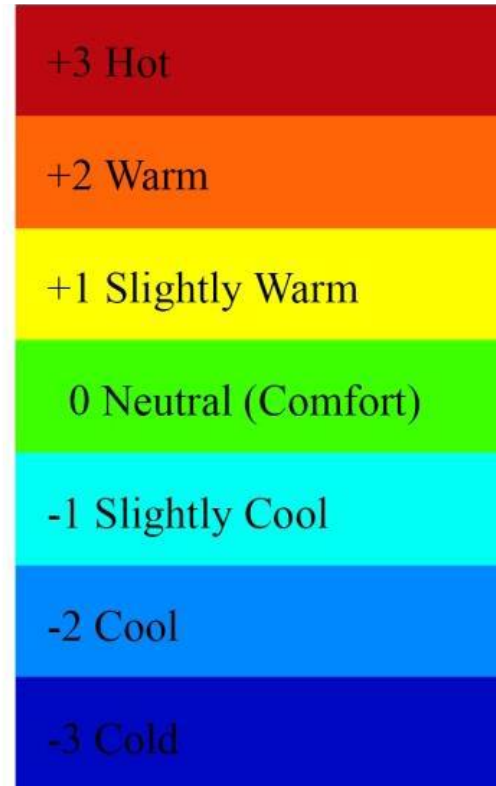

Thermal Comfort Metrics


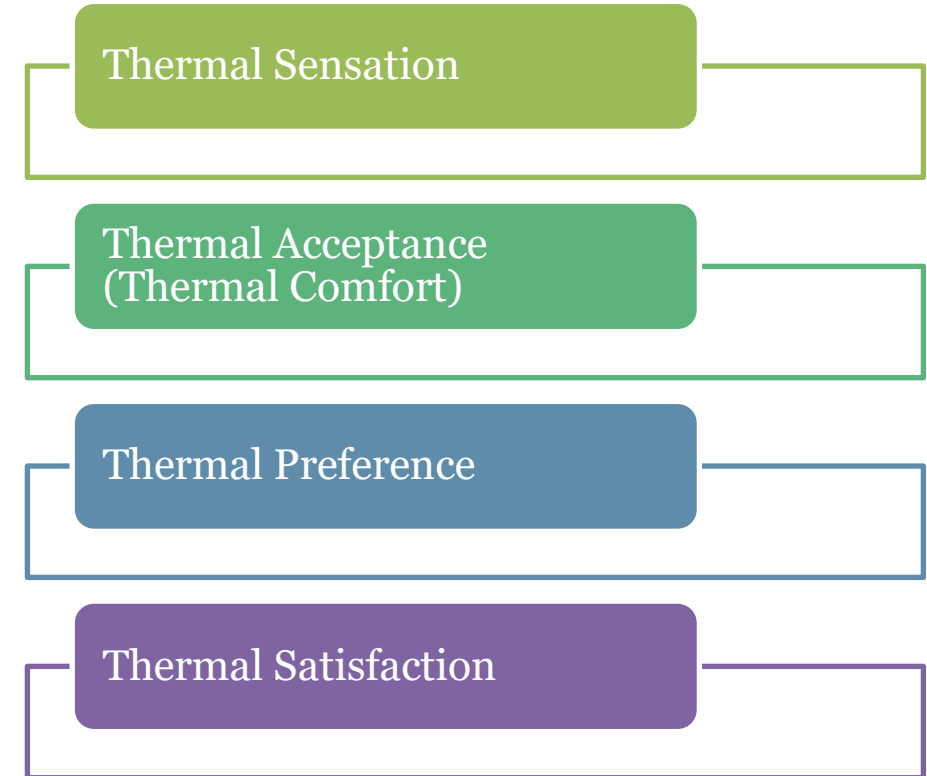


$$\text{Storage} = \text{Production} - \text{Loss}$$

Thermal Comfort Metrics – Preference, Comfort and Acceptability

PMV	Sensation Value	Acceptance Value	Preference Value
-3	Cold	-	-
-2	Cool	Very Unacceptable	Want Cooler
-1	Slightly Cool	Unacceptable	Want Slightly Cooler
0	Neutral	-	No Change
+1	Slightly Warm	Acceptable	Want Slightly Warmer
+2	Warm	Very Acceptable	Want Warmer
+3	Hot	-	-

Thermal Comfort Metrics – PMV

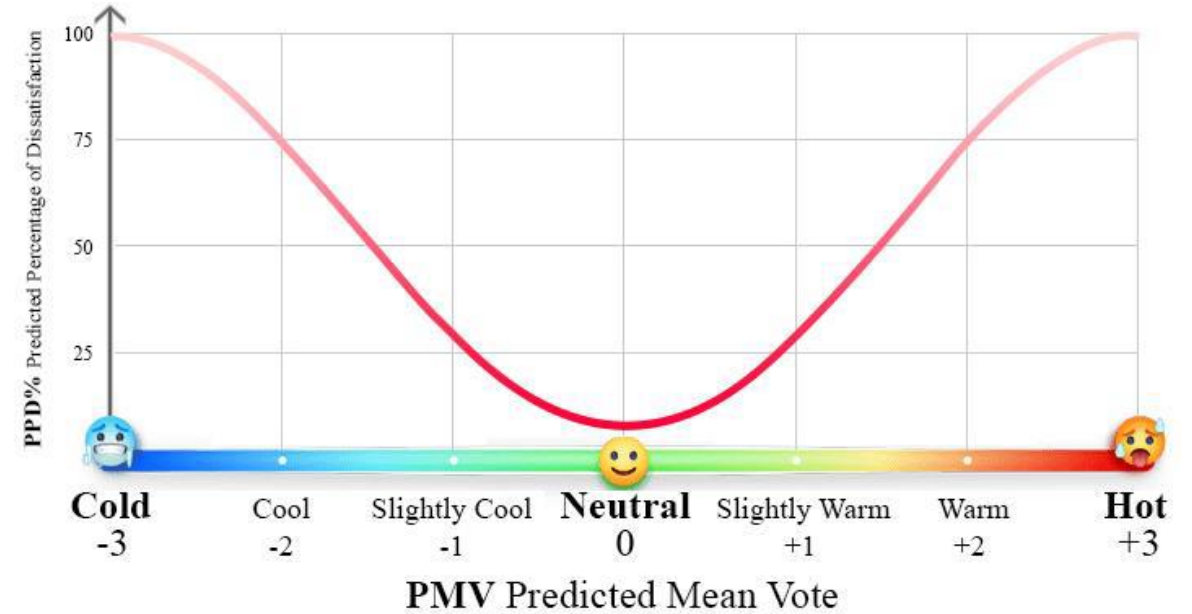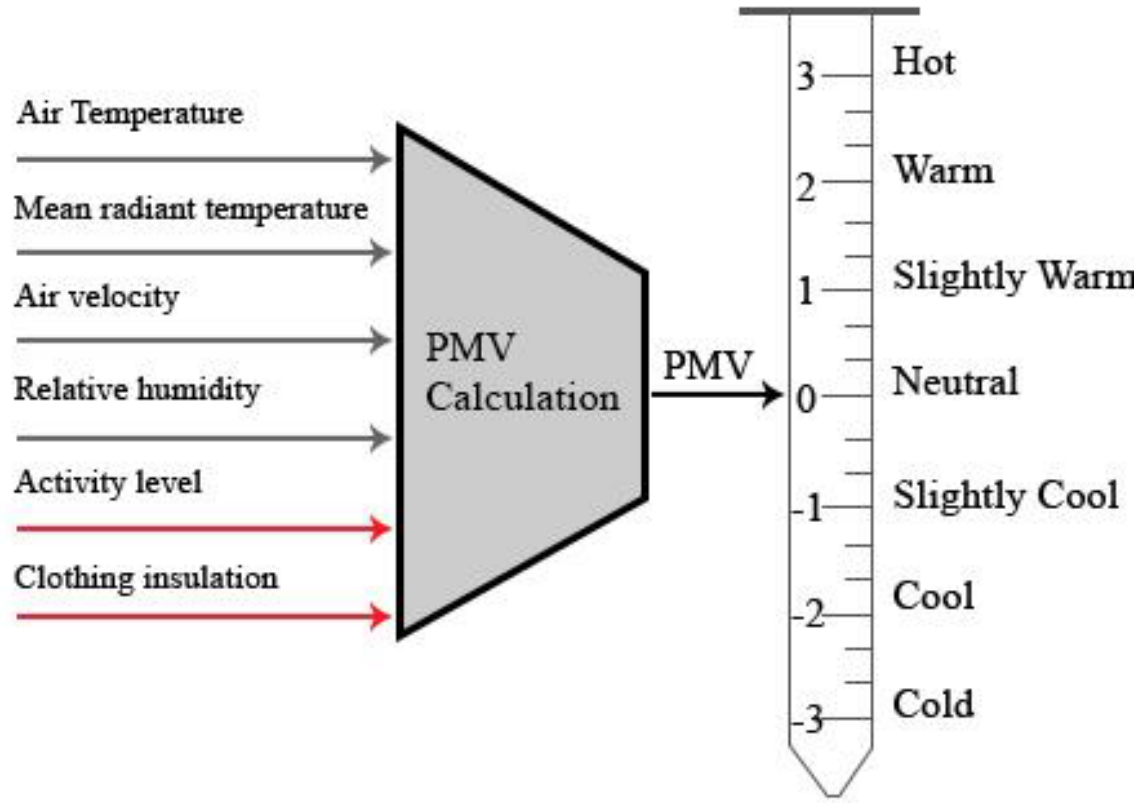

Acceptable thermal comfort bands listed in ISO 7730:2005

Band	PMV Range
A	$-0.2 < \text{PMV} < +0.2$
B	$-0.5 < \text{PMV} < +0.5$
C	$-0.7 < \text{PMV} < +0.7$

Source: Guenther, S. (2021). What Is Pmv? What Is Ppd? The Basics of Thermal Comfort. Simscales. Retrieved from <https://www.simscales.com/blog/2019/09/what-is-pmv-ppd/>

Thermal Comfort Metrics – PPD

Predicted Percentage of Dissatisfied occupants (PPD) refers to the percentage of occupants likely to experience thermal dissatisfaction out of the total number of occupants. ISO 7730:2005 defines the hard limit as ranging between -2 and +2, for existing buildings between -0.7 and +0.7, and new buildings ranging between -0.5 and +0.5.

PPD ranges corresponding to acceptable PMV ranges as defined in ISO 7730:2005

Band	PMV Range	PPD%	Temperature (°C)
A	$-0.2 < PMV < +0.2$	< 6	24.5 ± 1
B	$-0.5 < PMV < +0.5$	< 10	24.5 ± 1.5
C	$-0.7 < PMV < +0.7$	< 15	24.5 ± 2.5

Thermal Comfort Metrics – Degree Discomfort Hours

- ❑ Calculated based on India Model for Adaptive (thermal) Comfort (IMAC).
- ❑ Summation of difference of hourly operative temperature and IMAC band acceptable temperature only for hours when temperature goes outside IMAC temperature band with 80% or 90% acceptability range.

Formula for DDH (Annual)

$$DDH \text{ (annual)} = \sum_{i=1}^{8760} |T_i - T_{\text{acceptable}}|$$

$$T_{\text{acceptable}} = T_{\text{lower}} \text{ when } T_i < T_{\text{lower}}$$

$$T_{\text{acceptable}} = T_{\text{upper}} \text{ when } T_i > T_{\text{upper}}$$

• T_i – Measured or Achieved Operative Temp. at i^{th} hour

• $T_{\text{acceptable}}$ – Either the lower (T_{Lower}) or the upper limit (T_{Upper}) of the targeted operative temperature based on IMAC comfort model.

Basis of Eco Niwas Samhita RETV value

Same as Discomfort Degree Hours

Total discomfort degree hours across the year against the comfort definition*

*National Building Code 2016 (India Model for Adaptive Comfort)

DAY 1

Lunch Break

DAY 1

Session 3: Building Physics and Fundamentals of Thermal Comfort




09

Building Physics Affecting Thermal Comfort

Building Physics Affecting Thermal Comfort


Energy & Heat

As chemical and atomic energy are not relevant in the context of buildings, the phrase "internal energy" is limited to perceptible and latent energy.

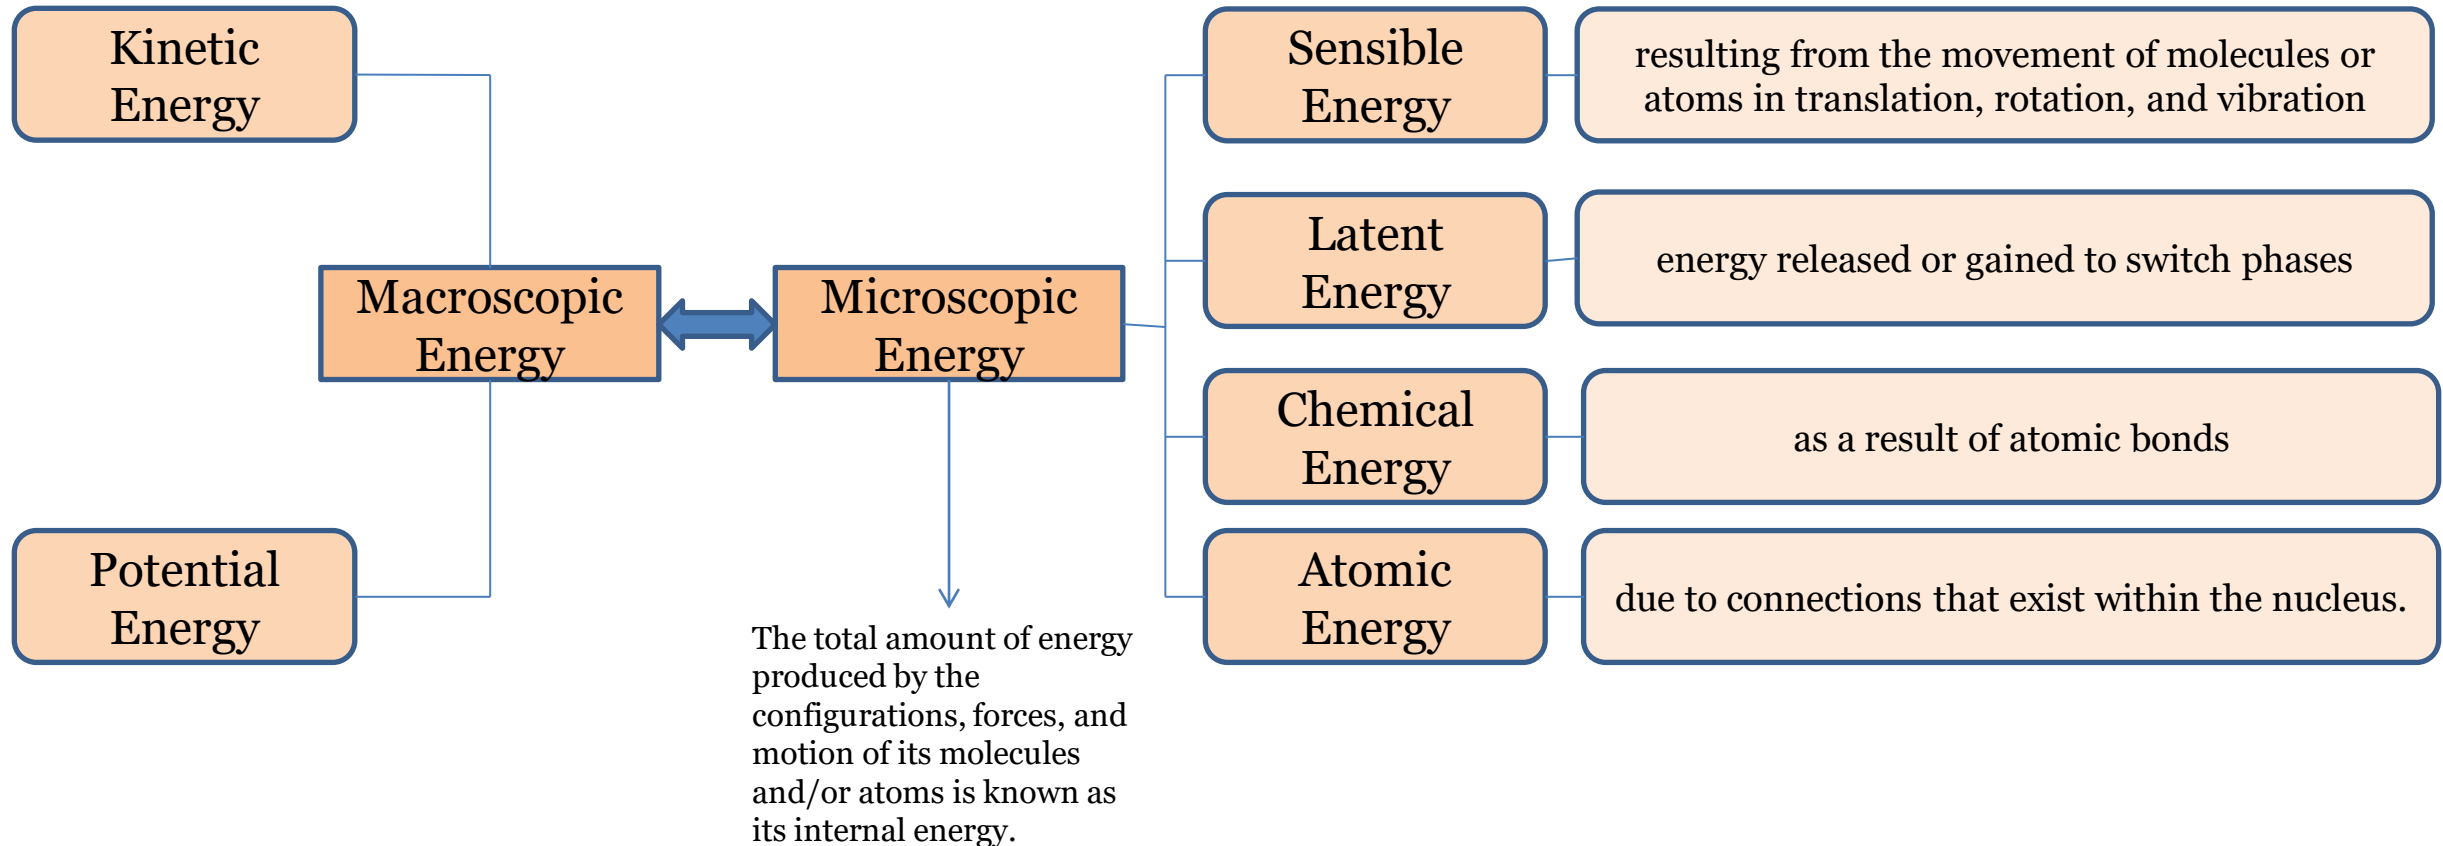

Building Physics Affecting Thermal Comfort

Energy & Heat

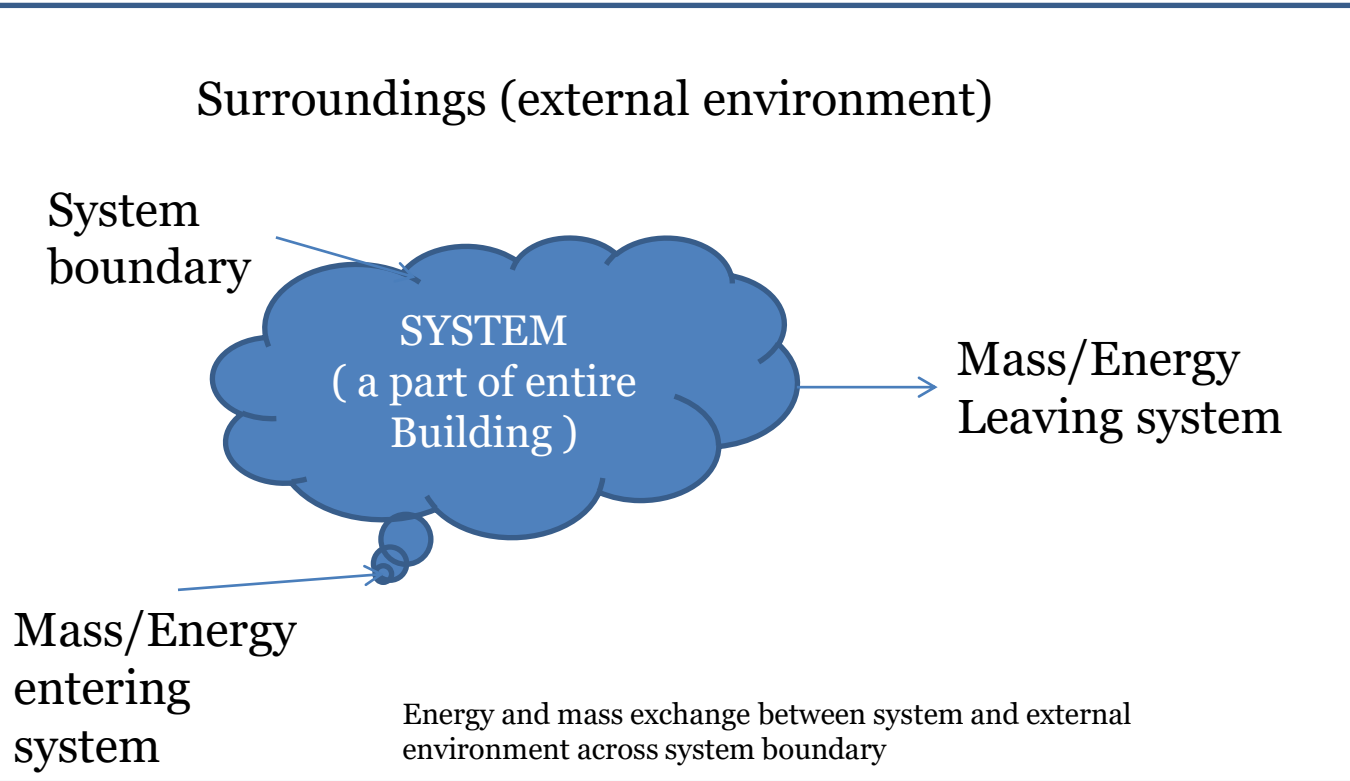


A system, in terms of thermodynamics, is an area that is being studied, such as a room, floor, or building. A system border establishes the region's size, while elements outside of that boundary make up the external environment. As a result, a thermodynamic system is defined as a space-bound area or a volume of matter enclosed by a closed surface (ASHRAE, 2021). Over this system boundary, mass and/or energy are exchanged.

An open system is one that enables both energy and mass exchange with its surroundings, whereas a closed system only permits the exchange of energy and excludes mass. However, it is important to note that in order to distinguish between the system and its surroundings in both systems, a real or hypothetical, fixed or moveable boundary must be established (ASHRAE, 2021) This line may be rigid or flexible.

The envelope is regarded as the boundary when a building is viewed as a system in order to comprehend its thermal interactions with the surrounding environment.

Building Physics Affecting Thermal Comfort

Energy & Heat

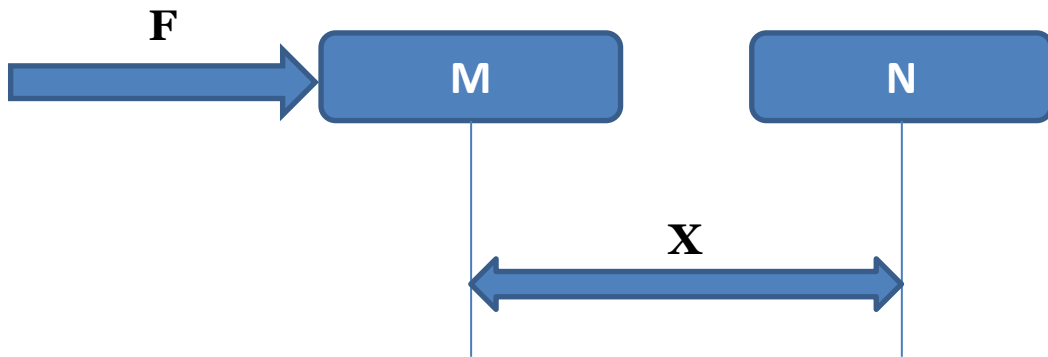

Work 'W' is done when Force 'F' moves a body of mass 'm' over distance 'x'

What is Energy ?


Energy of a system is its potential to do work.

Mechanical work (W) is defined as when a force (F) moves a mass (m) over a distance (x), as shown in Figure. An organism uses its internal energy to change its environment.

Similar to how heat is lost from a system at a higher temperature to a cooler environment, internal energy is also lost.

Thermal energy is caused by the motion of molecules and/ or intermolecular forces (ASHRAE, 2021).


Building Physics Affecting Thermal Comfort

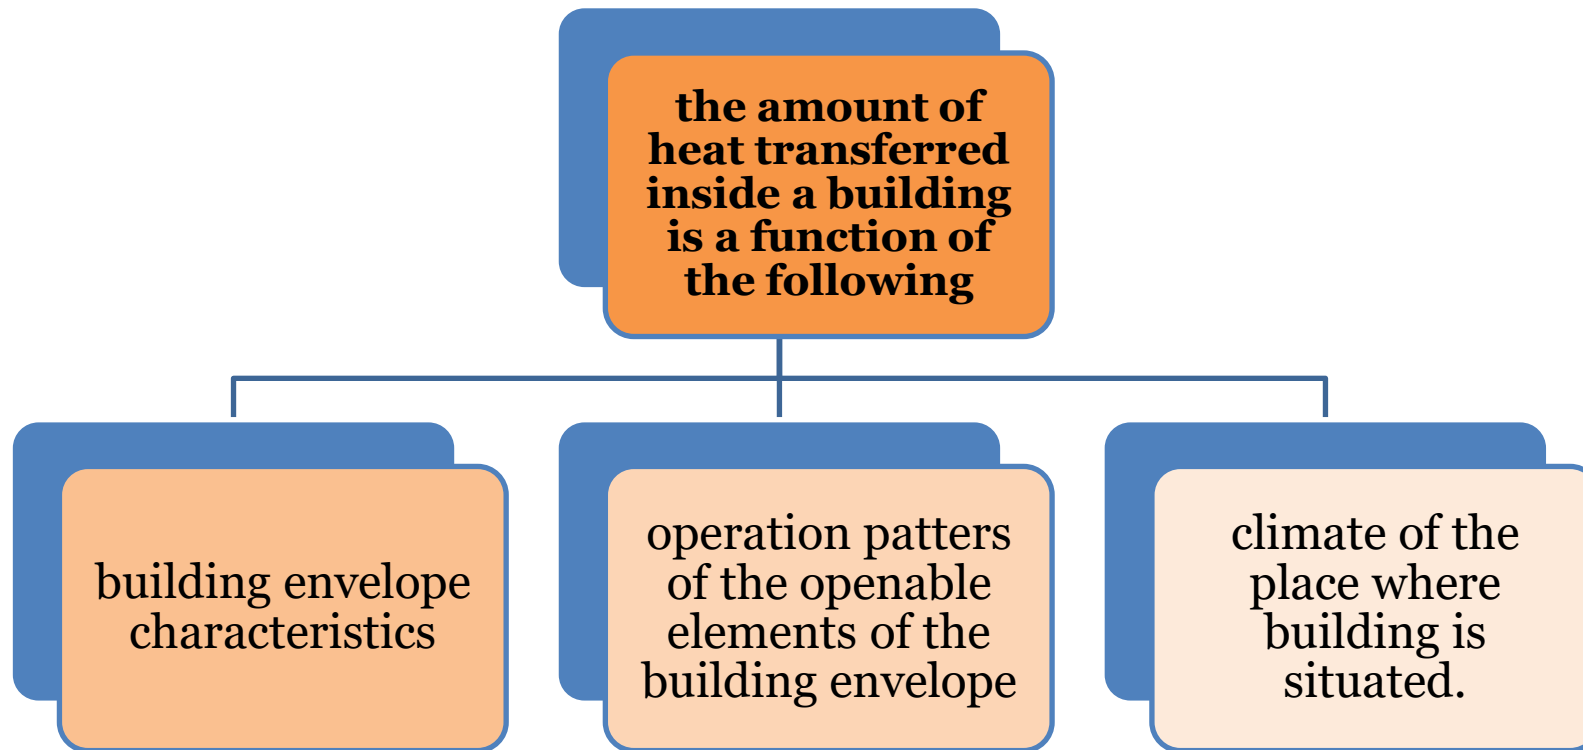

Building Physics Affecting Thermal Comfort


Factors Influencing Heat Transfer

- The amount of thermal energy on the surface of various building elements is visible in thermography images of buildings and people in various built environments.

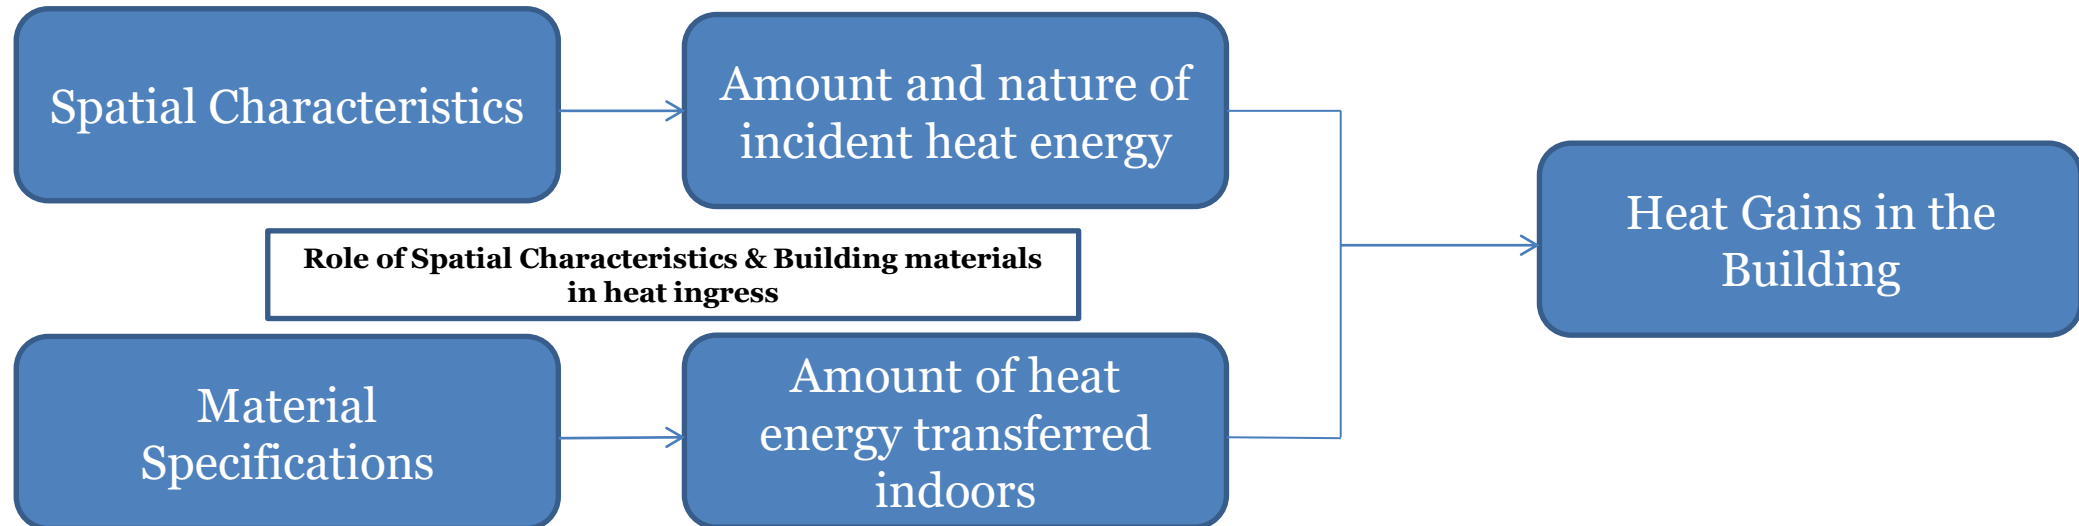

- Figure demonstrates that the distribution of thermal energy among its users and in any indoor or outdoor environment is not uniform. This implies that heat is constantly being transferred between the surfaces of different items, people inside, and the air inside. Building heat transmission occurs at the building envelope, much as how heat transfer between a human body and the air around it occurs at the skin's surface.

Building Physics Affecting Thermal Comfort

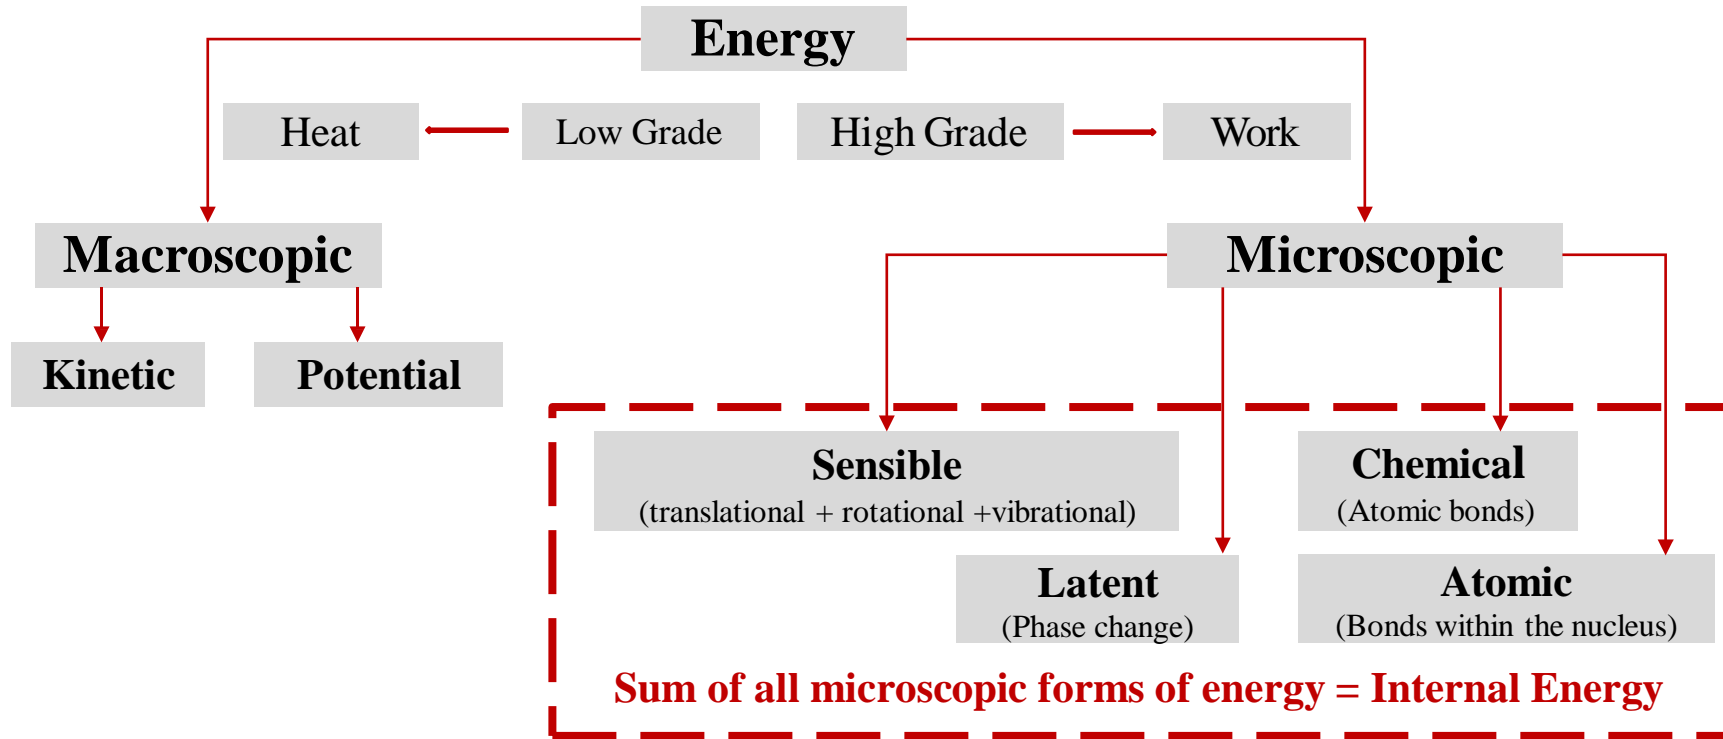

Forms of Energy

Building Physics Affecting Thermal Comfort

1st Law of Thermodynamics

$$\Delta U = Q - W$$

ΔU - change in internal energy

Q - heat added to the system

W - work done by the system


Establishes a relationship between a system's

- Internal energy
- The work performed by (or to) the system, and
- The heat removed from (or added to) the system

The internal energy of a system performing work or losing heat decreases, whereas a system's internal energy rises if it gains heat or is subjected to work.

Building Physics Affecting Thermal Comfort


2nd Law of Thermodynamics

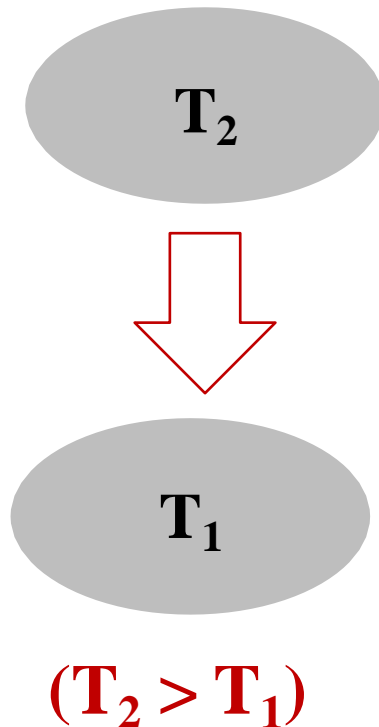


- The natural (spontaneous) direction of heat flow between bodies is from hot to cold.
- Heat moves from higher temperature to lower temperature

Building Physics Affecting Thermal Comfort

Modes of Heat Transfer

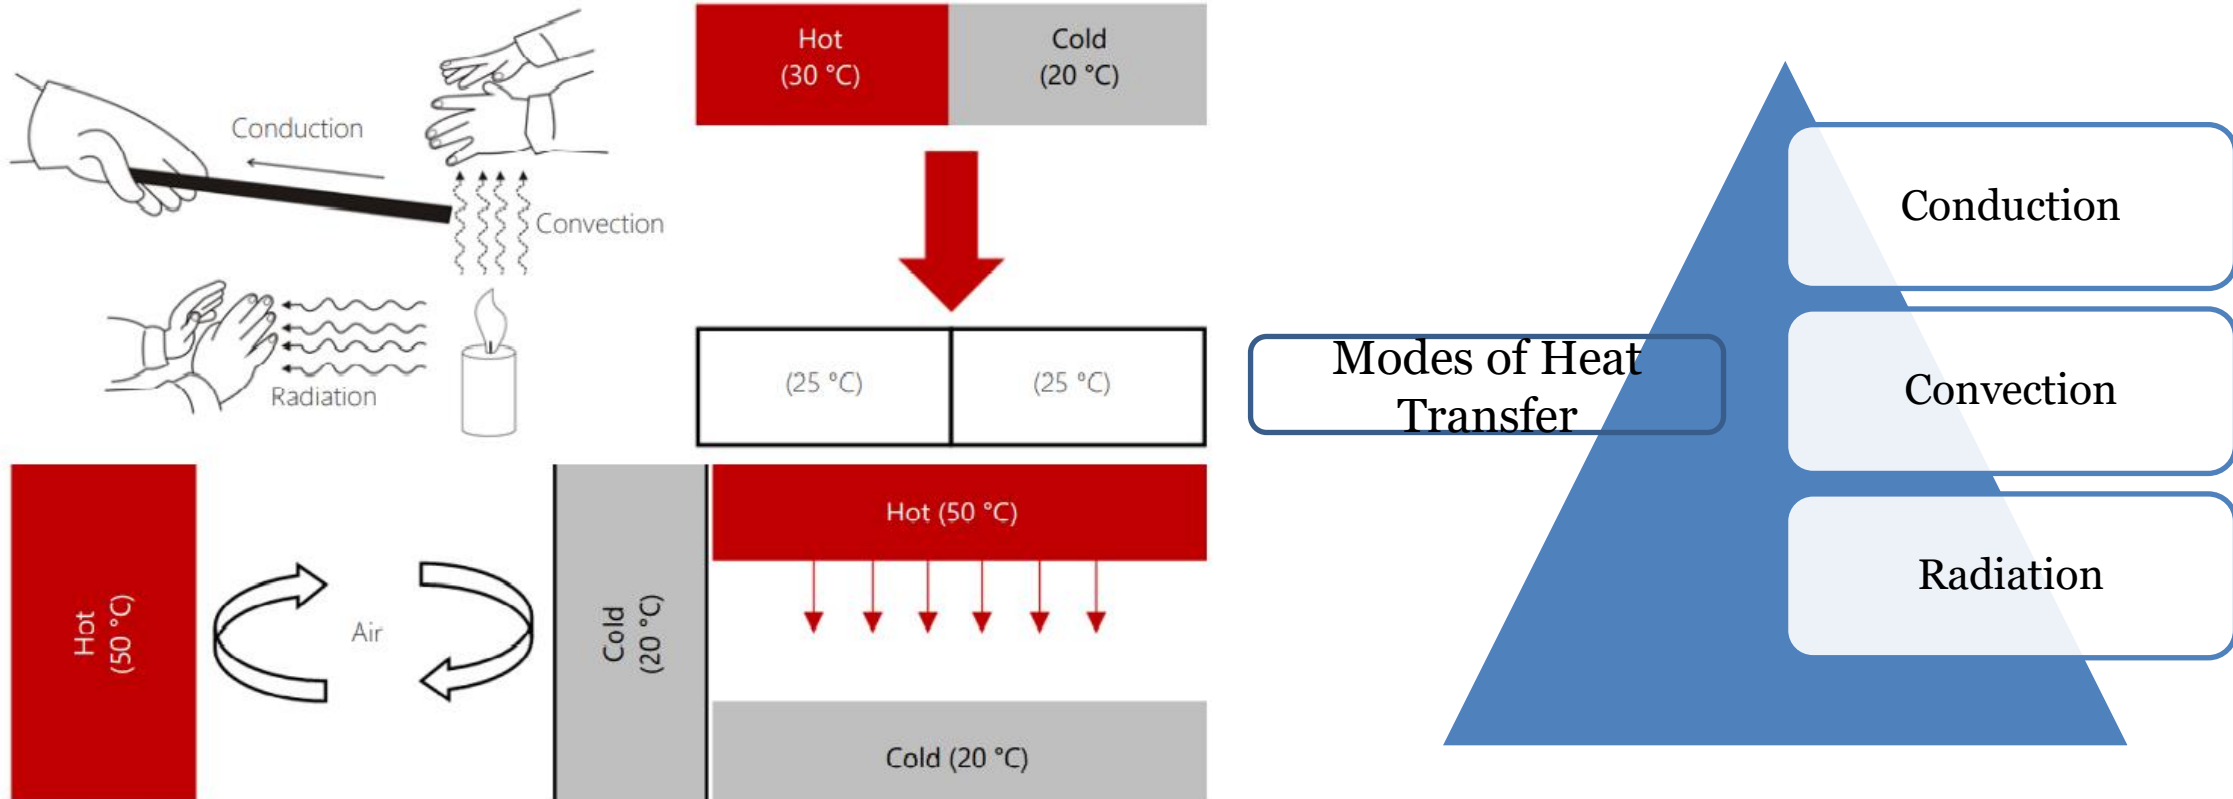

Heat Transfer in Buildings – Conduction Principles

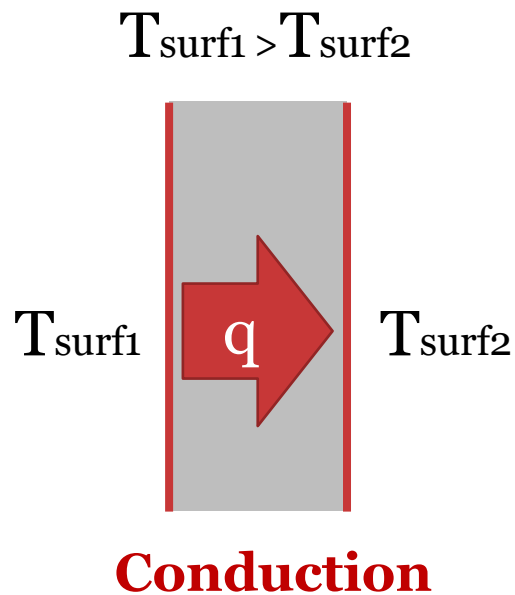

Occurs in a stationary medium


Hot objects with higher energy
(due to intense random molecular motions)

transfer heat to

Cool objects with lesser energy (due to lower molecular motions)

Source: Rawal, R. (2021, December 22). Heat Transfer and Your Building Envelope. Solar Decathlon India. Retrieved April 13, 2022, from <https://solardecathlonindia.in/events/>

Heat Transfer in Buildings – Conduction Principles

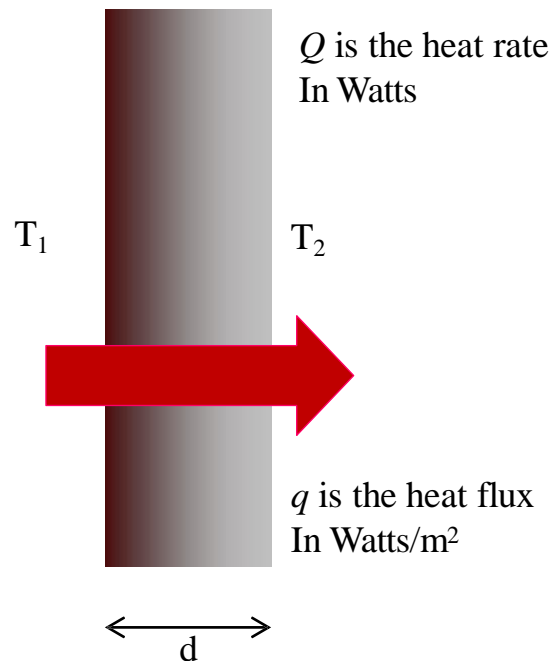


Steady-state **(time-independent)** heat conduction through a layer (thickness d , thermal conductivity k) with surface temperatures T_1 and T_2

$$Q = k A \frac{T_1 - T_2}{d} \text{ (W)}$$

$$q = k \frac{T_1 - T_2}{d}$$

Heat Transfer in Buildings – Conduction Principles

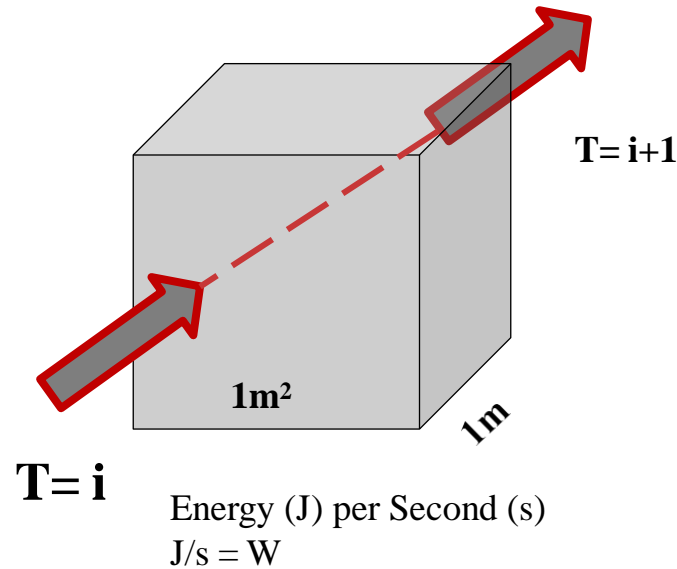

q depends on?

- Temperature difference
- Thickness of the layer (d)
- Thermal conductivity (k) which is a property of the material

Thermal conductivity (k)

- property of the material
- function of moisture and temperature
- $\text{W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$

Heat Transfer in Buildings – Conduction Principles

Energy & Heat

Thermal conductivity, density and specific heat capacity of common building materials and surface finishes

Source: Thermo-Physical-Optical Property Database of Construction Materials, U.S.-India Joint Center for Building Energy Research and Development (CBERD) and Ministry of New and Renewable Energy (MNRE)

MATERIALS	DENSITY (kg/m ³)	THERMAL CONDUCTIVITY (W/m.k)	SPECIFIC HEAT CAPACITY (J/kg.K)
Walls			
Autoclaved Aerated Concrete Block (AAC)	642	0.184	0.794
Resource Efficient Bricks (REB)	1520	0.631	0.9951
Concrete block (25/50)	2427	1.396	0.4751
Concrete block (30/60)	2349	1.411	0.7013
Calcium Silicate Board	1016	0.281	0.8637
Cement Board	1340	0.438	0.8113
Sandstone	2530	3.009	1.5957
Stone (Jaisalmer Yellow)	3006	2.745	2.0954
Stone (Kota)	3102	3.023	2.0732
Bamboo	913	0.196	0.6351

Heat Transfer in Buildings – Conduction Principles


Energy & Heat

**Thermal conductivity,
density and specific heat
capacity of common
building materials and
surface finishes**

*Source: Thermo-Physical-Optical Property
Database of Construction Materials, U.S.-
India Joint Center for Building Energy
Research and Development (CBERD) and
Ministry of New and Renewable Energy
(MNRE)*

MATERIALS	DENSITY (kg/m ³)	THERMAL CONDUCTIVITY (W/m.k)	SPECIFIC HEAT CAPACITY (J/kg.K)
Surface Finishes			
Plaster of Paris (POP) powder	1000	0.135	0.9536
Cement Plaster	278	1.208	0.9719
Plywood	697	0.221	0.7258

Heat Transfer in Buildings – Conduction Principles

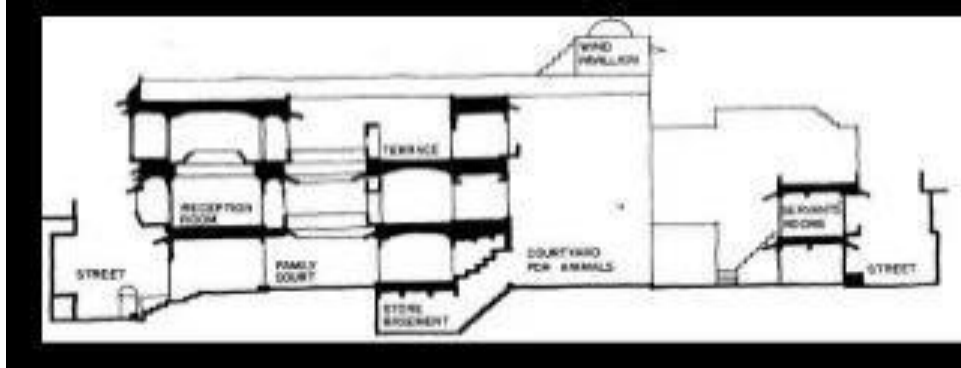


Conduction through walls



Heat Transfer in Buildings – Convection Principles

$$T_{\text{surf}} > T_{\text{fluid}}$$

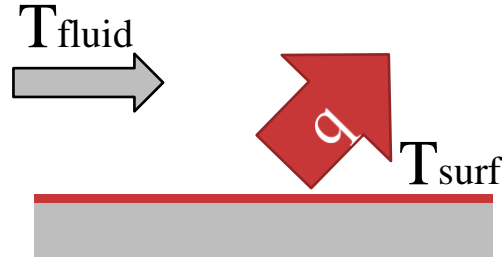


Convection

- Convection heat transfer needs a fluid (gas or liquid) medium and involves bulk fluid motion
- The heated fluid moves away from the source of heat, carrying energy with it causing convection currents that transport energy

Source: Rawal, R. (2021, December 22). Heat Transfer and Your Building Envelope. Solar Decathlon India. Retrieved April 13, 2022, from <https://solardecathlonindia.in/events/>

Heat Transfer in Buildings – Convection Principles

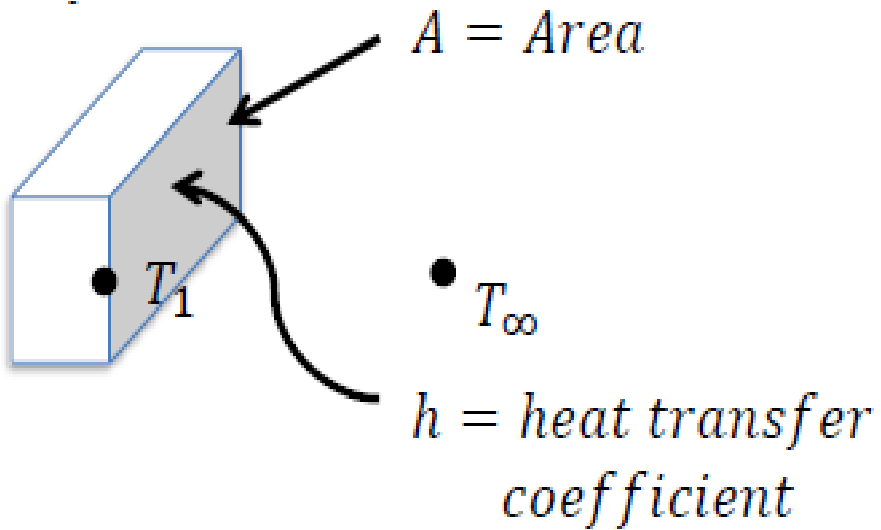

Convective heat transfer (Q) between a fluid and a surface is

Q a temperature difference

Q a area of the surface in contact

$$Q = h A \Delta T$$

Q = heat transfer by convection, W

A = surface area, m²

$\Delta T = T_\infty - T_1$ at some specified location, K

h = heat transfer coefficient, W·m⁻²·K⁻¹

Heat Transfer in Buildings – Convection Principles

Surface resistance (ISO 6946)


Heat flow direction	R_{si} [m ² ·K·W ⁻¹]	R_{so} [m ² ·K·W ⁻¹]
Horizontal (±30°)	0.13	0.04
Up	0.10	0.04
Down	0.17	0.04

Surface conductance

Conductance of the thin film of air at the surface of the material/body

- h = surface/film conductance
- W·m⁻²·K⁻¹
- Surface/film resistance $R_s = 1/h$

Heat Transfer in Buildings – Convection Principles

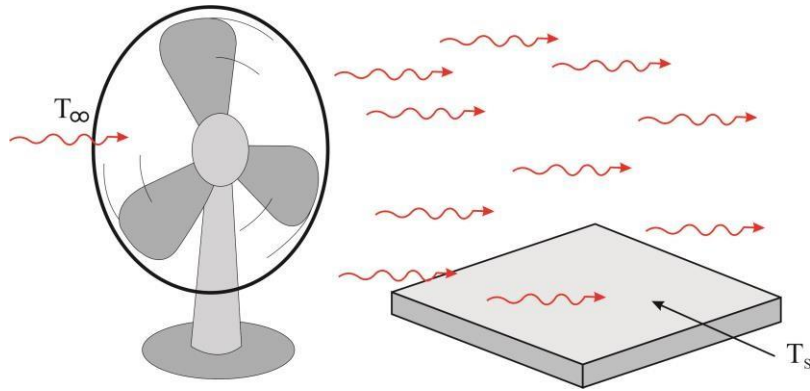

Heat transfer coefficient

Surface conductance = Surface film conductance =
Equivalent conductance =
Heat transfer coefficient = h

$$h = h_c + h_r$$

h_c = convective heat transfer coefficient


h_r = radiative heat transfer coefficient

Natural Convection – Forced Convection




Source: Cappuccino. (n.d.). freepik. Retrieved from <https://www.freepik.com/photos/cappuccino>, Indiamart. (n.d.). Usha Table Fan. Indiamart. Retrieved from <https://www.indiamart.com/proddetail/usha-table-fan-19384320588.html>

Heat Transfer in Buildings – Convection Principles

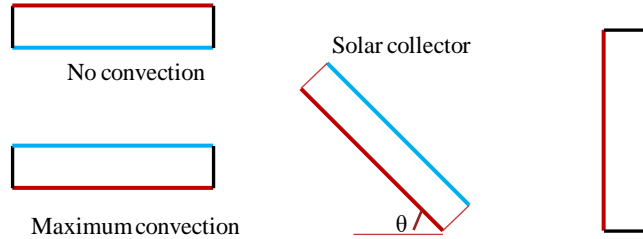

Convective heat transfer is a function of angle (θ)

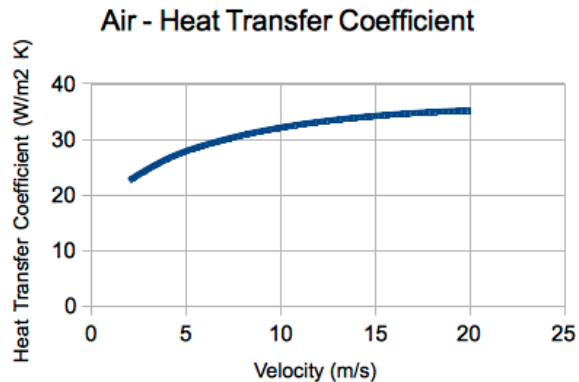

- Surface film resistance or conductance considers both radiative and convective heat transfer
- Varies with
 - Orientation of the surface
 - Surface emittance
 - Direction of heat flow
 - Air velocity
 - Surface and air temperature, and the temperature difference

Heat Transfer in Buildings – Convection Principles

Airflow through a room


Wall temperatures of the room at 30 °C

Heat transfer coefficient on inside = 10 W/m²K

Wind-induced airflow


Stack effect

Buoyancy driven wind flow

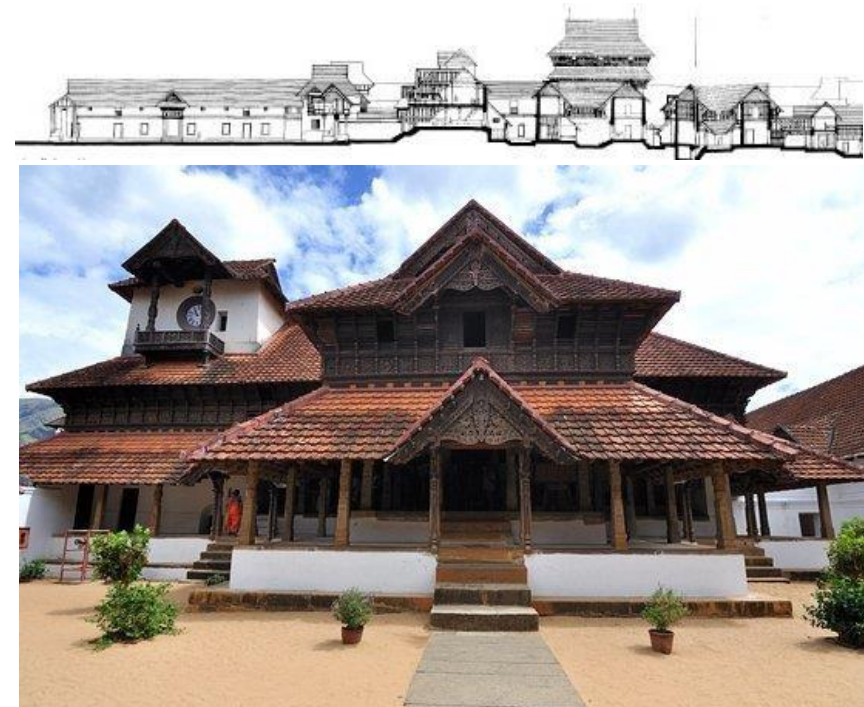

Source: *Tripadvisor. (n.d.). Padmanabhapuram Palace. Tripadvisor. Retrieved from https://www.tripadvisor.in/Attraction_Review-g608476-d3705659-Reviews-Padmanabhapuram_Palace_Kanyakumari_Kanyakumari_District_Tamil_Nadu.html*

Heat Transfer in Buildings – Radiation Principles

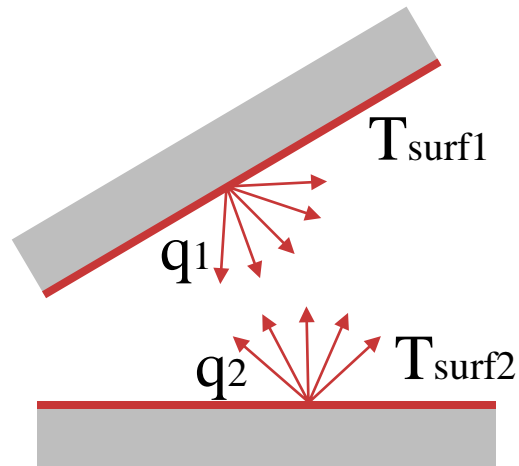

Radiation


- Radiation heat transfer is a process where heatwaves are emitted that may be absorbed, reflected, or transmitted through a colder body.
- Energy has an electric field and a magnetic field associated with it,
- Wave-like properties. “electromagnetic waves”
- Wide range of electromagnetic radiation in nature. Visible light is one example.
- Others include forms like ultraviolet radiation, x-rays, and gamma rays.

Source: Rawal, R. (2021, December 22). Heat Transfer and Your Building Envelope. Solar Decathlon India. Retrieved April 13, 2022, from <https://solardecathlonindia.in/events/>

Heat Transfer in Buildings – Radiation Principles

The behaviour of a surface with radiation incident upon it can be described by the following quantities:

- = absorptance – a fraction of incident radiation absorbed
- = reflectance - fraction of incident radiation reflected
- = transmittance – a fraction of incident radiation transmitted.

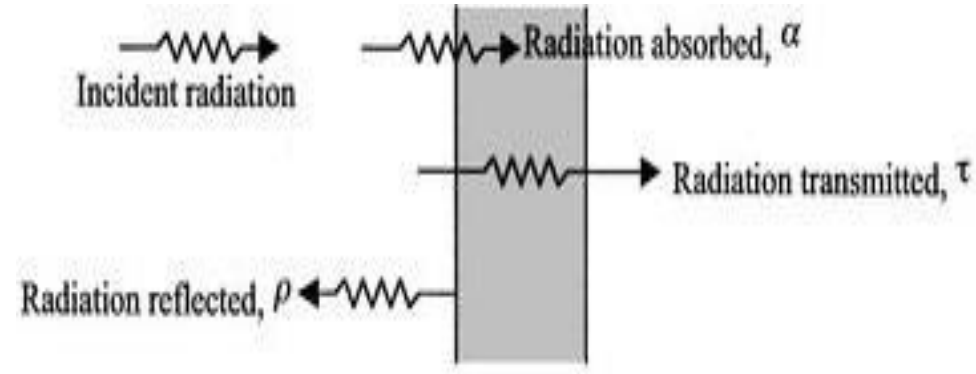

$$\alpha + \rho + \tau = 1$$

Outdoor Climate & Heat Transfers - Climate Zones of India

	Conduction		Convection		Radiation	
	Spatial	Material & Methods	Spatial	Material & Methods	Spatial	Material & Methods
Walls		V. High				Low
Fenestrations (Windows)	High	V. High	High		V. High	V. High
Roofs	Low	High	V. Low	V. Low	High	V. High

V. Low

Low

Neutral

High






V. High

Source: Rawal, R. (2021, December 22). Heat Transfer and Your Building Envelope. Solar Decathlon India. Retrieved April 13, 2022, from <https://solardecathlonindia.in/events/>

Heat Transfer in Buildings – Design Strategy

	Conduction	Convection	Radiation
Geometry - Massing	HD	WH	All Climates
Orientation		WH	All Climates
External Surface to Building Volume Ratio	HD	WH	HD
Extent of Fenestration and Thermal Characteristics	HD	WH	All Climates
Internal Volume – Stack Ventilation	X	HD	X
Location of Fenestration – Pressure Driven Ventilation	X	WH	X

WH: Warm Humid
HD: Hot-Dry
TE: Temperate CM:
Composite CO:
Cold

 V. Low
 Low
 Neutral
 High
 V. High

Source: Rawal, R. (2021, December 22). Heat Transfer and Your Building Envelope. Solar Decathlon India. Retrieved April 13, 2022, from <https://solardecathlonindia.in/events/>

Heat Transfer in Buildings – Design Strategy

Thermal Conductivity

R Value – U Value

Thermal Mass

Specific Heat

Thermal Diffusivity

- **Walls**

- Internal
- External

Thermal Conductivity – Frames and Glass

R Value – U Value

Solar Gains

Solar Heat Gain Coefficient

Visual Light Transmittance

VLT

- **Fenestrations**

- Windows
- Skylights
- Doors

Thermal Conductivity

R Value – U Value

Thermal Emissivity

Solar Reflectance

- **Roofs**

- Floors
- Foundations

Source: Rawal, R. (2021, December 22). Heat Transfer and Your Building Envelope. Solar Decathlon India. Retrieved April 13, 2022, from <https://solardecathlonindia.in/events/>



10

Heat Balance & Adaptive Thermal Comfort Method

Comfort Theory - Heat Balance Method

The heat balance method presents a physics based mathematical model that establishes thermal comfort when heat loss from the body is exactly equal to heat produced within the body. The heat balance method gives following equation:

$$M - W = q_{sk} + q_{res} + S = (C + R + E_{sk}) + (C_{res} + E_{res}) + (S_{sk} + S_{cr})$$

Where,

M = Rate of metabolic heat production, W/m²

W = Rate of mechanical work accomplished, W/m²

q_{sk} = Total rate of heat loss from skin, W/m²

q_{res} = Total rate of heat loss through respiration, W/m²

C + R = Sensible heat loss from skin, W/m²

E_{sk} = Total rate of evaporative heat loss from skin, W/m²


C_{res} = Rate of convective heat loss from respiration, W/m²

E_{res} = Rate of evaporative heat loss from respiration, W/m²

S_{sk} = Rate of heat storage in skin compartment, W/m²

S_{cr} = Rate of heat storage in core compartment, W/m²

Comfort Theory - Heat Balance Method

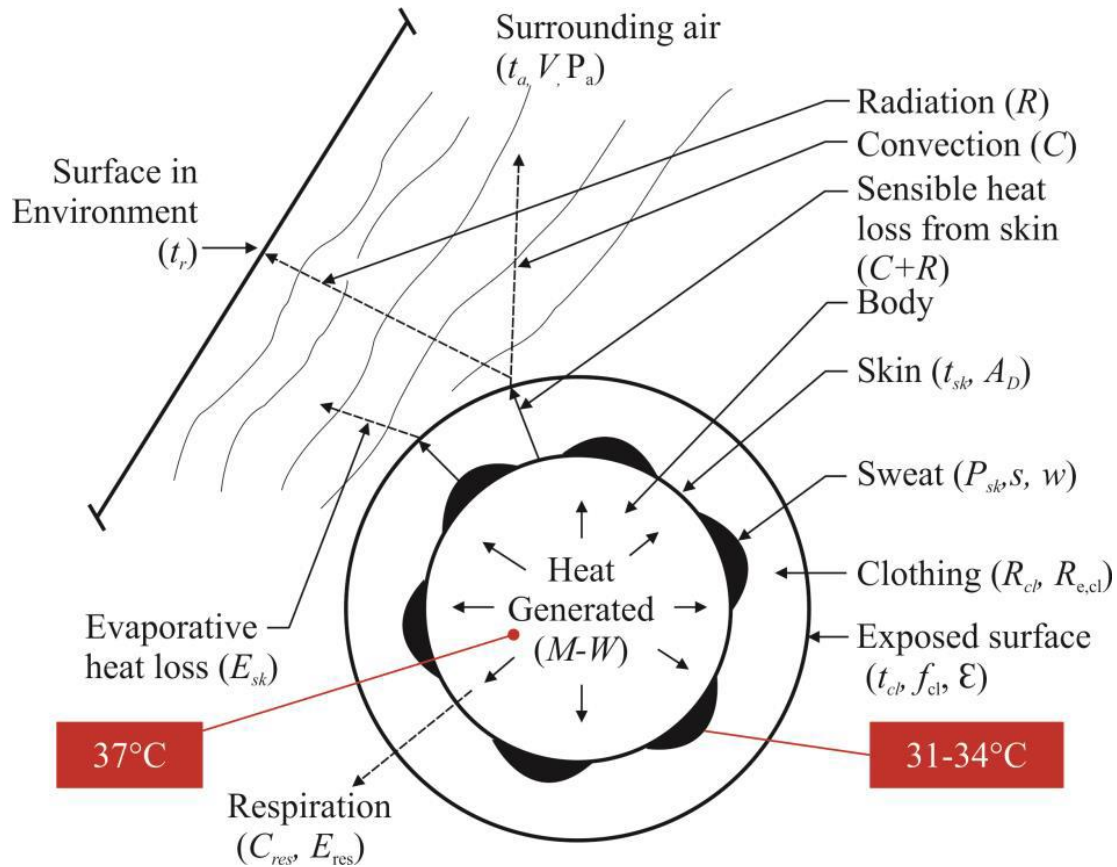

In order to be comfortable: -


Heat production = Heat loss from the body

Heat loss > Production, then you feel Cold

Heat loss < Production, then you feel Hot

Source: Fantozzi, F., & Lamberti, G. (2019). Determination of thermal comfort in indoor sport facilities located in Moderate Environments: An overview. *Atmosphere*, 10(12), 769. <https://doi.org/10.3390/atmos10120769>

Comfort Theory – Adaptive Thermal Comfort Method

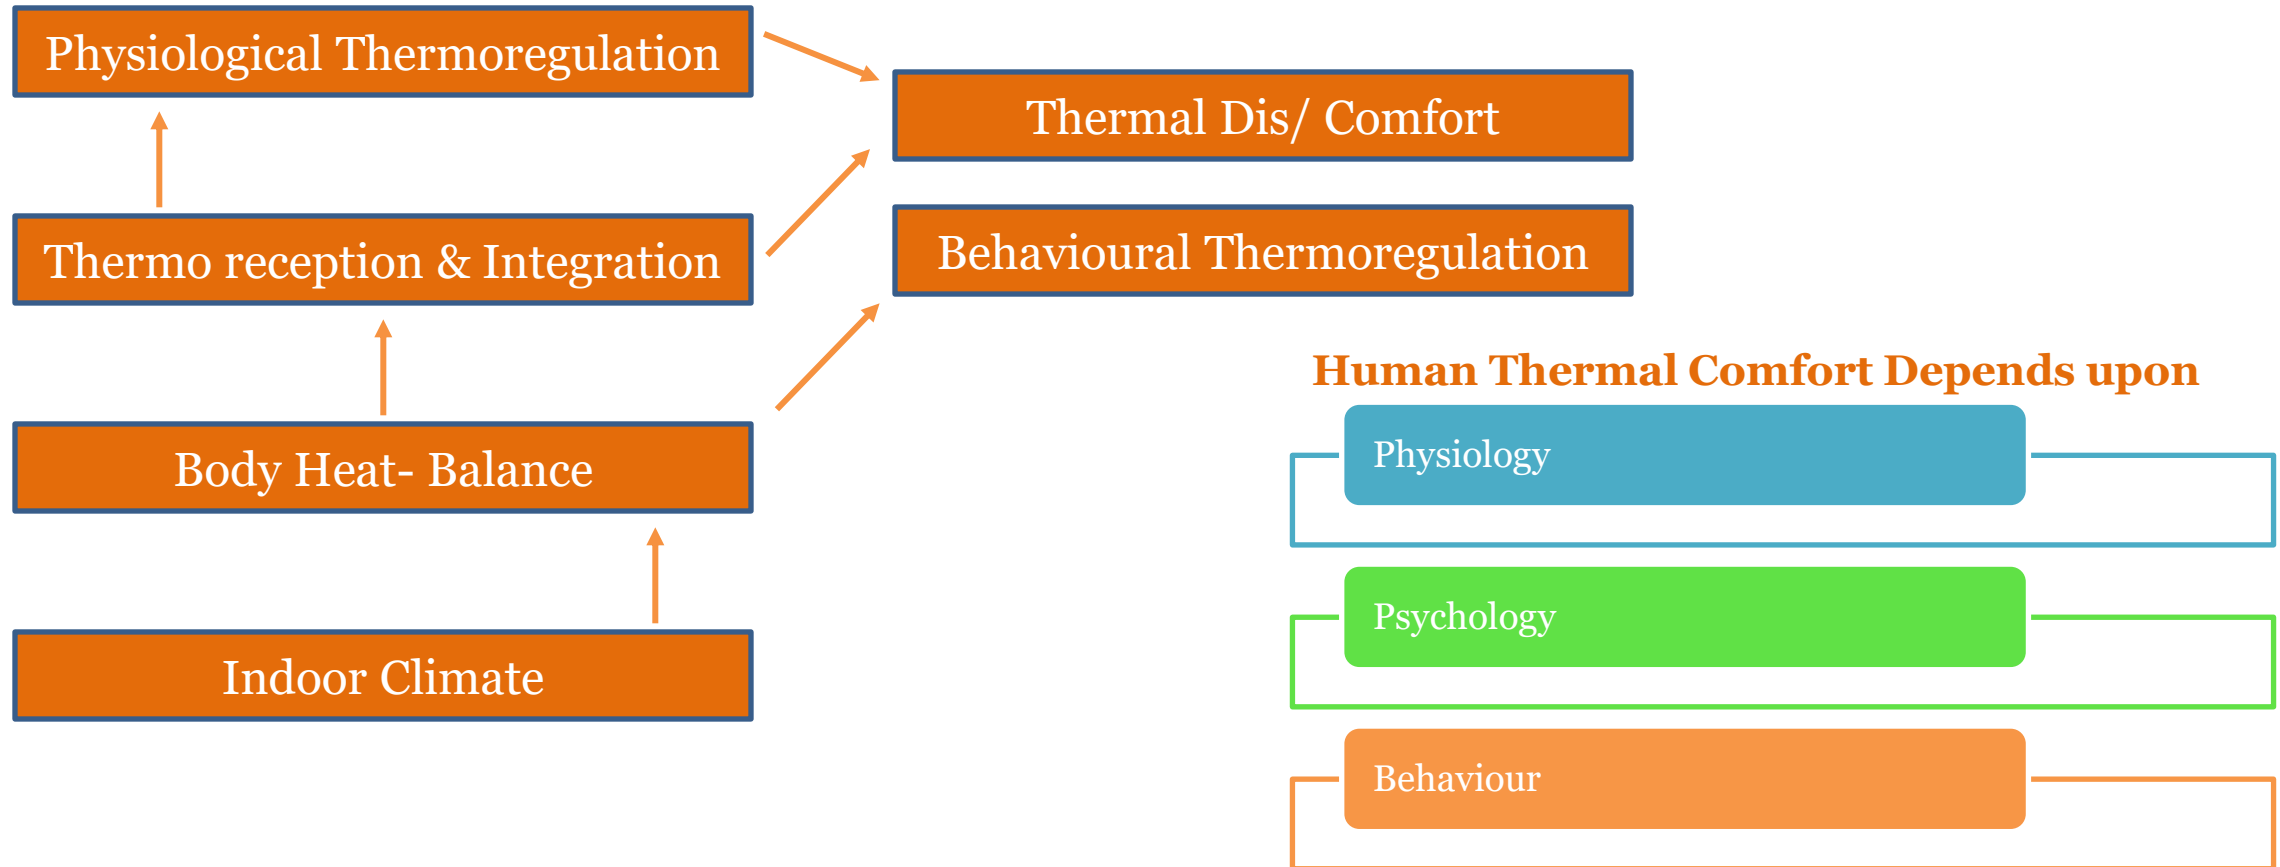

Source: Fantozzi, F., & Lamberti, G. (2019). Determination of thermal comfort in indoor sport facilities located in Moderate Environments: An overview. *Atmosphere*, 10(12), 769. <https://doi.org/10.3390/atmos10120769>




11

Local Thermal Discomfort

Human Comfort Range as per ASHRAE 55 Standard

To accommodate Local thermal Discomfort, most standards like ASHRAE specify conditions to ensure 80% acceptability of the thermal environment amongst occupants.

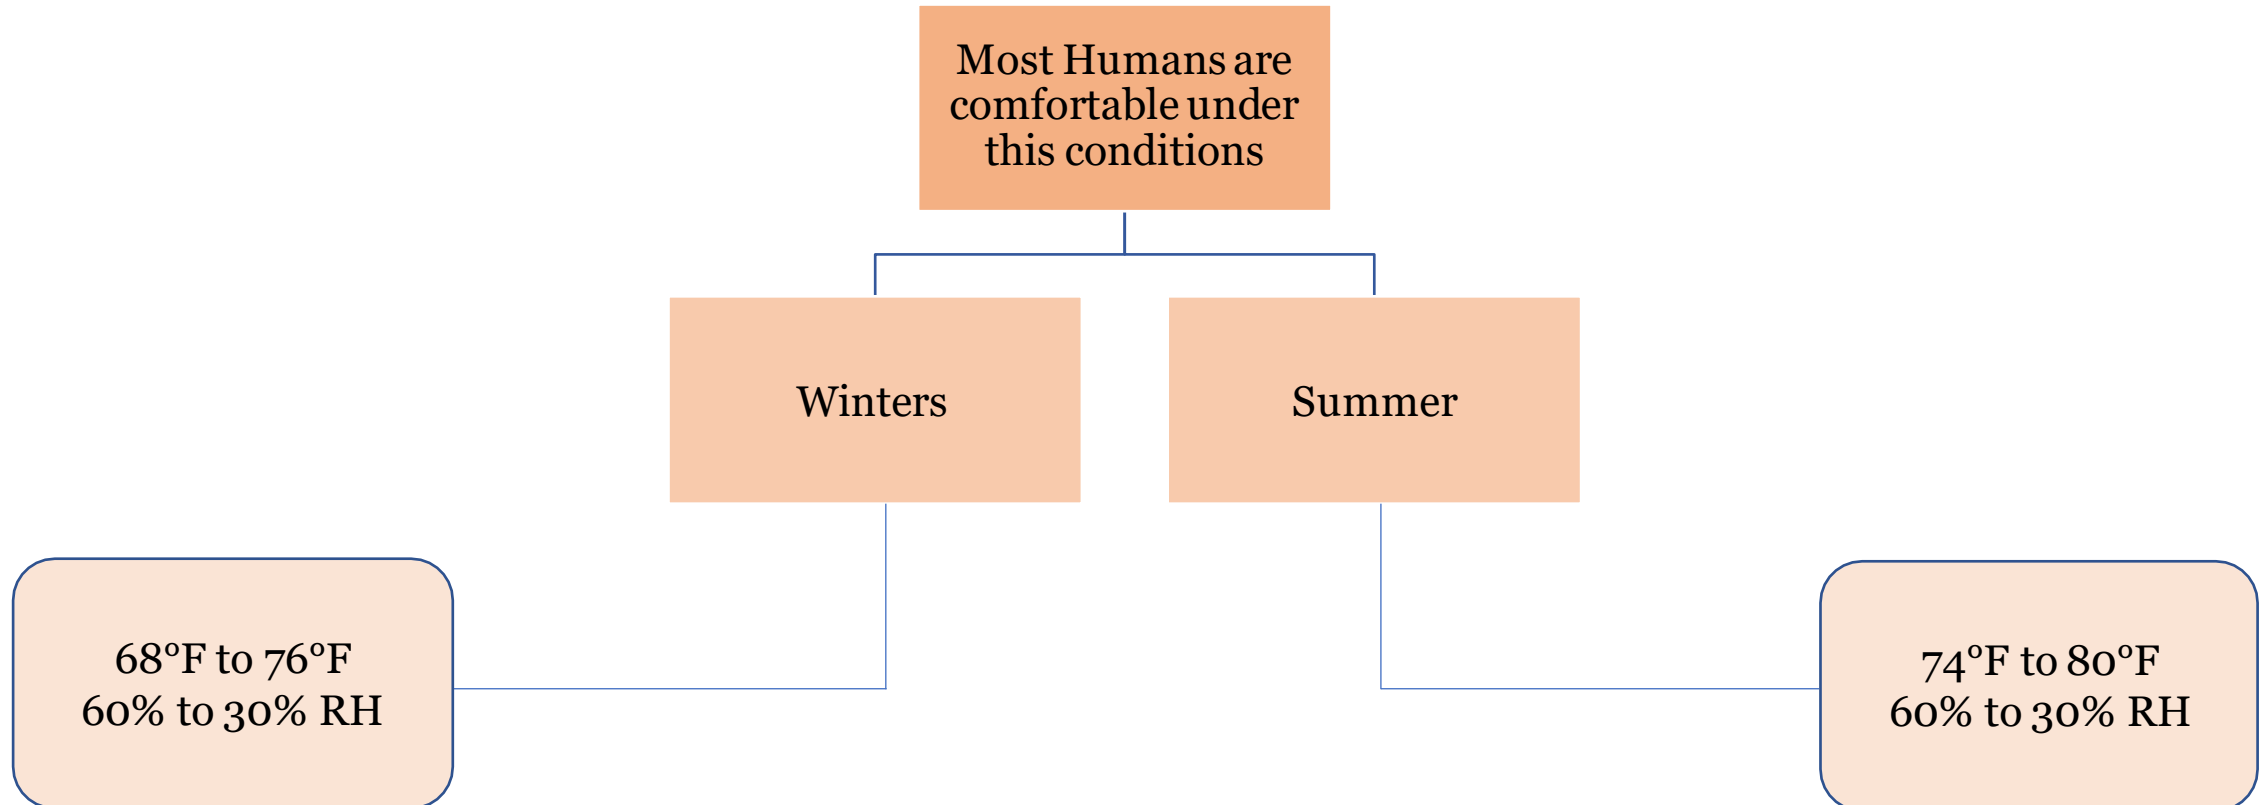

THERMAL ENVIRONMENTS CAN BE DIVIDED LOOSELY INTO THREE BROAD CATEGORIES:

THERMAL COMFORT

Broad satisfaction with the Thermal Environment i.e. most people are neither too hot nor too cold.

THERMAL COMFORT

People start to feel uncomfortable i.e. they are too hot or too cold, but are not made unwell by the conditions.

THERMAL COMFORT

Heat stress or cold stress, is where the thermal environment will cause clearly defined harmful medical conditions, such as dehydration or frost bite

THERMAL DISCOMFORT

Local Thermal Discomfort can be induced



by a generalized warm or cool discomfort of the body



by an unpleasant chilling or heating of a specific region of the body.

To accommodate Local thermal Discomfort, most standards like ASHRAE specify conditions to ensure 80% acceptability of the thermal environment amongst occupants.

Local Thermal Discomfort - Causes

Local Thermal Discomfort is primarily caused by the Asymmetric Thermal Radiation. Where :

Radiant asymmetry is defined as the difference in radiant temperature of the environment on opposite sides of the person/ Difference in radiant temperatures seen by a small flat element looking in opposite directions
(ASHRAE, 2021)


Radiant Asymmetry Types in Buildings

Radiant Temperature Asymmetry – Walls and Roof

Radiant Temperature Asymmetry – Floors

Radiant Temperature Asymmetry Between head and ankles

Local Thermal Discomfort due to Radiant Temperature Asymmetry – Walls and Roof

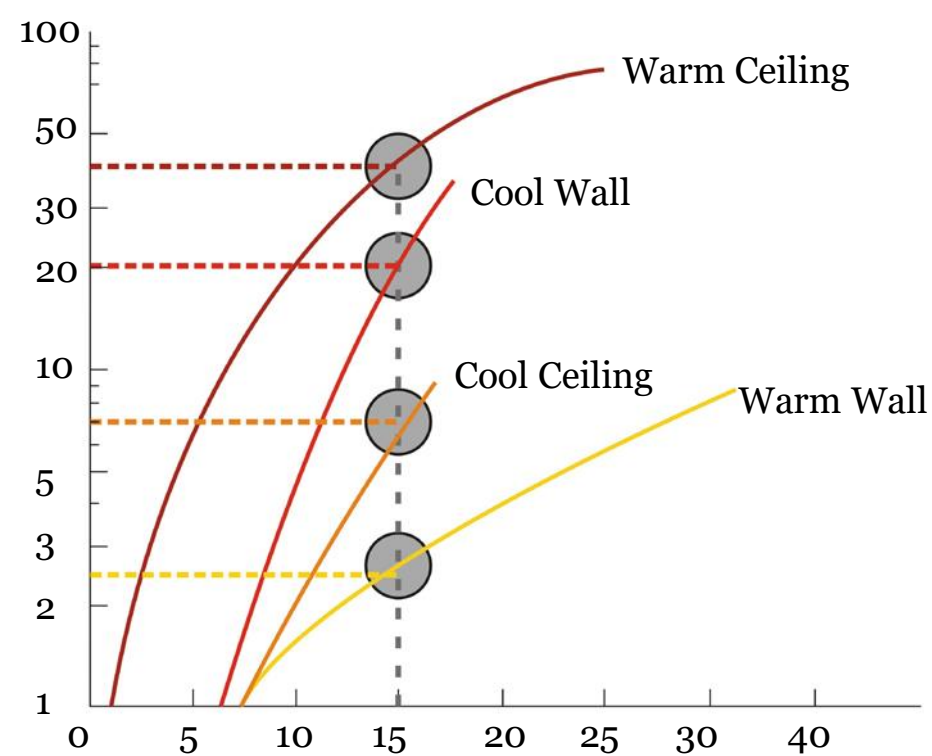

Occupant dissatisfaction levels due to radiant temperature asymmetry in walls and roof.

Source: Abushakra Bass, Akers Larry, Baxter Van, Hayte Sheila & Paranjpey Ramesh (2017). ASHRAE Fundamentals SI edition.


Percentage of dissatisfied occupants with radiant thermal asymmetry of 15°C

Radiant Thermal Asymmetry (15 C) Cause	Warm Ceiling	Cool Walls	Cool Ceiling	Warm Walls
PPD	40%	20%	8%	2.5%

The descending order of PPD expressed in radiant thermal asymmetry for walls and ceilings can be given as


Warm Ceiling > Cool Wall > Cool Ceiling > Warm Wall.

Local Thermal Discomfort due to Radiant Temperature Asymmetry – Walls and Roof

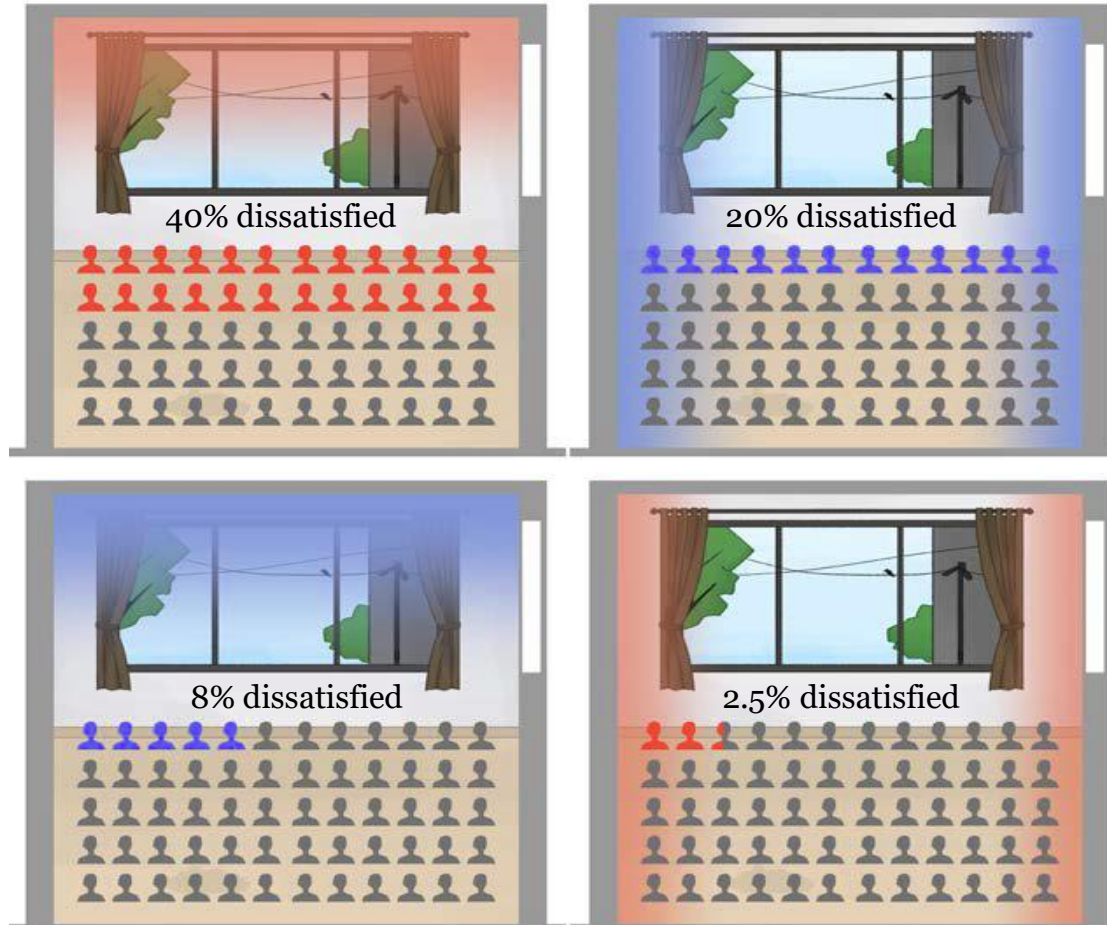

- Representation of radiant thermal asymmetry in walls and roof with resultant percentages of dissatisfied occupants.

Local Thermal Discomfort due to Radiant Temperature Asymmetry – Floors

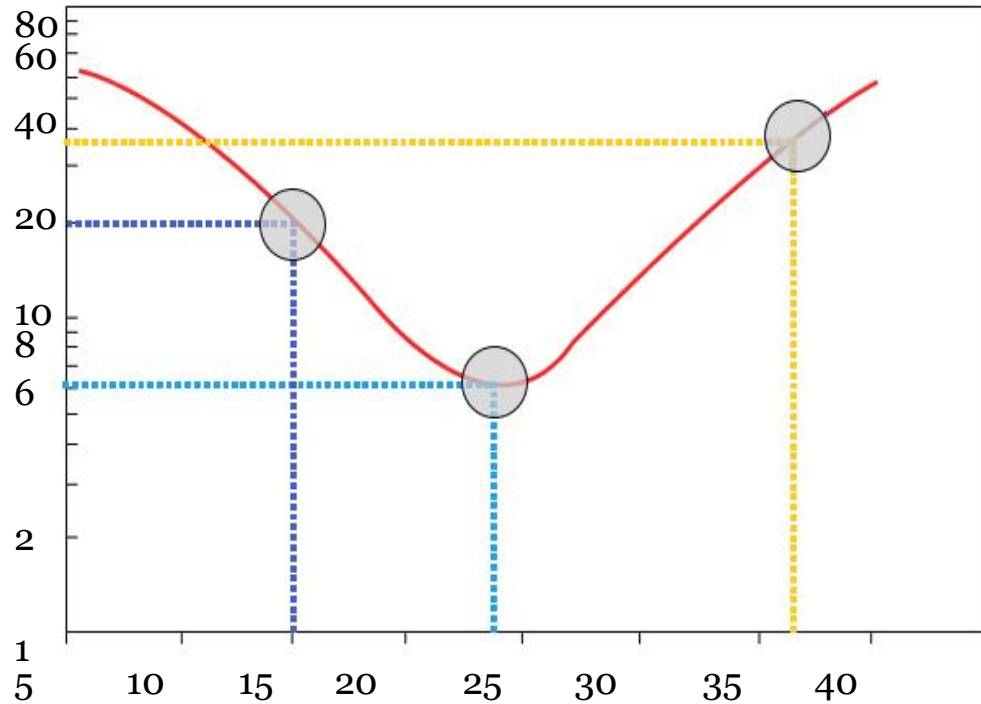

Occupant dissatisfaction levels due to radiant temperature asymmetry in floor.

Source: Abushakra Bass, Akers Larry, Baxter Van, Hayte Sheila & Paranjpey Ramesh (2017).
ASHRAE Fundamentals SI edition..


Percentage of dissatisfied occupants with radiant thermal asymmetry of 15°C

Categorization of Floor Temp.	Cold	Cool/ Neutral	Warm
Floor Temperature	15 °C	24 °C	36 °C
PPD	20%	6%	35%

The descending order of PPD expressed due to floor temperature is Warm Floor > Cold Floor > Cool Floor. An explanation of why cooler or neutral floor temperatures are preferred over warm floors lies in the understanding of

- ❑ the amount of hot and cold receptors present at the base of our feet
- ❑ The sensitivity level of these receptors towards heat or coolth.

Local Thermal Discomfort due to Radiant Temperature Asymmetry – Head and Ankles

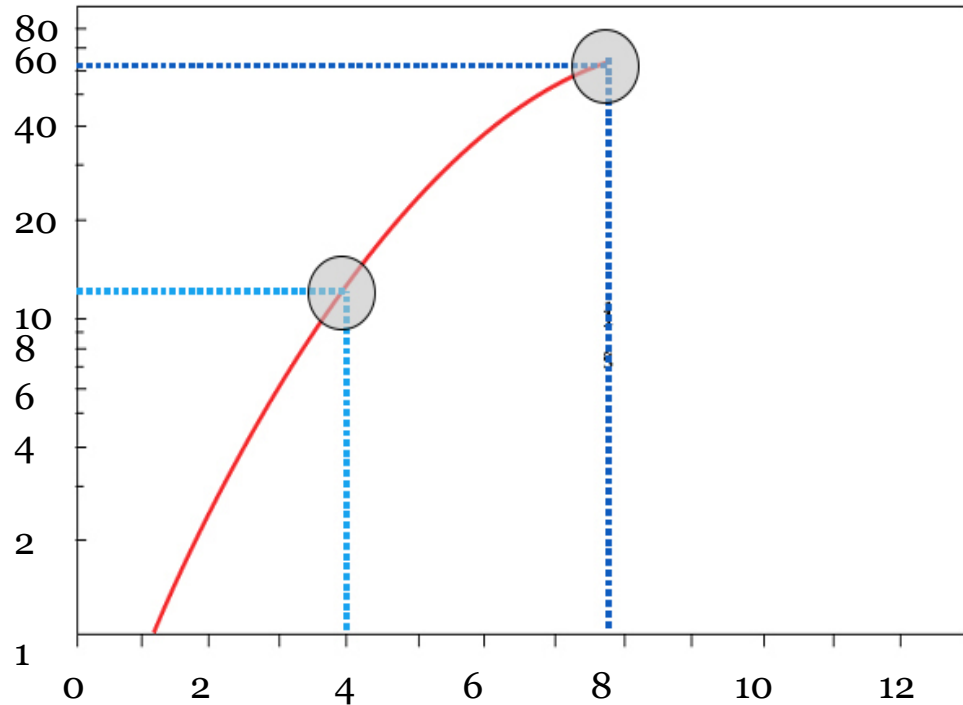

Air Temp Difference between head and Ankles °C

Percentage of Seated People Dissatisfied as Function of Air Temperature Difference Between Head and Ankles

Source: Abushakra Bass, Akers Larry, Baxter Van, Hayte Sheila & Paranjpey Ramesh (2017). ASHRAE Fundamentals SI edition.

Percentage of dissatisfied occupants with radiant thermal asymmetry of 15°C

Categorization of Floor Temp.	Cold	Cool/ Neutral	Warm
Floor Temperature	15 °C	24 °C	36 °C
PPD	20%	6%	35%

The descending order of PPD expressed due to floor temperature is Warm Floor > Cold Floor > Cool Floor. An explanation of why cooler or neutral floor temperatures are preferred over warm floors lies in the understanding of

- ❑ the amount of hot and cold receptors present at the base of our feet
- ❑ The sensitivity level of these receptors towards heat or coolth.

Session 4: Passive Strategies & Building Materials



12

Affordable Housing & Passive Design Strategies

Passive Strategies & Building Physics

Passive Measures

Climatic Zone Level

Temperature, rainfall, wind direction, sun radiation, humidity, and other environmental factors are taken into consideration when designing.

Site Level

To take advantage of the positive aspects of the site and its microclimatic features while minimising the negative aspects.

Level of Response


Block Level

Interaction of the block with its surroundings and plants to ensure that it has adequate heating, ventilation, and lighting.

Unit Level

Design solutions that influence heat, light, and ventilation based on climatic variables at the unit level.

Passive Strategies & Building Physics

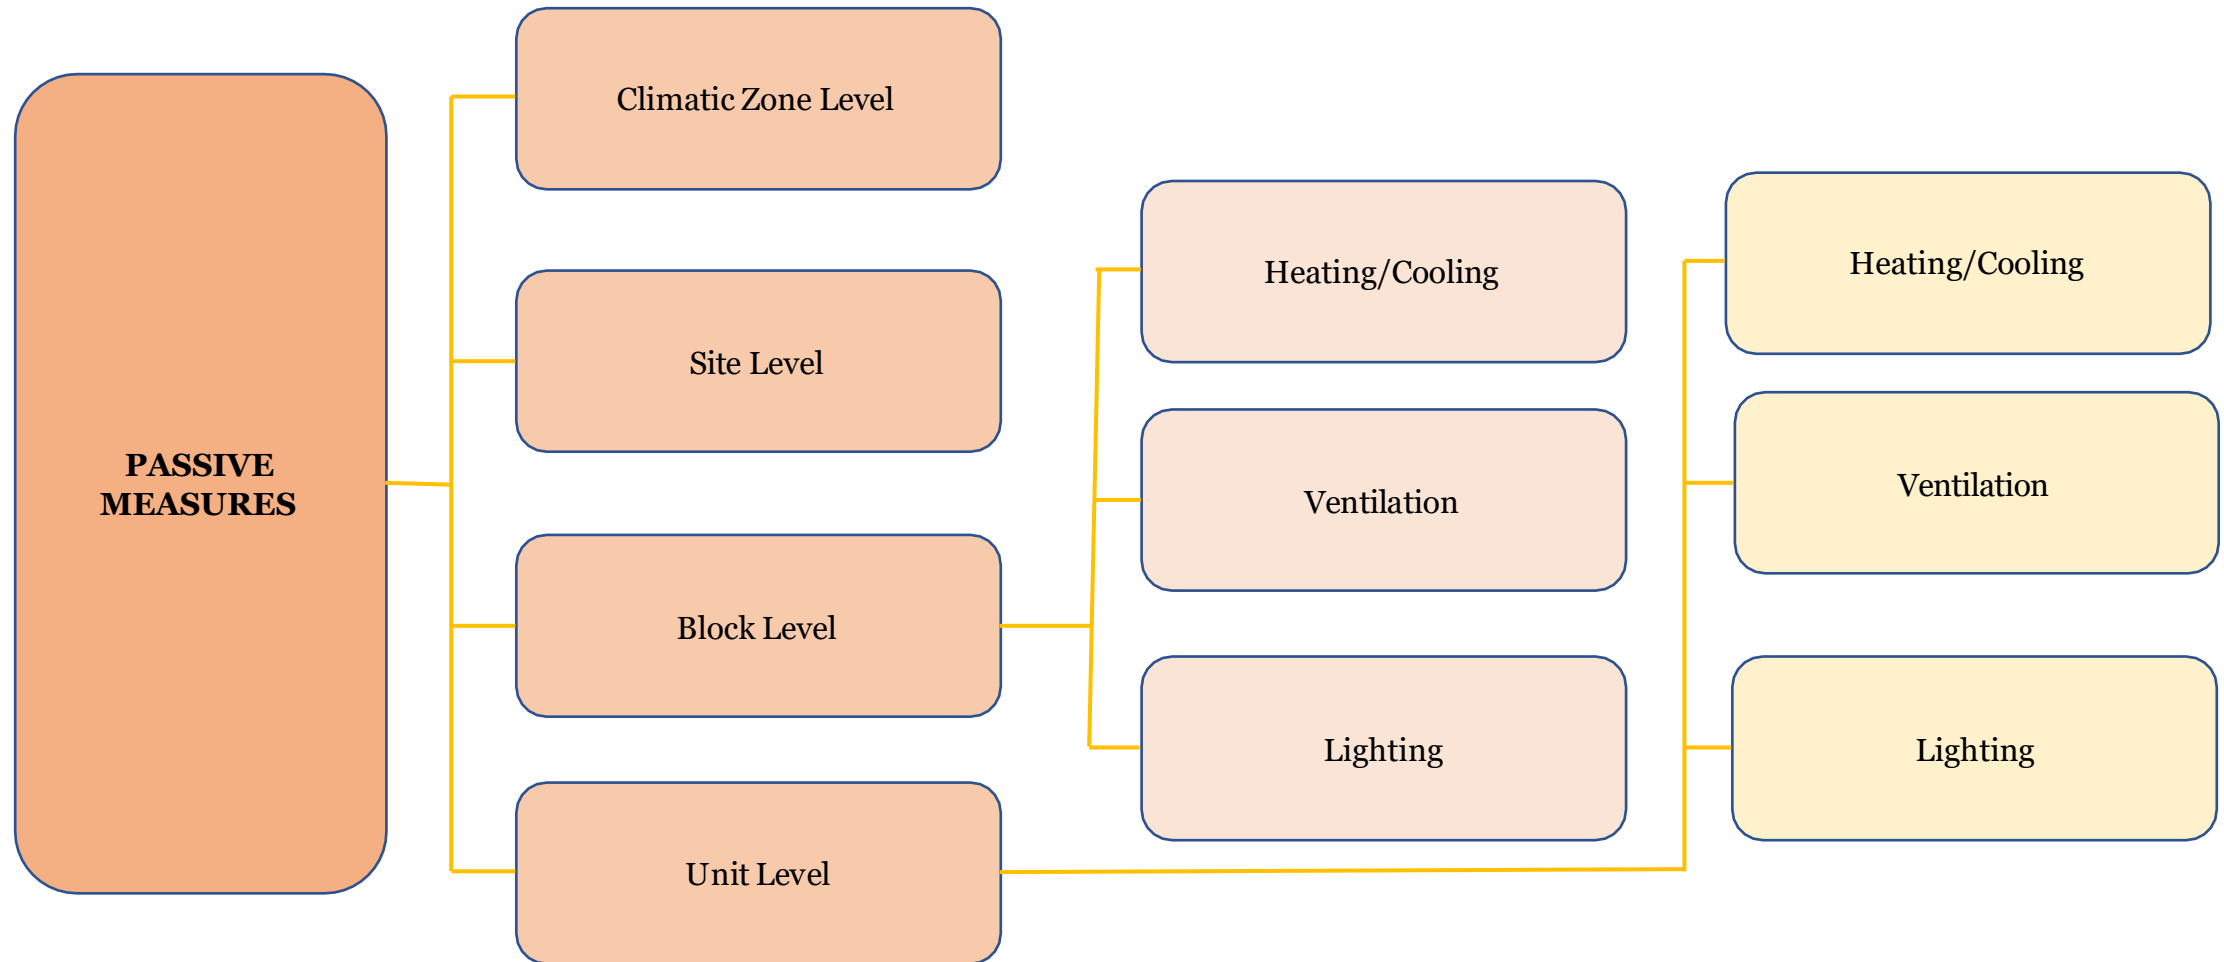



Passive Strategies & Building Physics

Passive Measures – Climatic Zone Level

Vernacular / traditional architectural typologies that respond to the region's distinct environment are best exemplified.

Example

- In Ladakh, earth architecture with thick walls and limited windows provides optimal insulation.
- In Rajasthan, courtyard havelis take advantage of pressure differences and reciprocal shading to provide natural cooling and ventilation.
- In Kerala, sloping roofs are used to guard against severe rains.

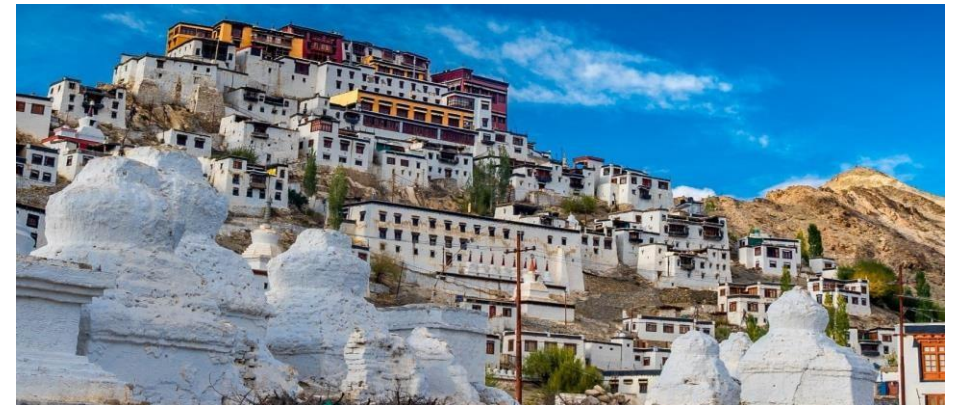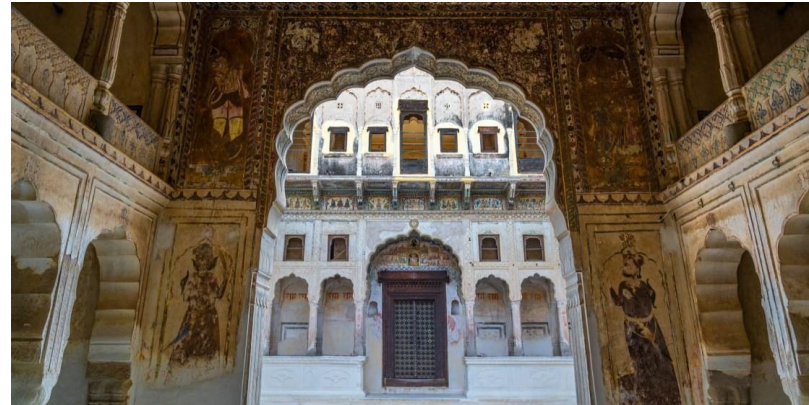

Passive Strategies & Building Physics

Passive Measures – Site Level

Reducing the 'heat island' effect with approaches like:


Courtyards / open courts are often surrounded by construction.

Taking advantage of block mutual shading

Using site massing to create wind passageways

lowering the amount of hard paving to allow for water absorption





Using complementary vegetation to manage the amount of sunlight that gets through as the seasons change

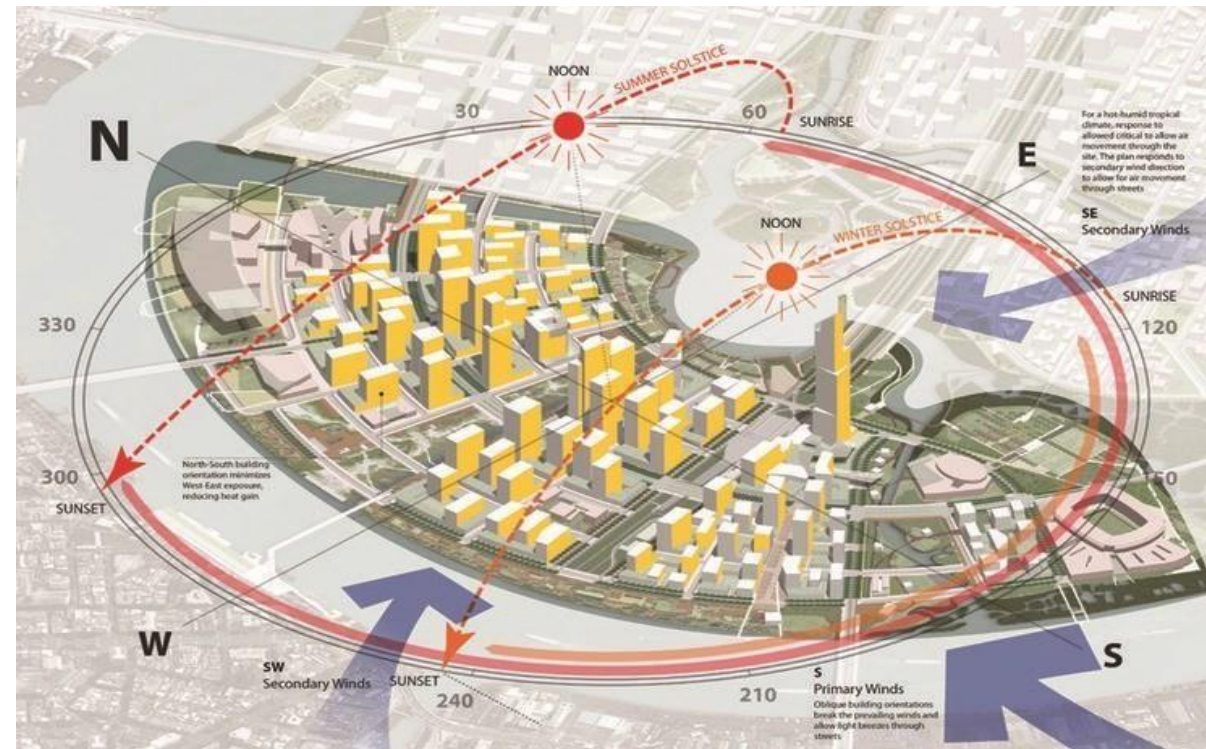

Passive Strategies & Building Physics

Passive Measures – Leveraging Plantation



Planting trees in the right places to provide shade and ventilation can significantly reduce the severity of intense weather. During heatwaves in Adelaide, a research found that districts with more vegetation cover remained cooler by up to 6°C.

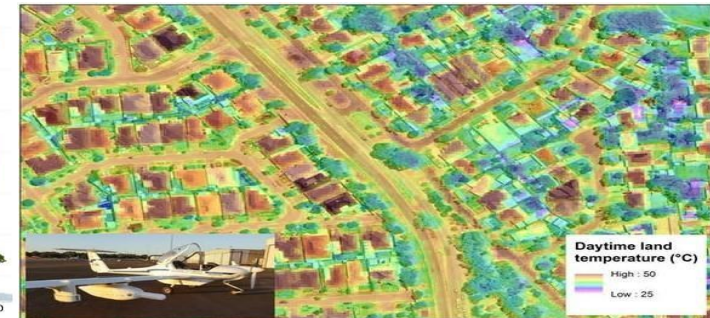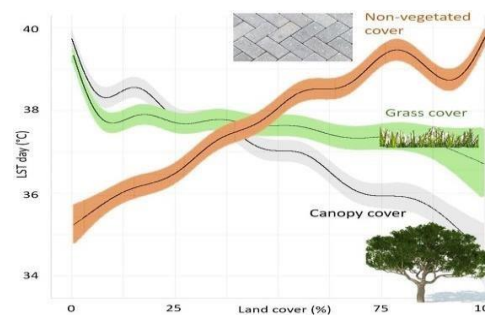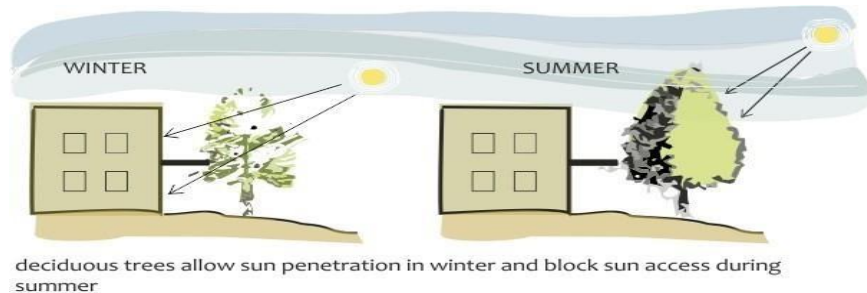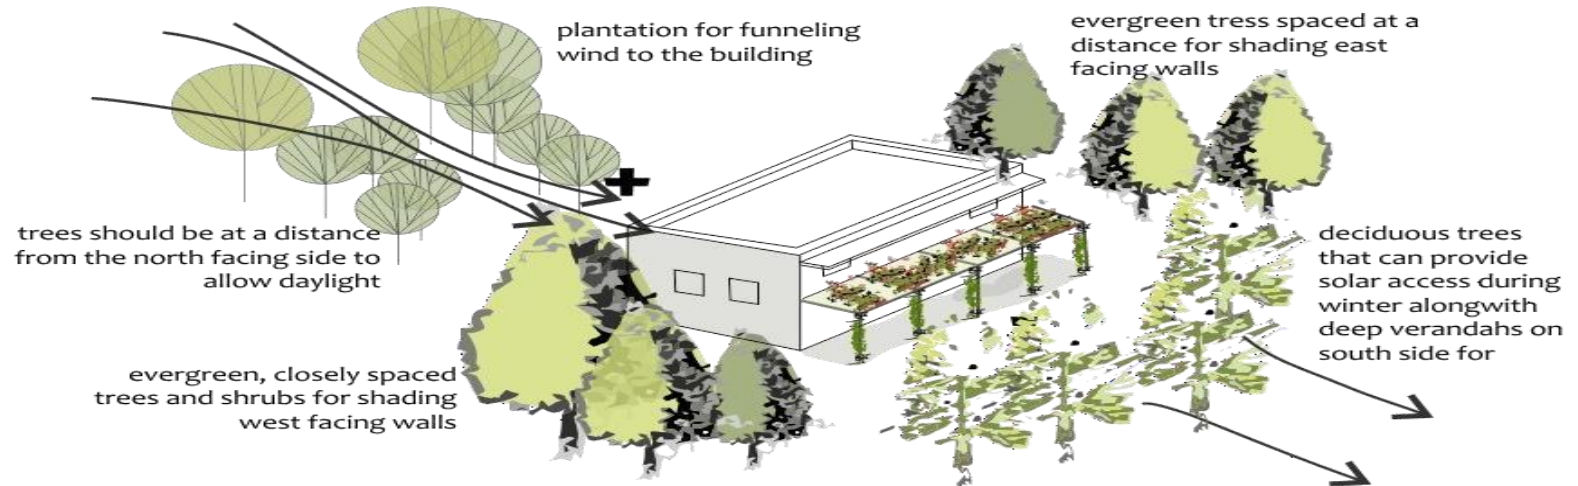

Passive Strategies & Building Physics

Block Level

Arrange the blocks so that mutual shade is obtained, avoiding solar heat buildup throughout the summer.

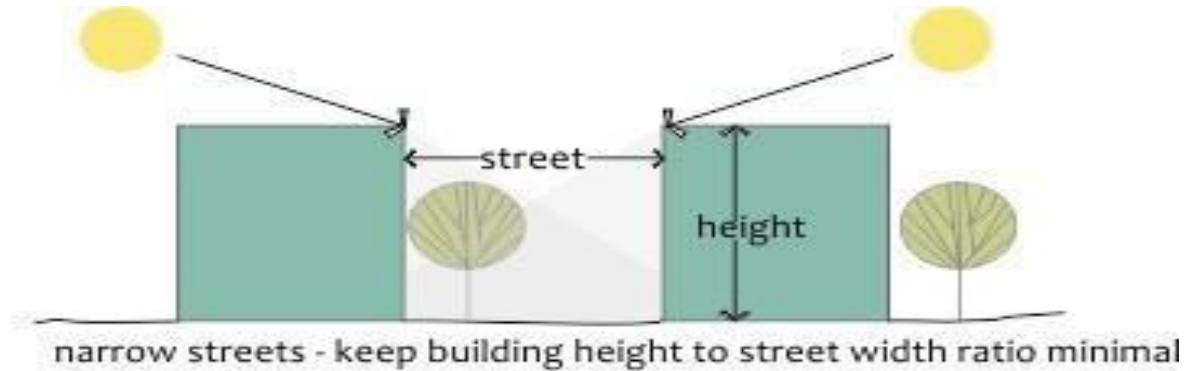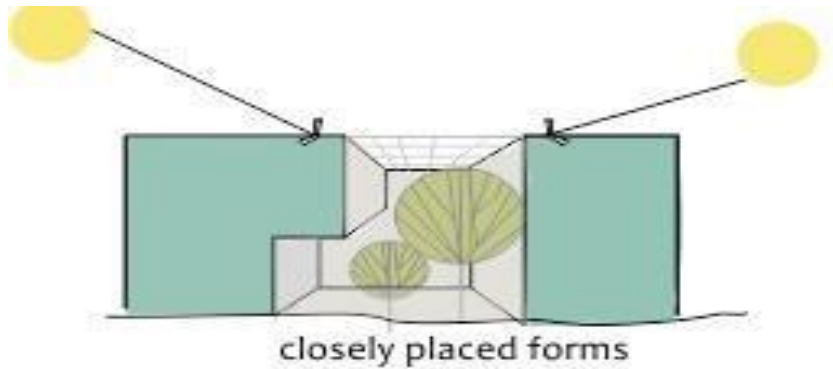

HEATING/
COOLING




Passive Strategies & Building Physics

Block Level


In harsh climate zones, reduce the surface area to building volume and perimeter to area ratios to reduce solar radiation exposure.

Minimise S/V ratio in extreme climates

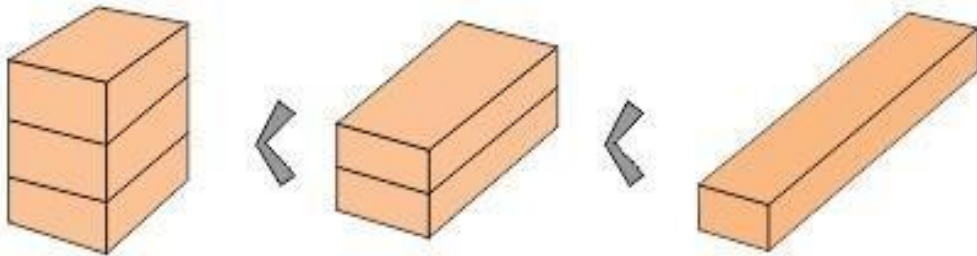

increase compactness by reducing
surface area for the same volume

Minimise P/A ratio in extreme climates

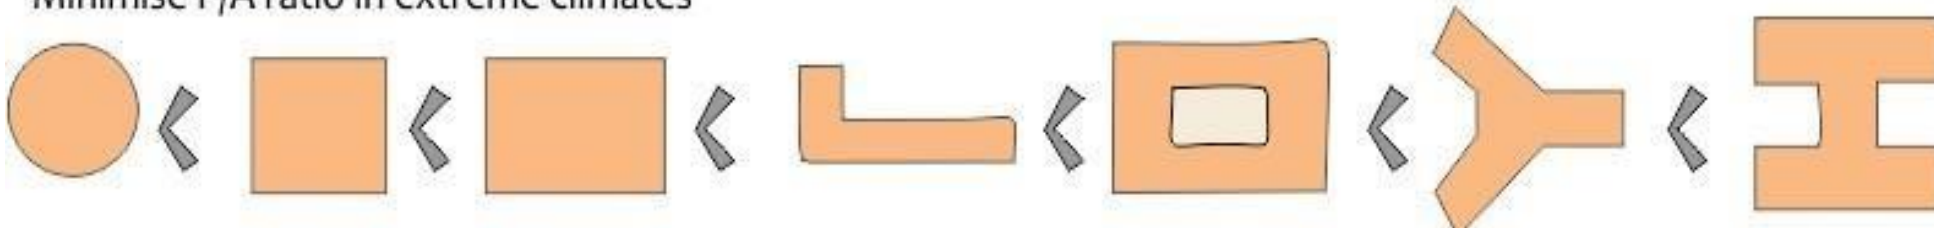


**HEATING/
COOLING**


Passive Strategies & Building Physics

Block Level


Wind shadows should be avoided by building orientation.

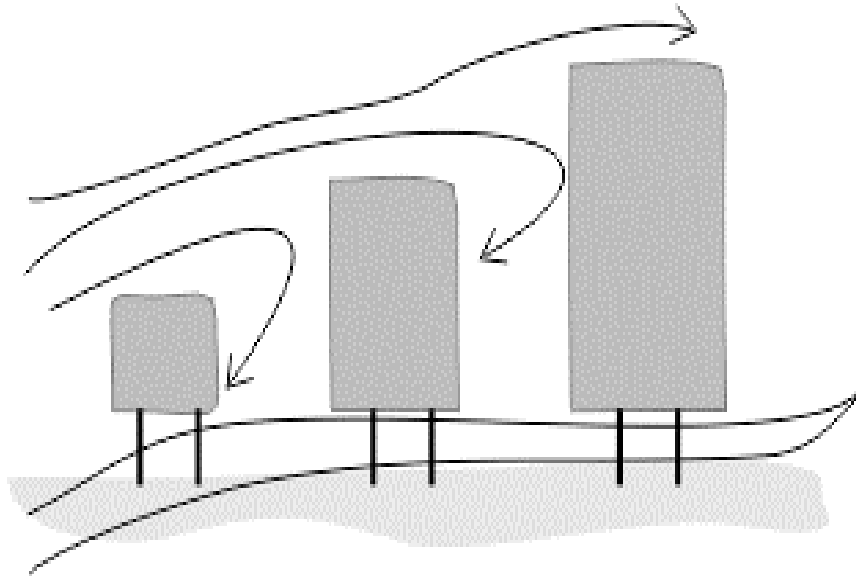

if a site has multiple buildings, they should be arranged in ascending order of their heights and be built on stilts to allow ventilation

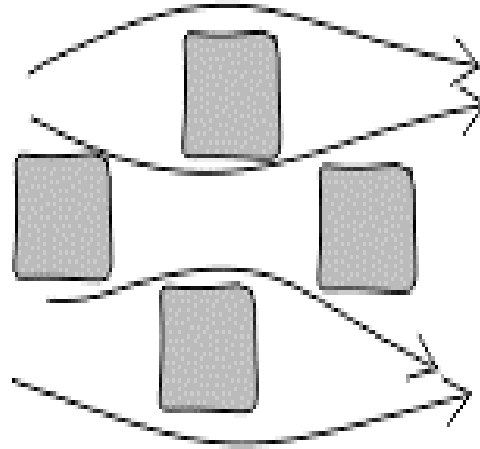

staggered layout helps in accentuating wind movement

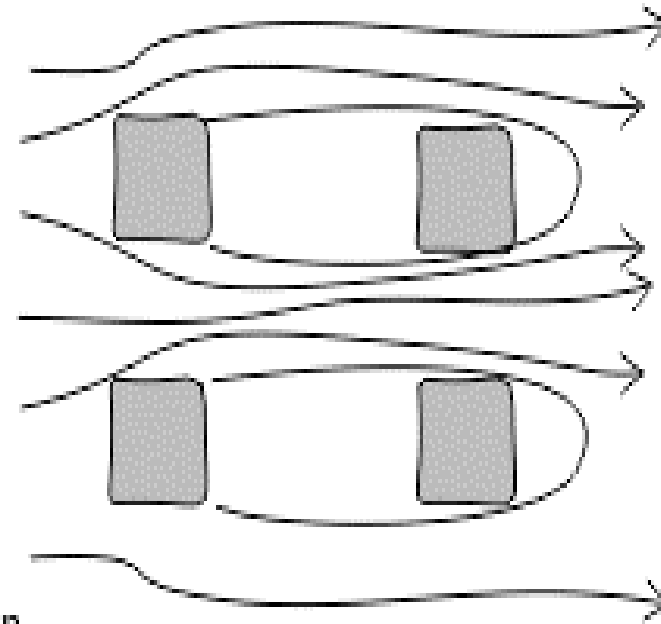


VENTILAT
ION

Passive Strategies & Building Physics

Block Level

Wind flows can be harnesses by constructing courts and catchment zones of various sizes. This can help to improve airflow and provide a cooling effect for the blocks.

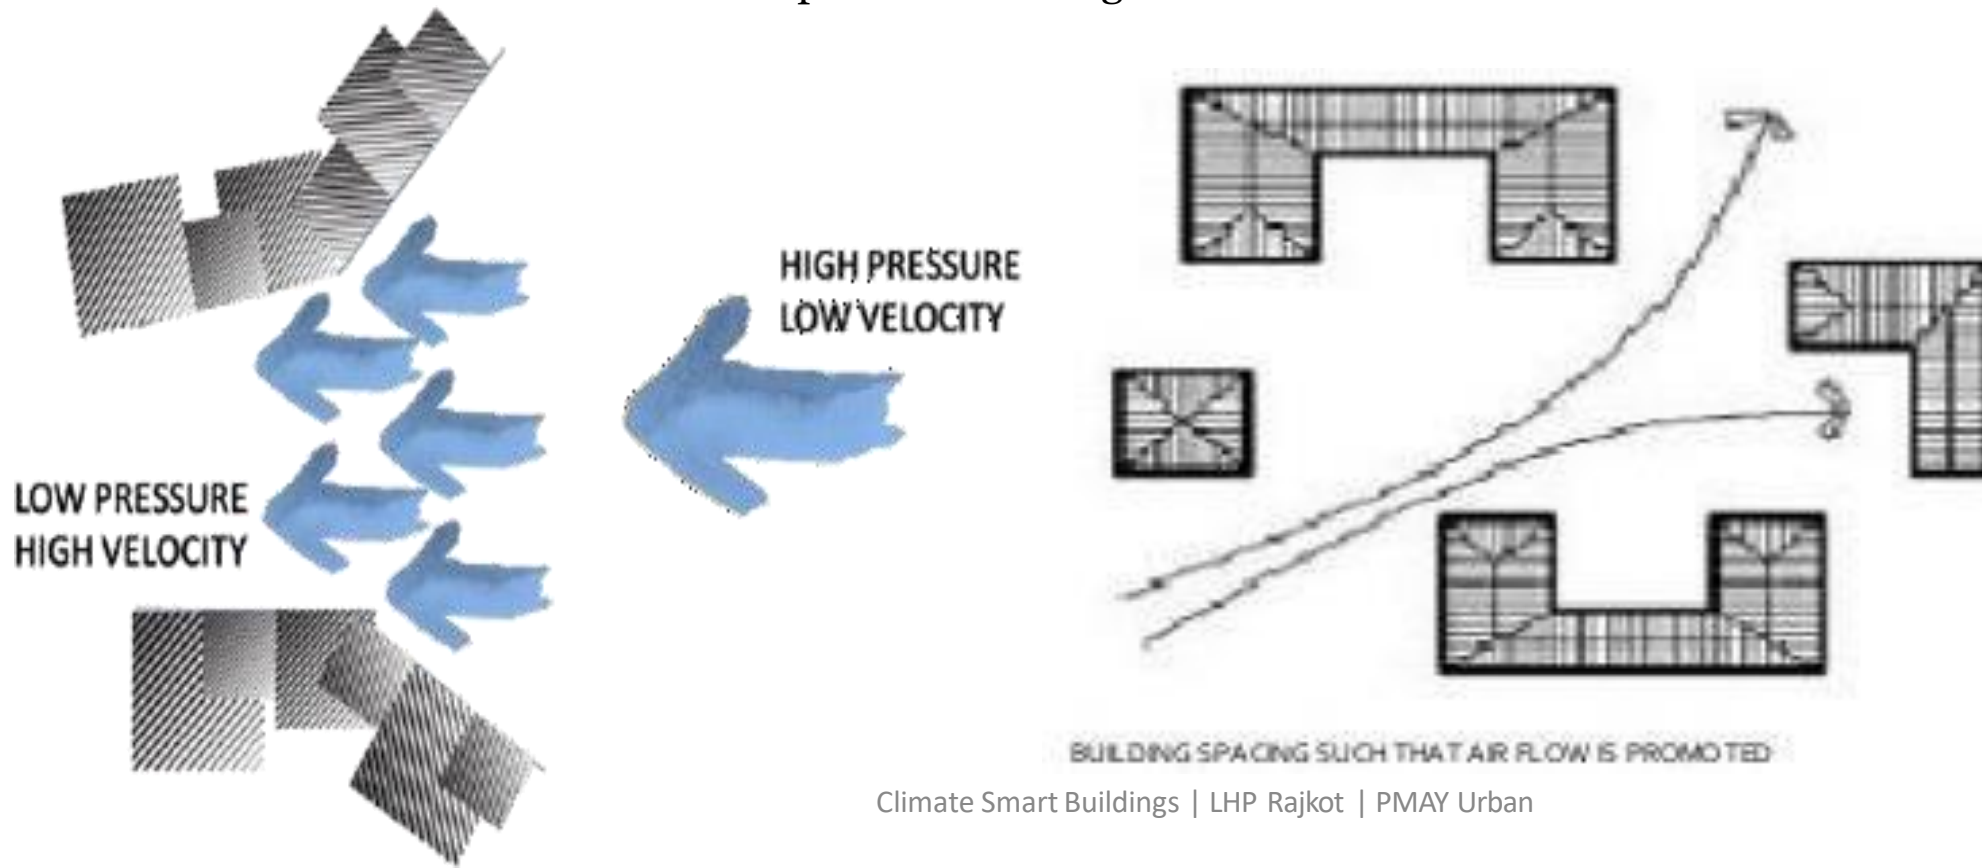

VENTILATION

Passive Strategies & Building Physics


Unit Level

FORMS AND ORIENTATION:

Sun radiation penetration patterns and, as a result, heat uptake and loss in a building are affected by changes in solar route during different seasons.

Internal layout is of the courtyard type, which is rather compact. Reduced sun exposure on East-West external walls to reduce heat gain.

If planned and situated on the east and, especially, the west end of the structure, non-habitable rooms (stores, bathrooms, etc.) can be efficient thermal barriers.

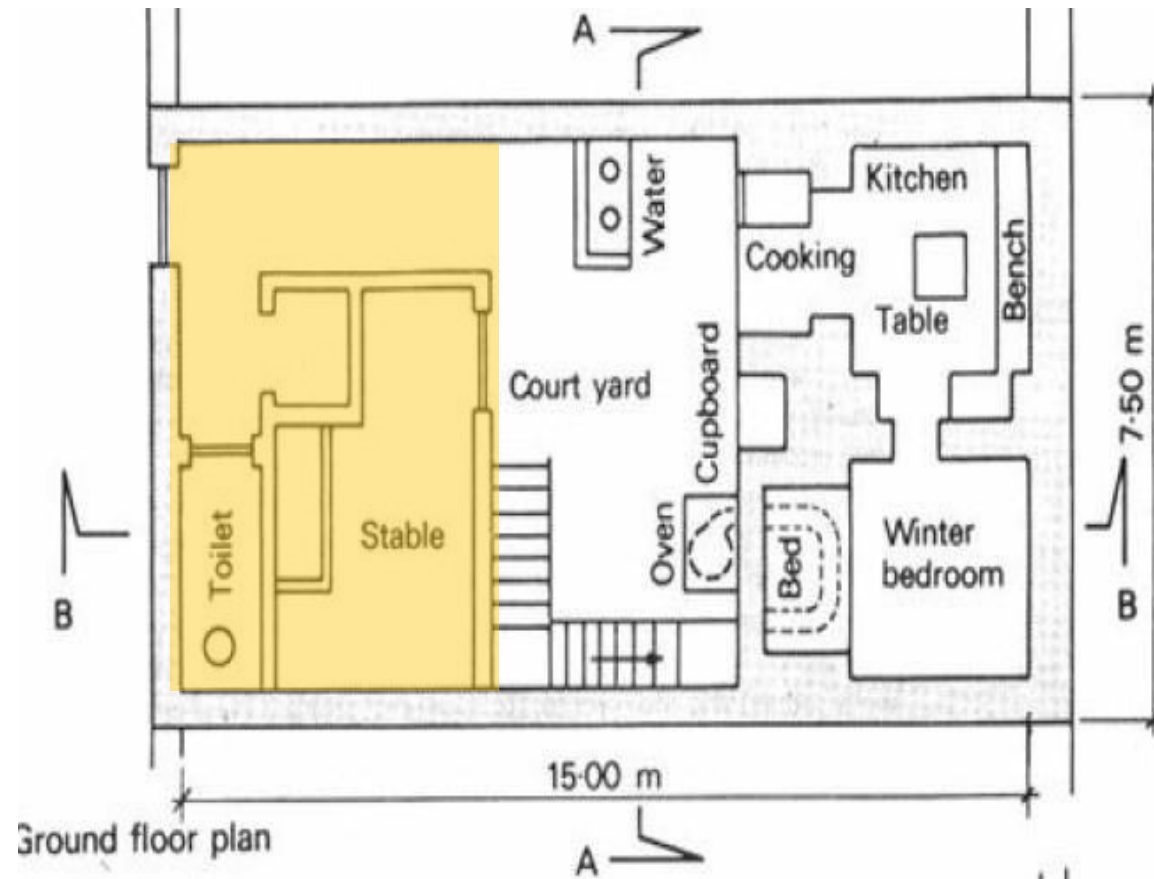

Climate Smart Buildings | LHP Rajkot | PMAY Urban

HEATING/
COOLING


Passive Strategies & Building Physics

Unit Level

FORMS AND ORIENTATION:

High walls block the sun, resulting in significant portions of the inner surfaces and courtyard floor being shaded during the day.

The dirt beneath the courtyard will extract heat from the surrounding places and remit it to the open sky during the night, resulting in cooler air and surfaces.

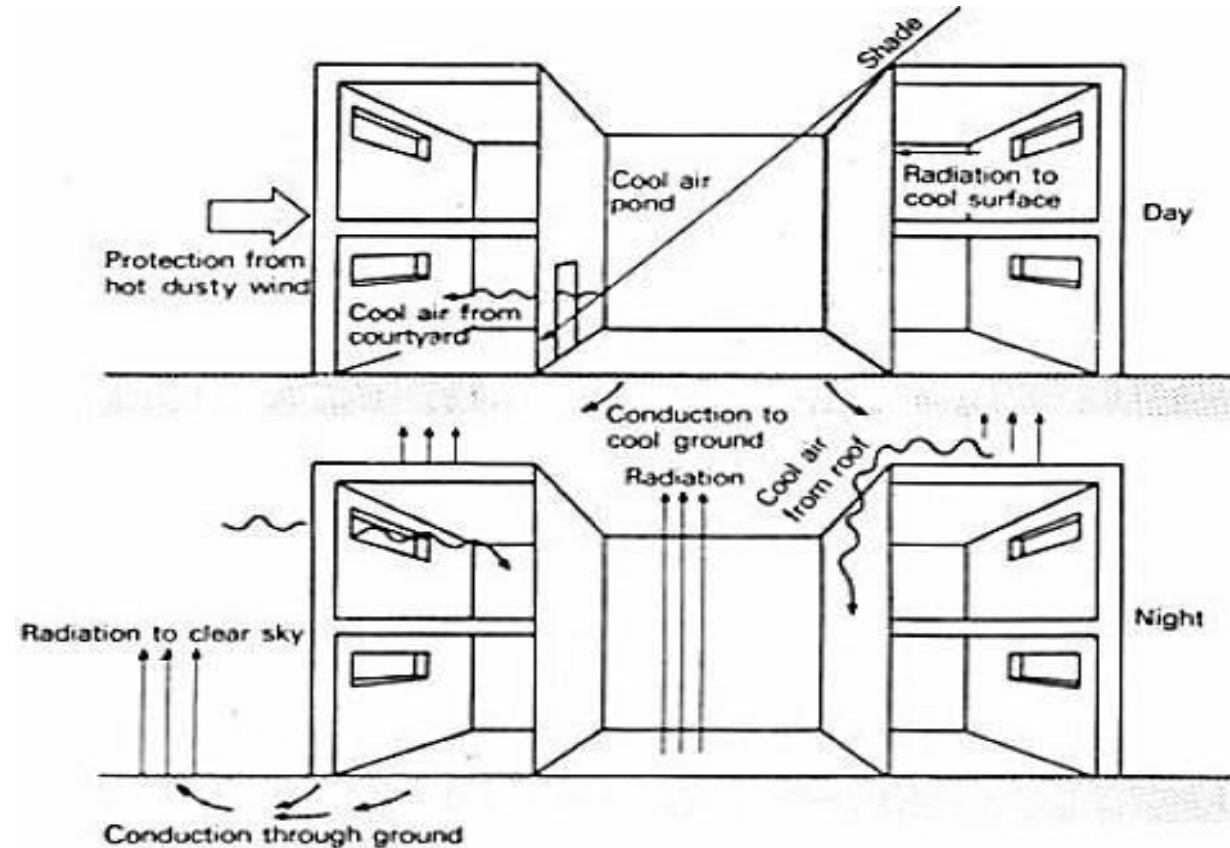


Passive Strategies & Building Physics

Unit Level

THERMAL MASS:

Thermal mass can be combined with night-time convective cooling, sometimes known as "night cooling," to passively cool buildings. Thermal mass as a passive cooling and heating approach requires a large diurnal swing.

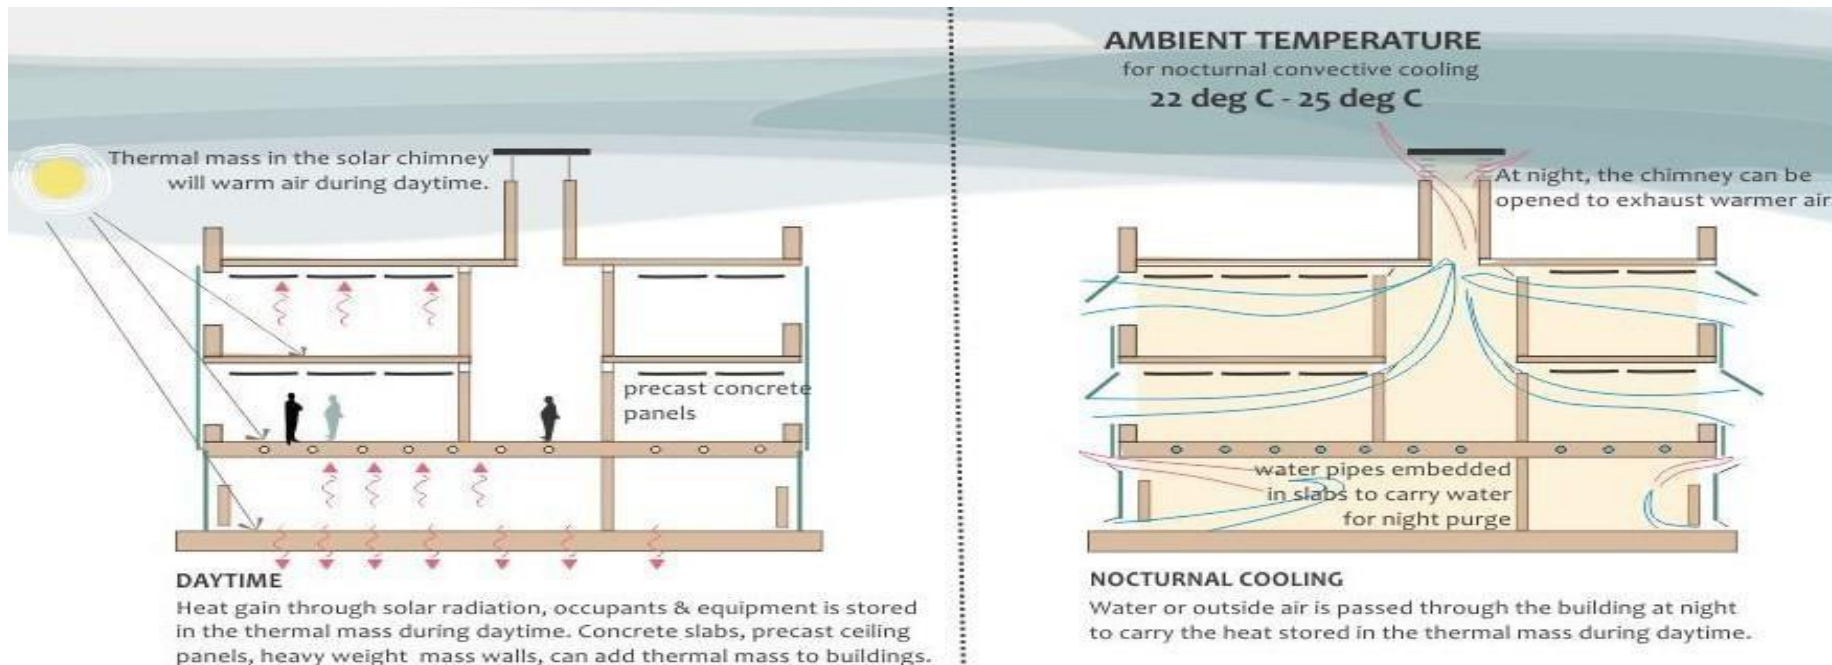

HEATING/
COOLING



Passive Strategies & Building Physics

Unit Level

SHADING:

Shade-producing plants, such as creepers, can be used.

Fenestrations and shades/chajjas can be built to maximise solar radiation depending on the environment.

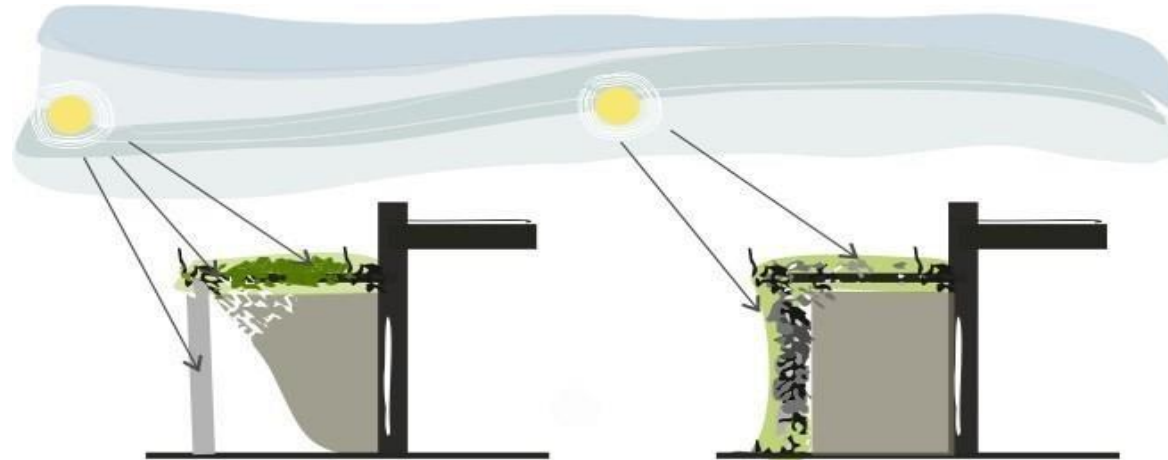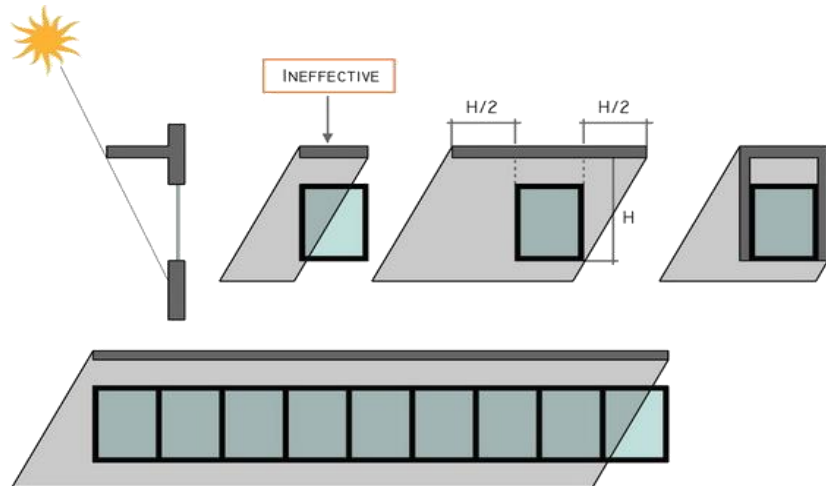

HEATING/
COOLING

Passive Strategies & Building Physics

Unit Level

ORIENTATION:

Buildings can be orientated in relation to the prevailing wind direction at angles ranging from 0° to 30° .

In buildings with a courtyard, positioning the courtyard 45 degrees from the prevailing wind maximises wind flow into the courtyard and improves cross ventilation in the building (in climates where cooling is required).

CREATING PRESSURE DIFFERENCES:

A 'squeeze point' occurs when wind enters through a smaller opening and escapes through a larger opening. This generates a natural vacuum, which speeds up the wind.

The total area of apertures should be at least 30% of the total floor space.

The window-to-wall-ratio (WWR) should not exceed 60%.

VENTILATION





13

Innovative Building Materials



Walling Material and Walling Assemblies

Heat Transfer in Buildings: Insulation and Thermal Mass

Thermal Insulation, Thermal Conductivity

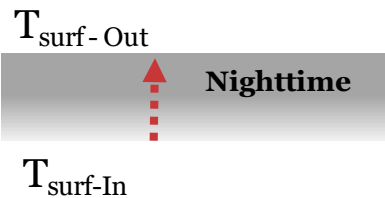

Thermal Insulation, Specific Heat Capacity

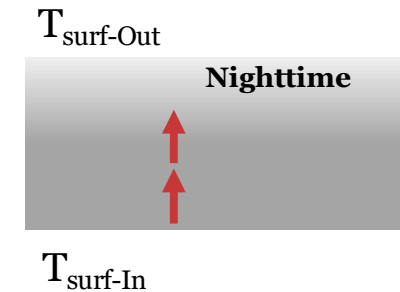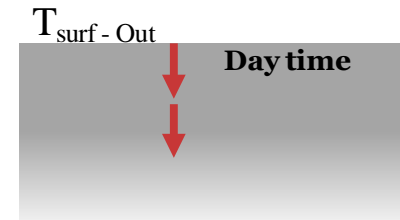

Source: unsplash. (n.d.). Cloth. unsplash. Retrieved from <https://images.unsplash.com/photo-1564814183940-fb79790e1e45?ixlib=rb-1.2.1&q=80&fm=jpg&crop=entropy&cs=tinyrgb&dl=mhrezaa-O5R-dr8E2qk-unsplash.jpg>


Walling Material and Walling Assemblies

Walling Materials and Methods: Insulation and Thermal Mass



The main thermal insulating material in buildings is locked air

Air is a poor thermal conductor

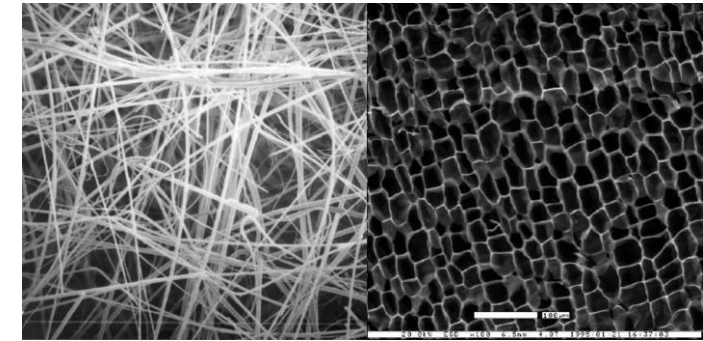



Air is locked in foam bubbles or between fibers

Bubble walls and fibers are themselves opaque to thermal radiation.

Information and Image Courtesy: Prof. Cloude Roulet, EMPA, Switzerland, Indo Swiss BEEP project, BEE, India


Walling Material and Walling Assemblies

Walling Materials and Methods : Conductivity & Thermal Bridge

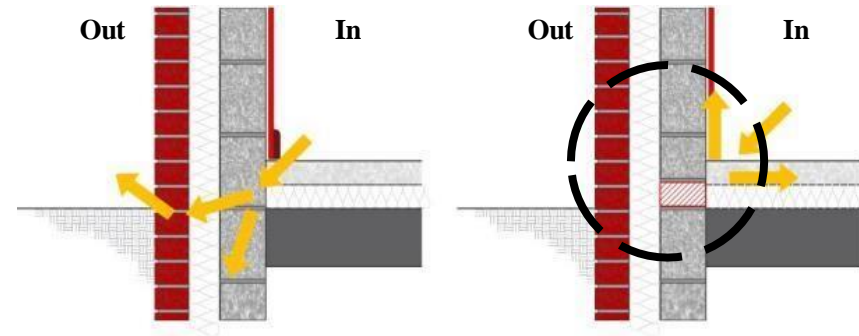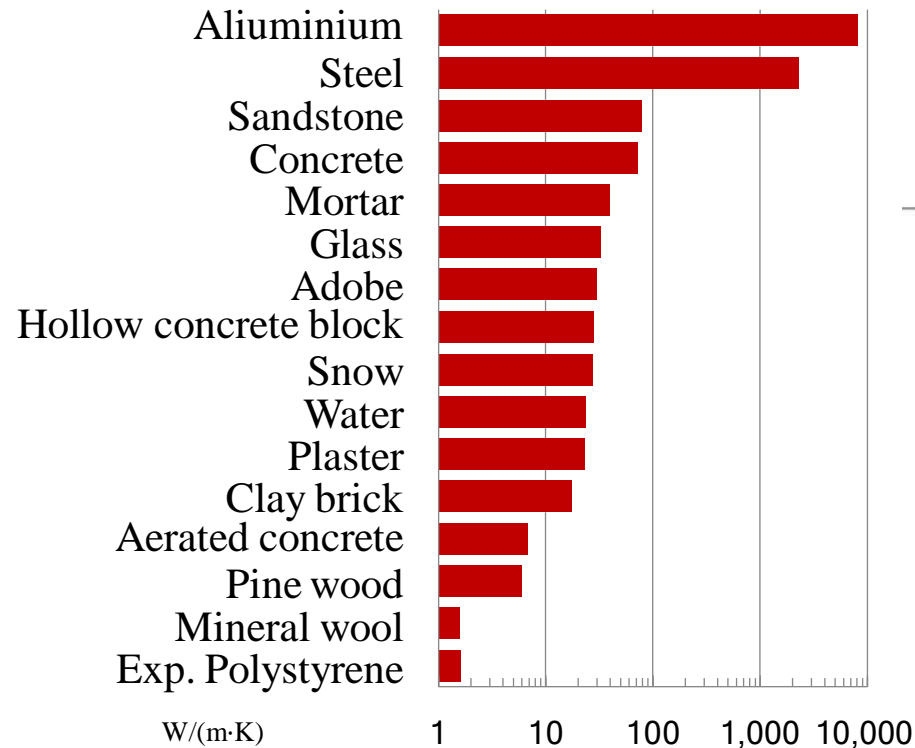

Air = 1

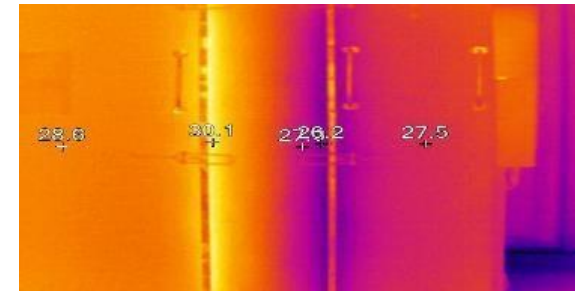













0.0002 Sq mts of aluminium (2 Sq Cms) = 1 Sq mts of insulation



Information and Image Courtesy: Prof. Cloude Roulet, EMPA, Switzerland, Indo Swiss BEEP project, BEE, India

Walling Material and Walling Assemblies

Walling Materials and Methods : Construction

1				
2			5	 
3			6	 
4			7	 


Minimum Thickness Needed to Achieve U value of $< 0.40 \text{ W/m}^2\text{K}$

Information and Image Courtesy: Prof. Cloude Roulet, EMPA, Switzerland, Indo Swiss BEEP project, BEE, India

Walling Material and Walling Assemblies

Walling Materials and Methods : Construction

Steady State Indoors and Variable Outdoors – Hot and Sunny Outdoors

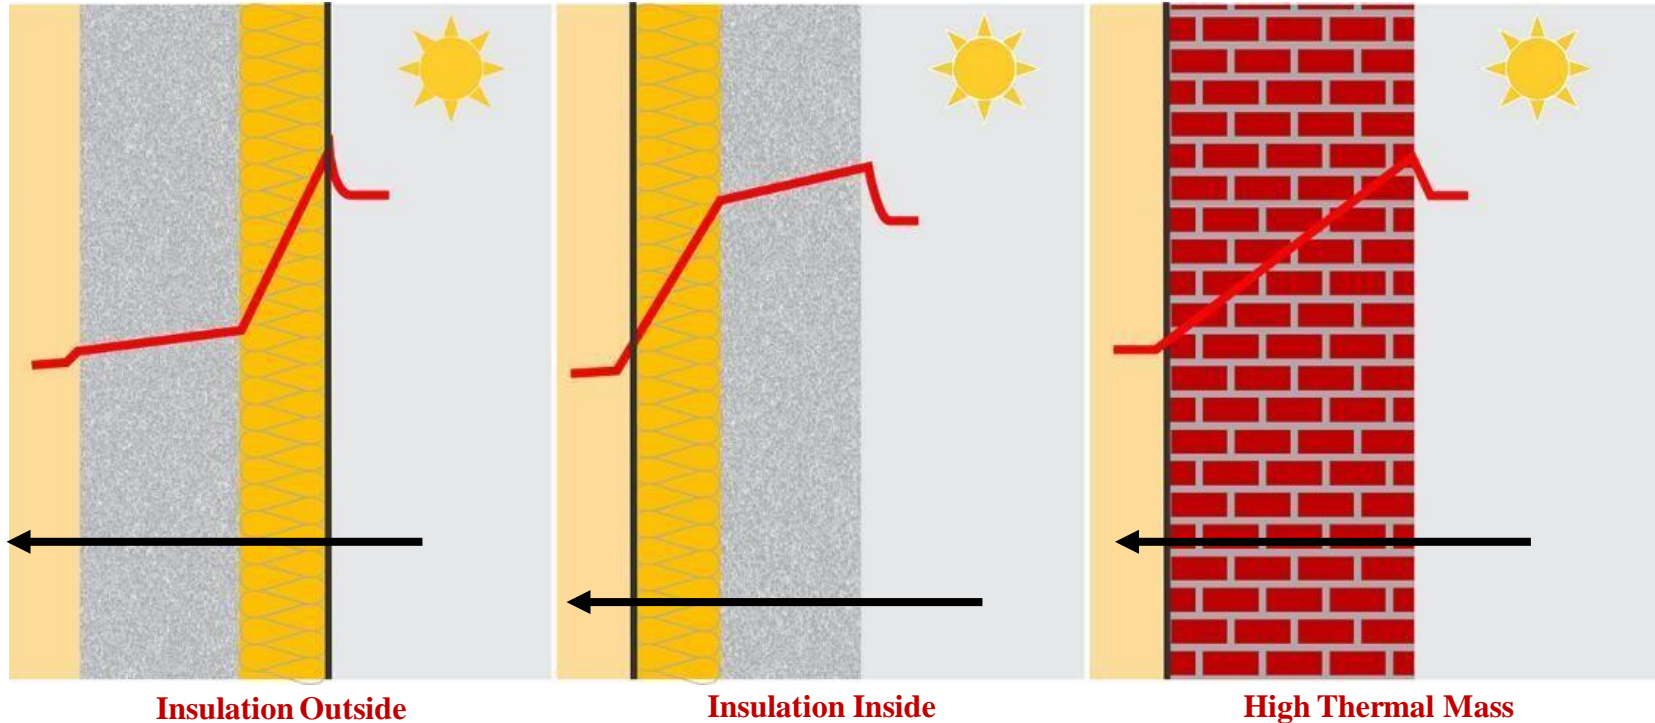


Information and Image Courtesy: Prof. Cloude Roulet, EMPA, Switzerland, Indo Swiss BEEP project, BEE, India

Walling Material and Walling Assemblies

Walling Materials and Methods : Construction

Steady State Indoors and Variable Outdoors – Cold and Sunny Outdoors

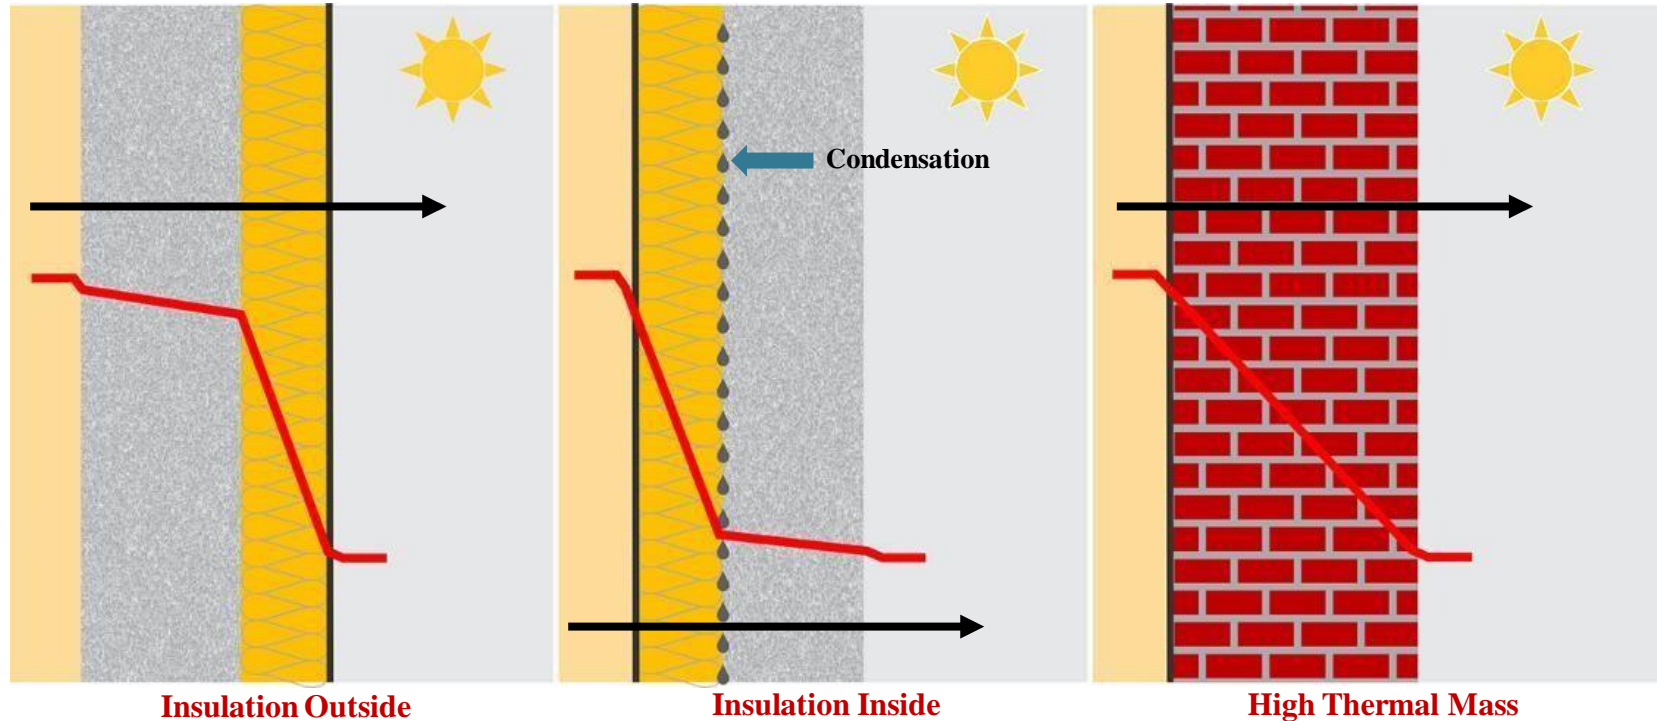


Information and Image Courtesy: Prof. Cloude Roulet, EMPA, Switzerland, Indo Swiss BEEP project, BEE, India

Walling Material and Walling Assemblies

Walling Materials and Methods : Construction

Variable Indoors and Variable Outdoors

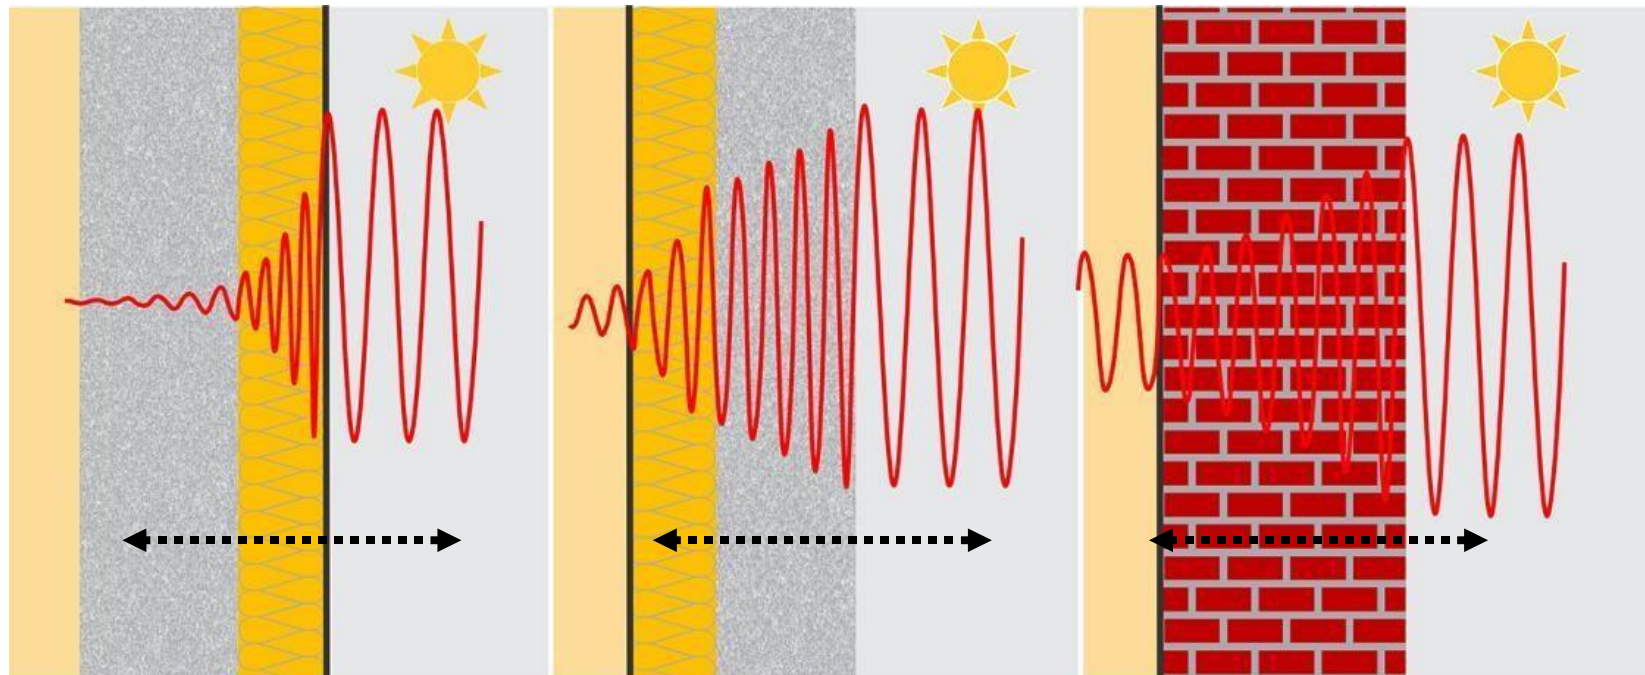

Insulation Outside


Insulation Inside

High Thermal Mass


Information and Image Courtesy: Prof. Cloude Roulet, EMPA, Switzerland, Indo Swiss BEEP project, BEE, India

Walling Material and Walling Assemblies


Nonhomogeneous Walling Technologies, Industrial



**230 MM Clay Brick
Wall Base Line**




Rat Trap Bond



LGFSS- EPS




PPGL




GFRG Unfilled




GFRG Partially Filled

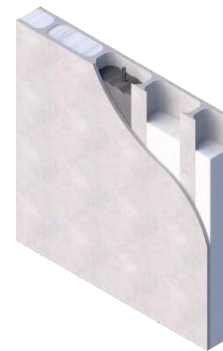

GFRG Fully Filled

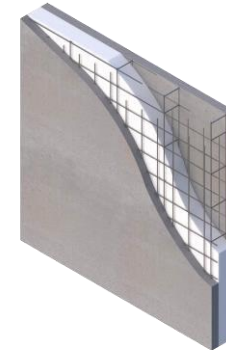


Reinforced EPS Core

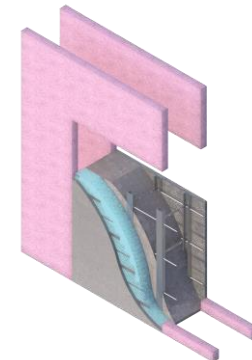

Stay-in-Place Coffered

Walling Material and Walling Assemblies

Walling Technologies: U Values, Industrial

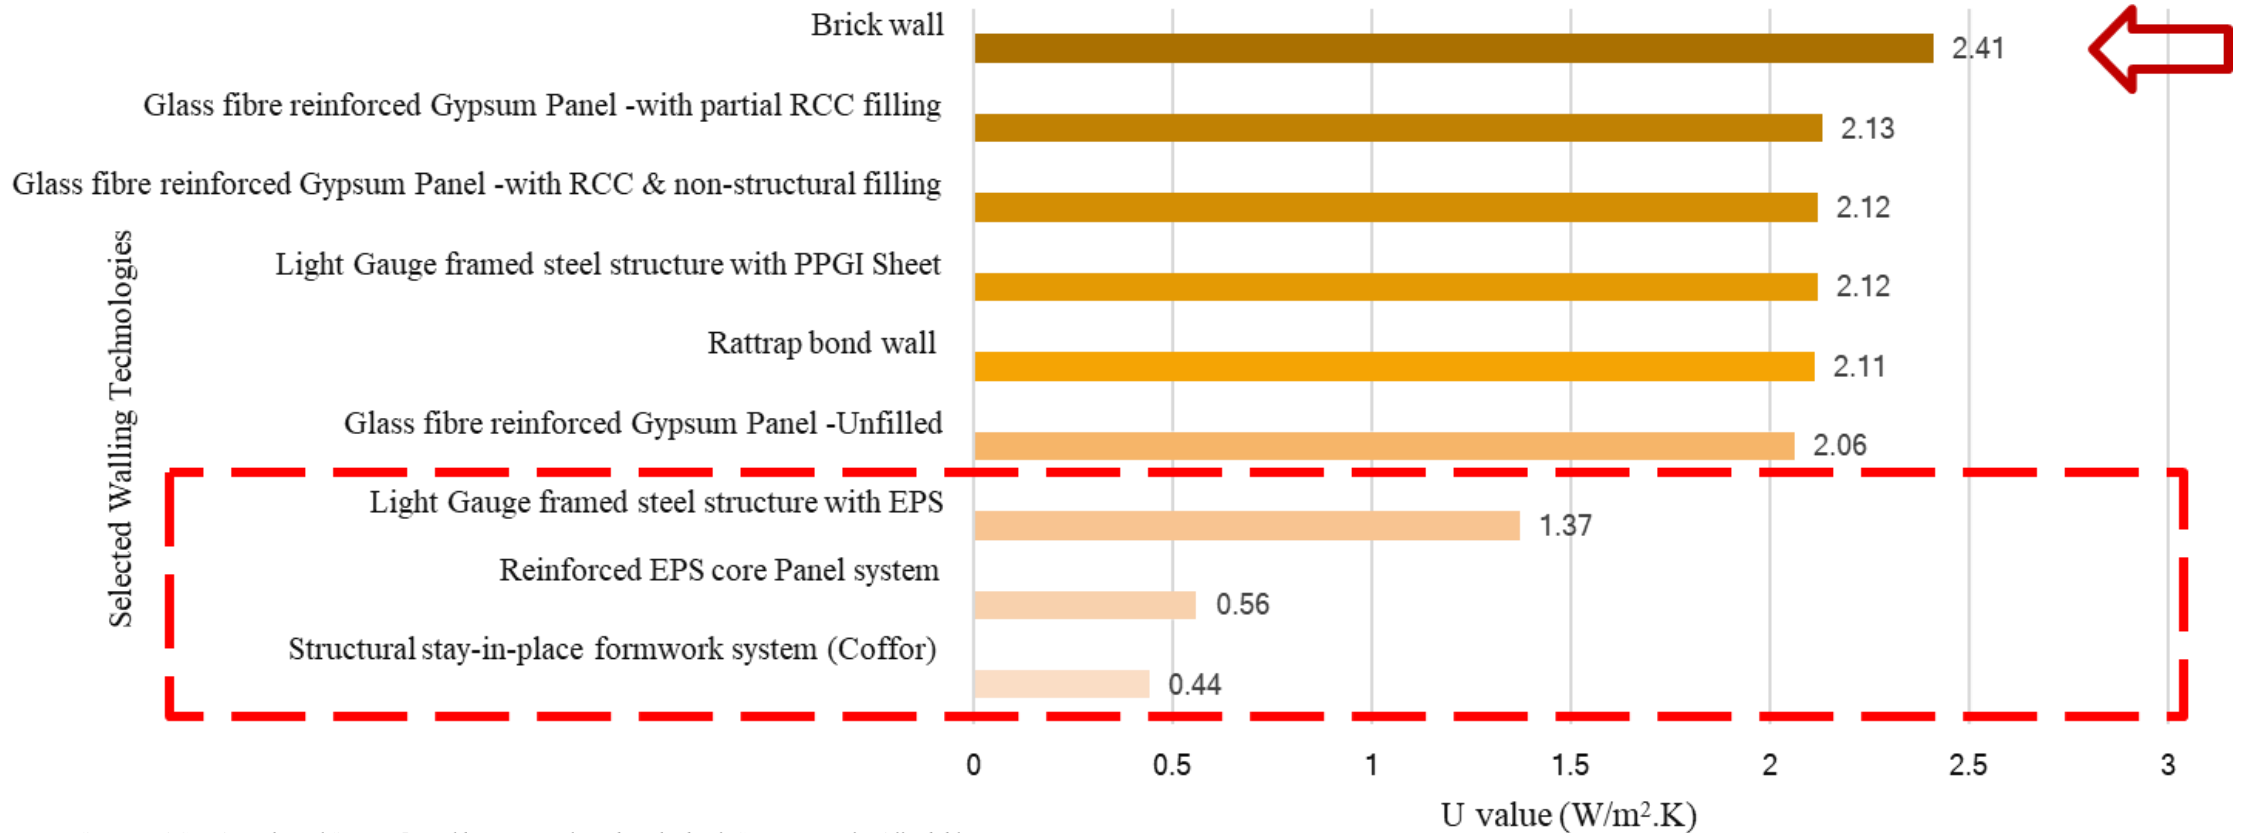

Source: RACHNA, Technical Session 5: Building Materials and Methods of Construction for Affordable Housing,
CEPT

Climate Smart Buildings | LHP Rajkot | PMAY Urban

Walling Material and Walling Assemblies

Nonhomogeneous Walling Technologies, Traditional

Bamboo-Crete
U - VALUE ($W/m^2 K$)= 1.82




Wattle and Daub
U - VALUE ($W/m^2 K$)= 2.09



Stabilized Adobe
U - VALUE ($W/m^2 K$)= 1.50




Laterite block wall
U - VALUE ($W/m^2 K$)= 1.61

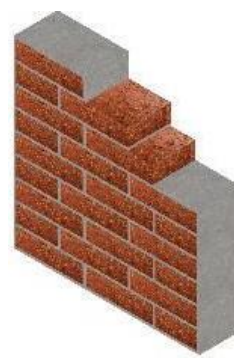

Unstabilized Adobe
U - VALUE ($W/m^2 K$)= 1.57



**Compressed Stabilized Earth
block wall**
U - VALUE ($W/m^2 K$)= 1.59

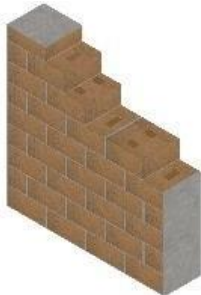

**Unstabilized Compressed
Earth block wall**
U - VALUE ($W/m^2 K$)= 1.42



AAC block wall
U - VALUE ($W/m^2 K$)= 0.45



**Unstabilized Rammed Earth
Wall assembly**
U - VALUE ($W/m^2 K$)= 1.68




**Stabilized Rammed Earth
Wall assembly**
U - VALUE ($W/m^2 K$)= 1.495



Walling Material and Walling Assemblies


Walling Technologies: U Values, Traditional

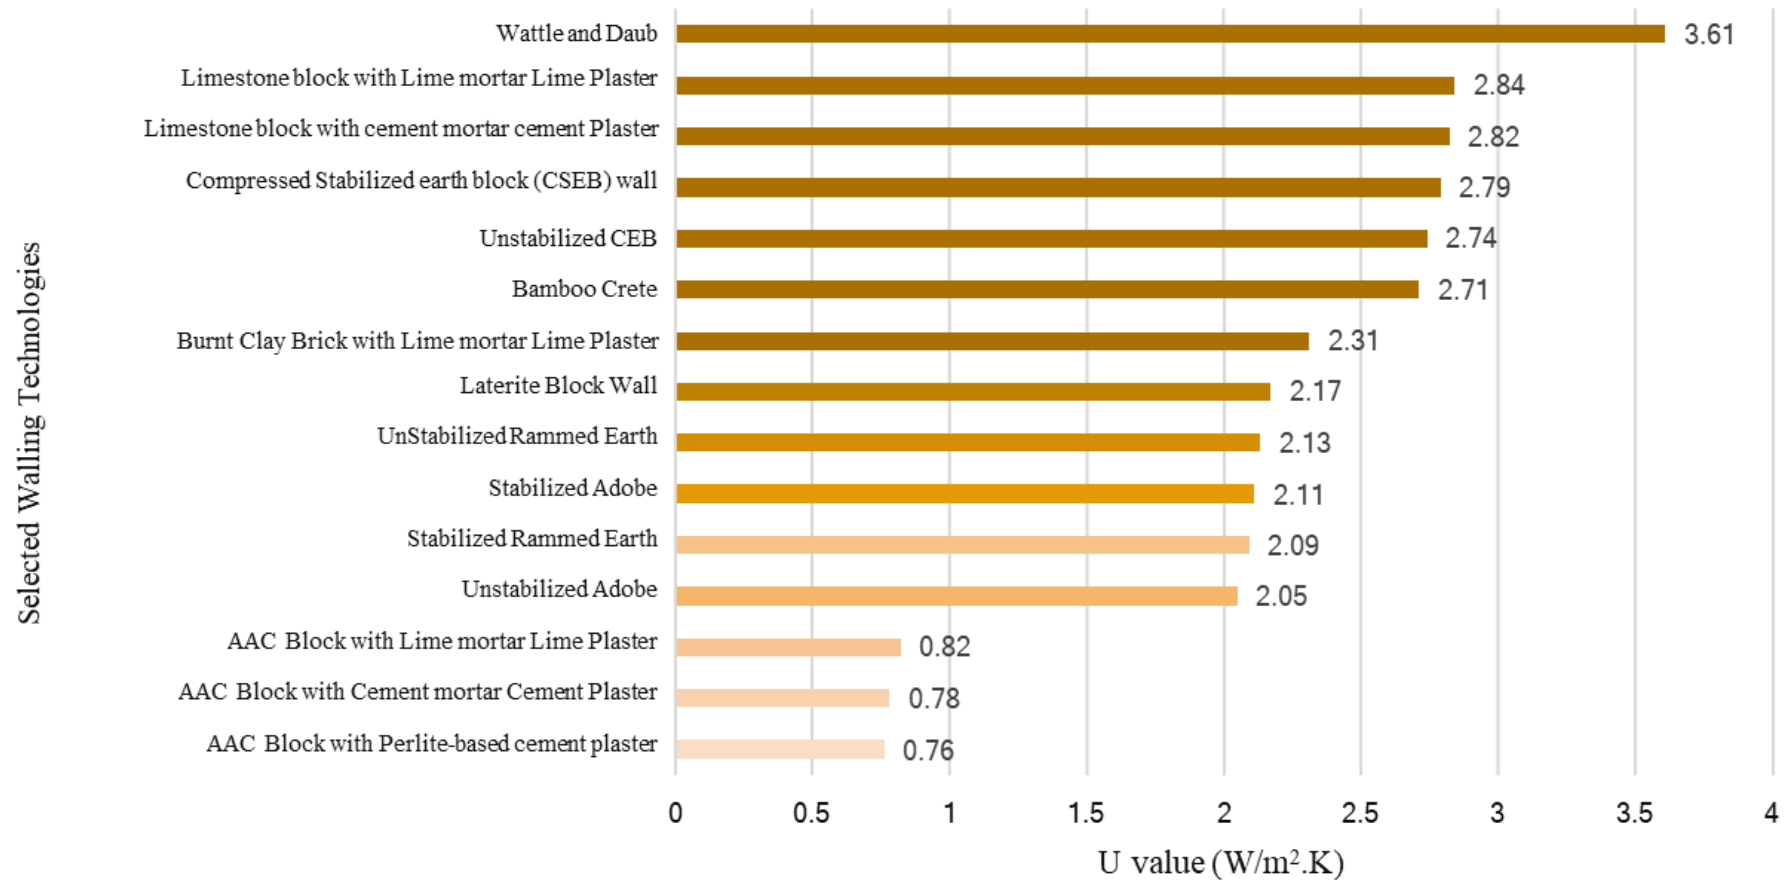

GLAZING MATERIAL and GLAZING ASSEMBLIES


Glazing Material and Glazing Assemblies

Glazing Material and Methods: Solar Spectrum

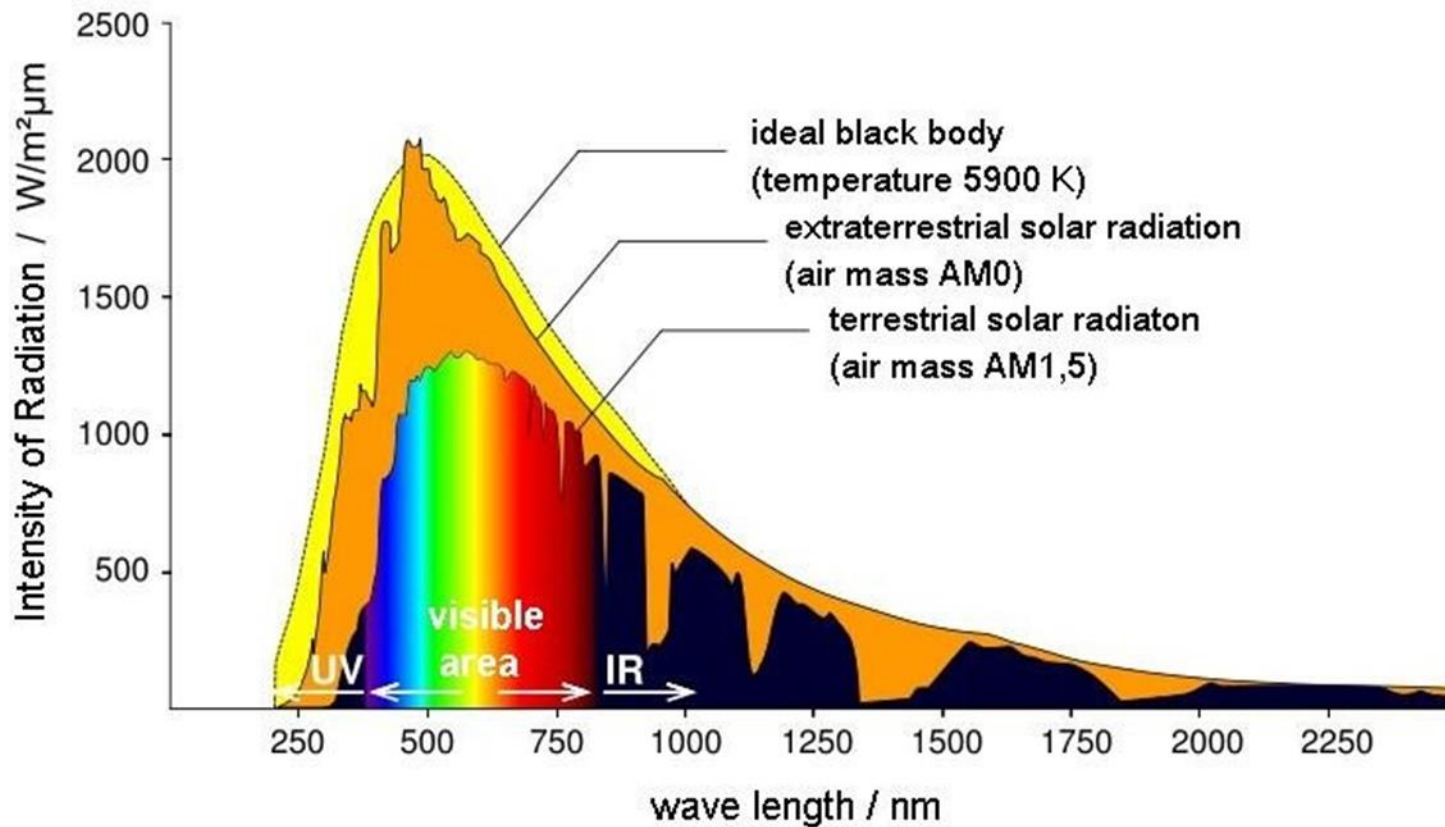

Glazing Material and Glazing Assemblies


Glazing Material and Methods : Solar Radiation through Glass

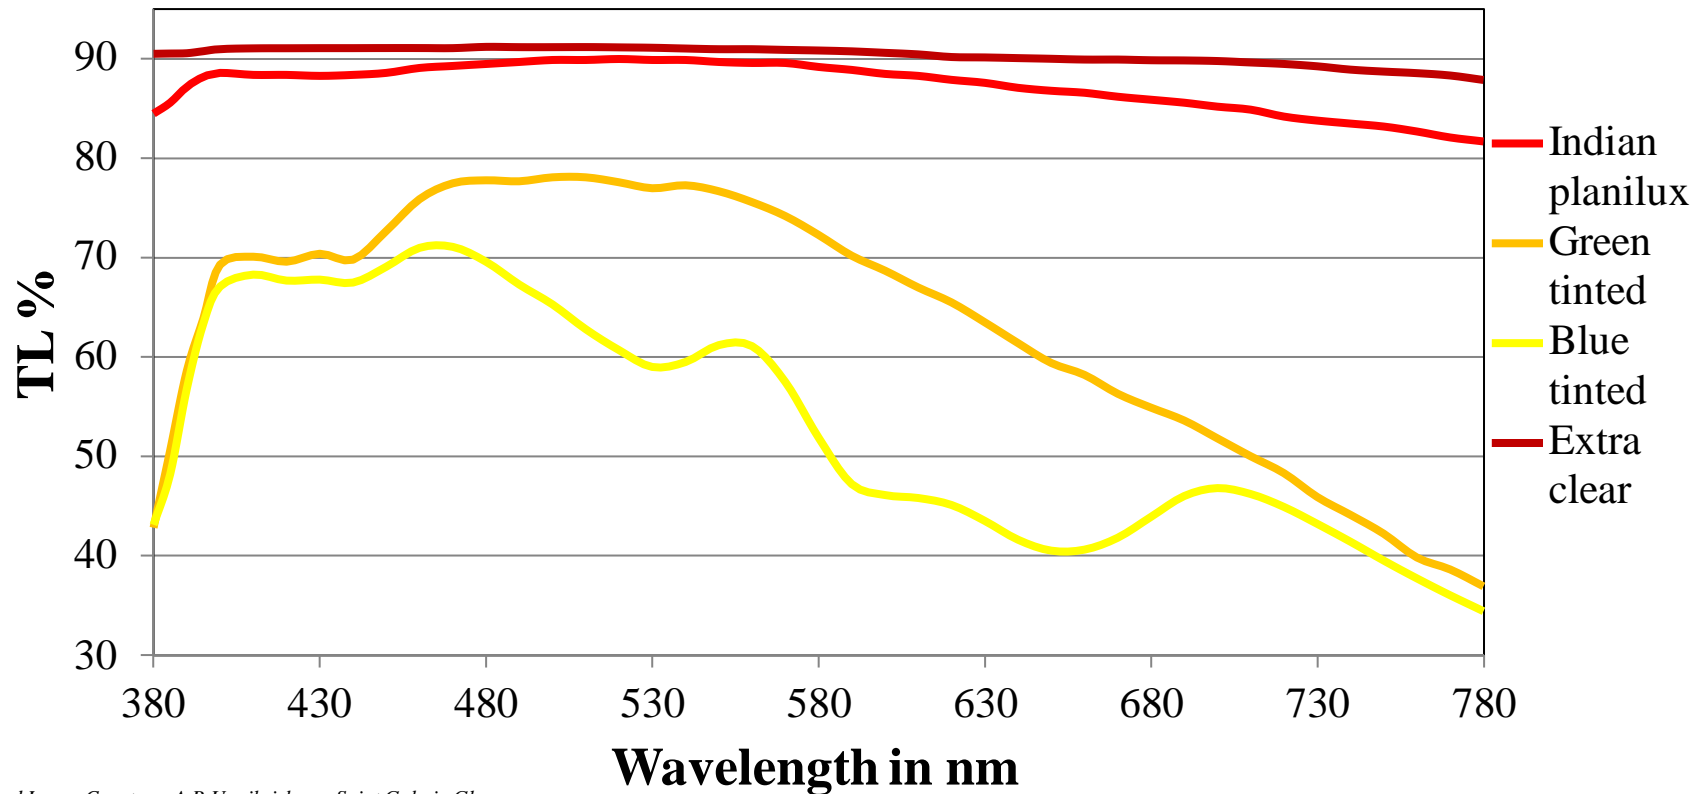

Information and Image Courtesy: A.R Unnikrishnan, Saint Gobain Glass


Glazing Material and Glazing Assemblies

Glazing Material and Methods : Solar Control

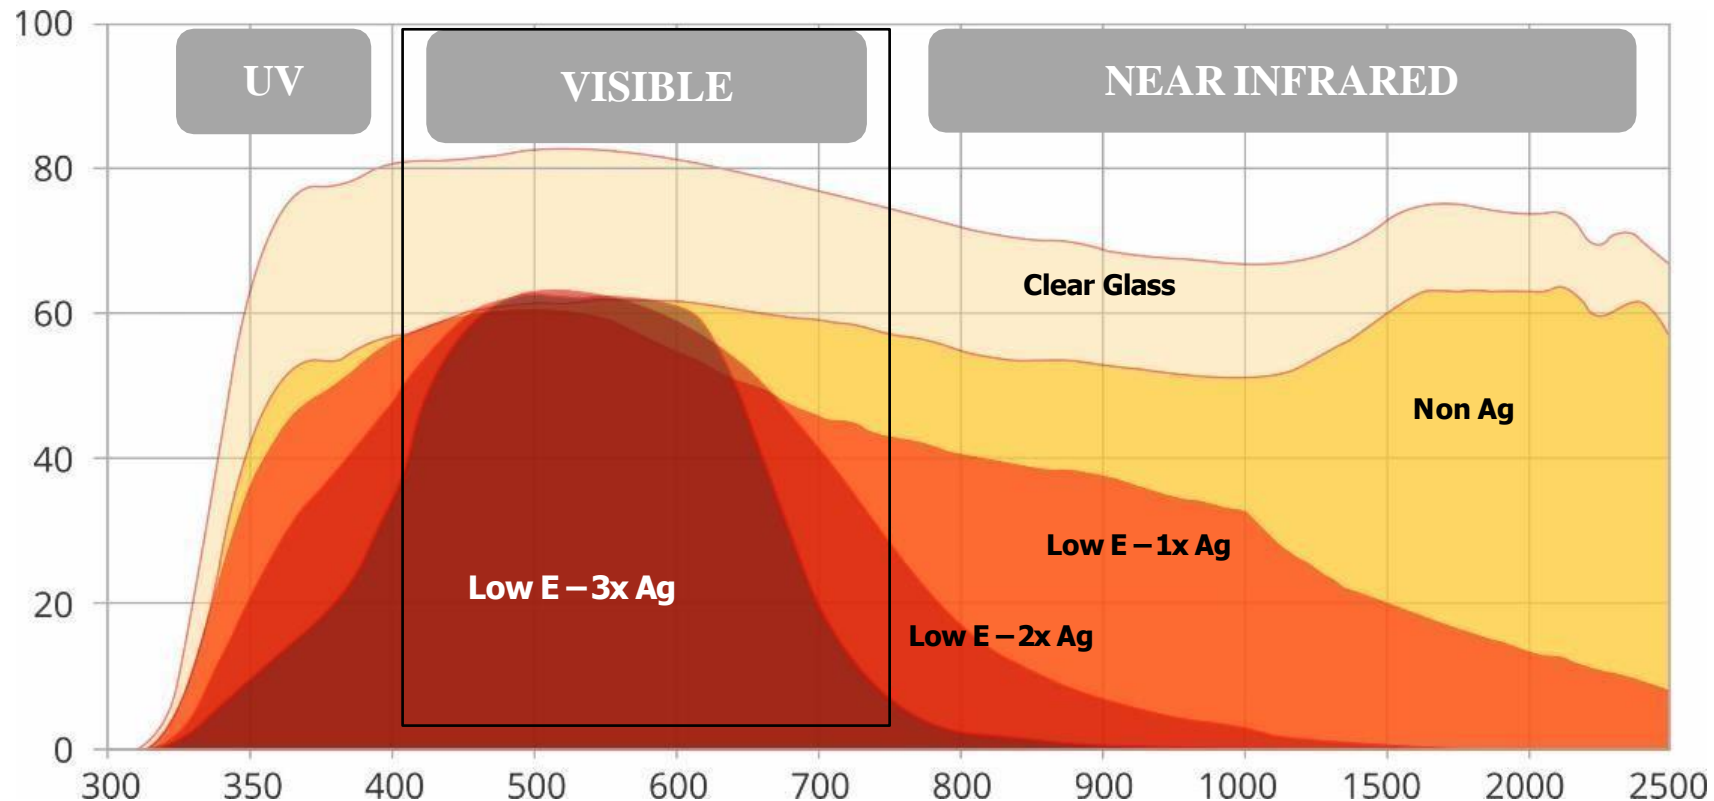

Glazing Material and Glazing Assemblies

Glazing Material and Methods : Solar Control

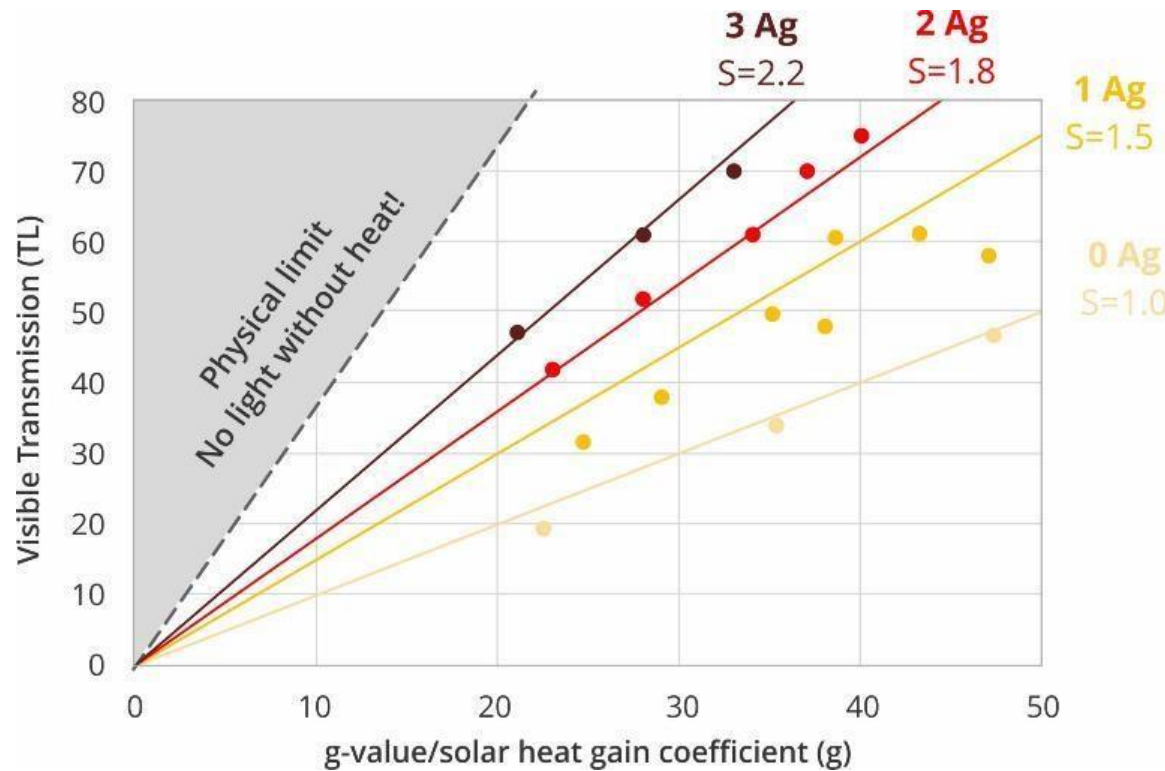


$$\text{Selectivity} = \frac{TL}{g} = \frac{\text{Light}}{\text{Heat}}$$

Silver (Ag) based coater products have the maximum selectivity

The higher the selectivity the better the performance of glass, it enables optimum light to enter our living spaces while blocking excess heat

Glazing Material and Glazing Assemblies



Glazing Material and Methods : Cooling Load Reduction

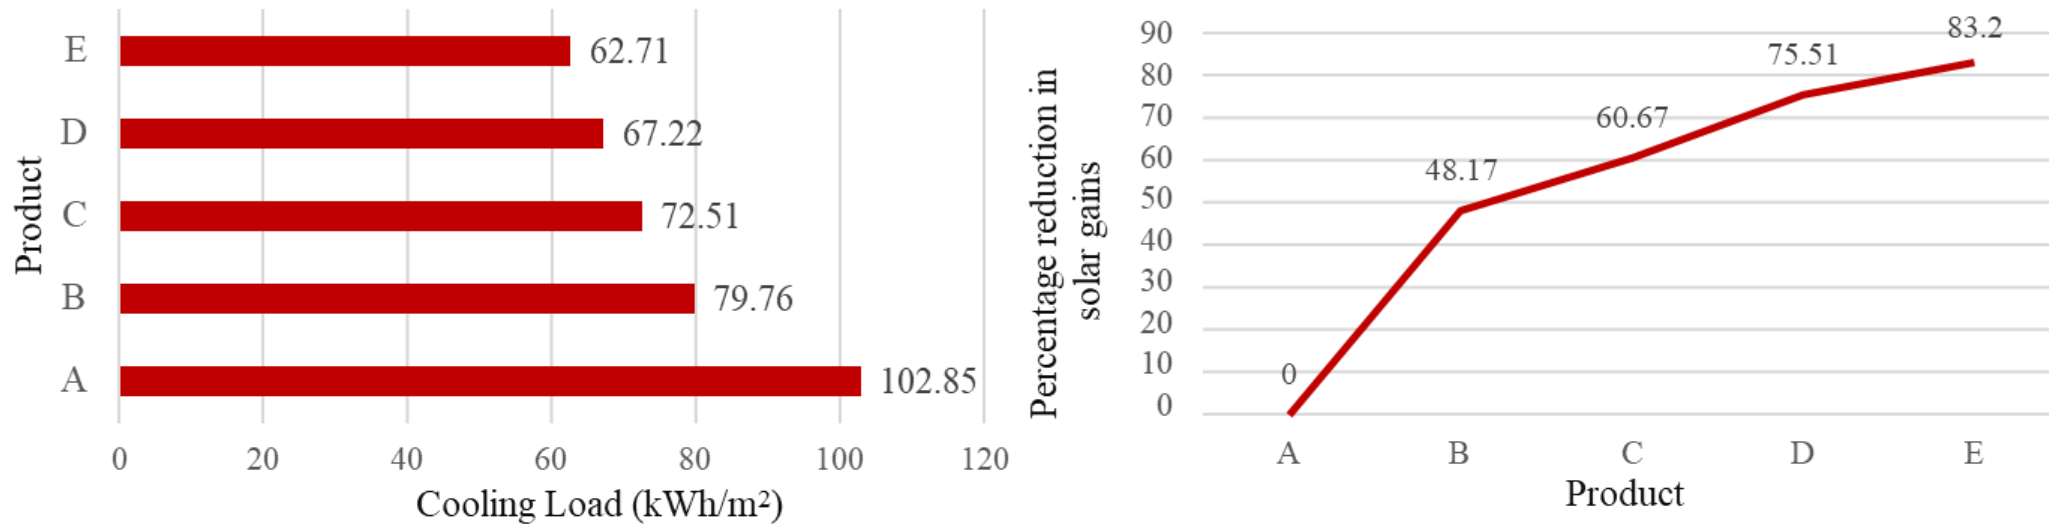

Product	VLT (%)	External Reflection (%)	Internal Reflection (%)	Solar Factor	Shading coefficient	U-value
A	80	15	15	0.76	0.87	2.6
B	46	16	18	0.22	0.25	1.5
C	46	20	22	0.47	0.54	2.8
D	51	18	22	0.28	0.33	1.5
E	47	17	11	0.38	0.43	1.9

Glazing Material and Glazing Assemblies


Glazing Material and Methods : Window Frame

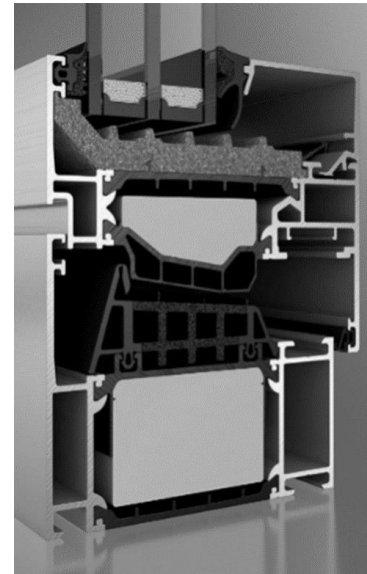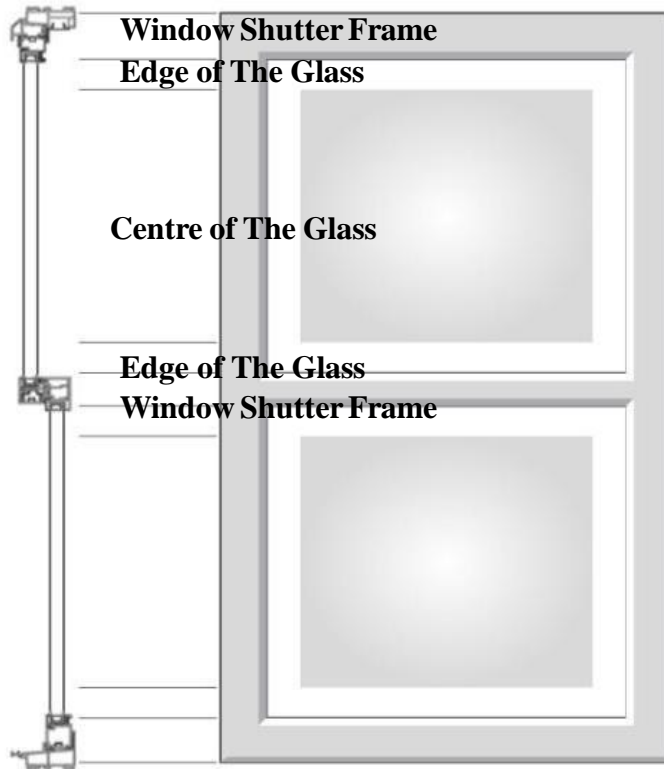

Source: Neuffer. (n.d.). Schüco Aws 90. Neuffer. Retrieved from <http://192.169.1.1:8090/httpclient.html> Grabex. (n.d.). Sliding-Folding Doors For Your Space. Grabex. Retrieved from <https://grabex.co.uk/doors/bi-fold->

Glazing Material and Glazing Assemblies

Glazing Material and Methods : Window Frame

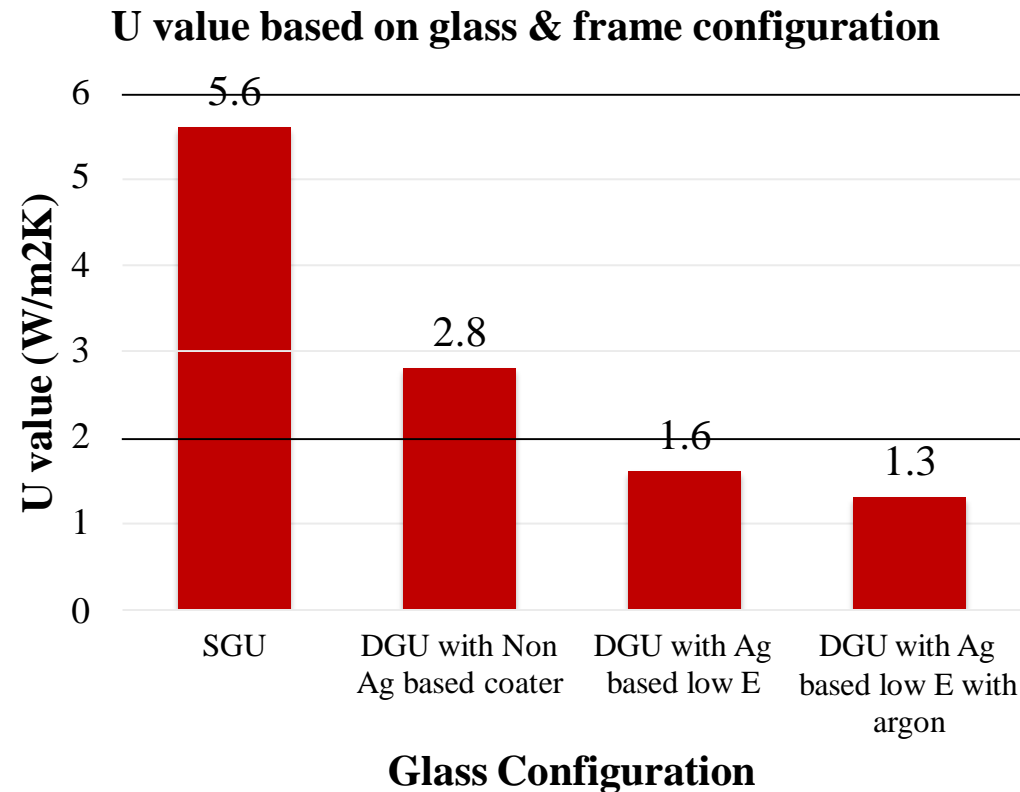


SGU



DGU
with air



DGU with
Argon gas



1.1
W/m².K




1.5 W/m².K

1.7 W/m².K

ROOFING COATING MATERIAL

Glazing Material and Glazing Assemblies


Roofing Coating Material : Black Body

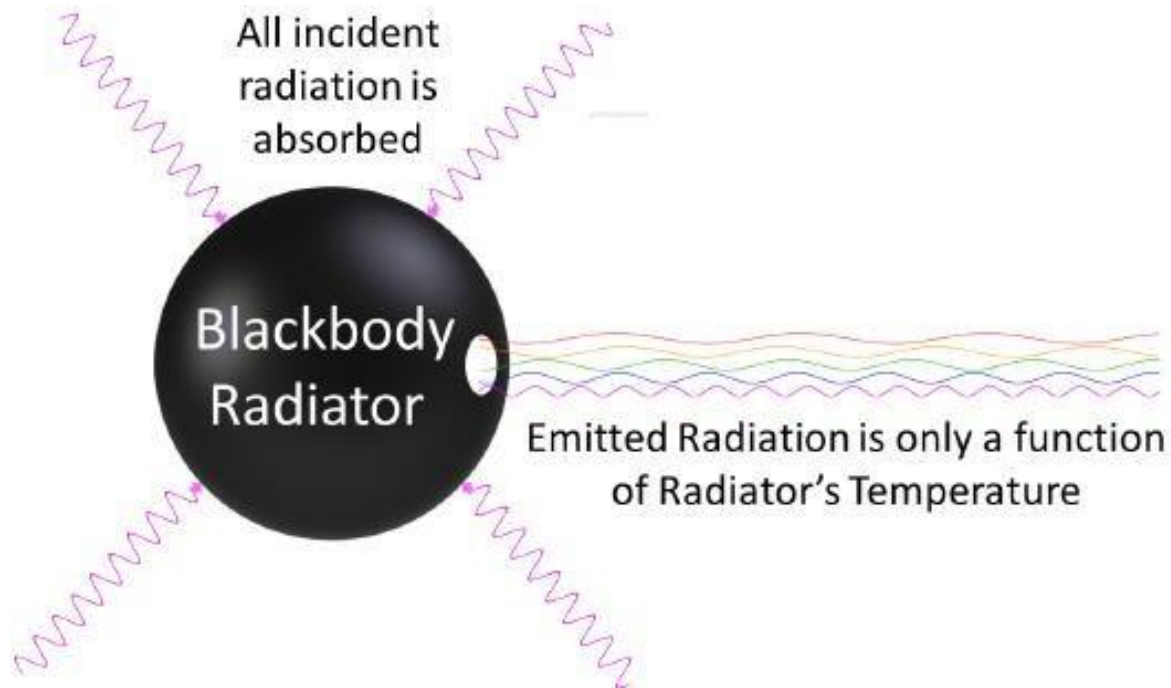

Source: freepik. (n.d.). Food Wood . freepik. Retrieved from <https://www.freepik.com/photos/food-wood>, freepik. (n.d.). Saucepan. freepik. Retrieved from <https://www.freepik.com/vectors/saucepan>

Glazing Material and Glazing Assemblies

Roof Coating Material and Solar Reflectance Index

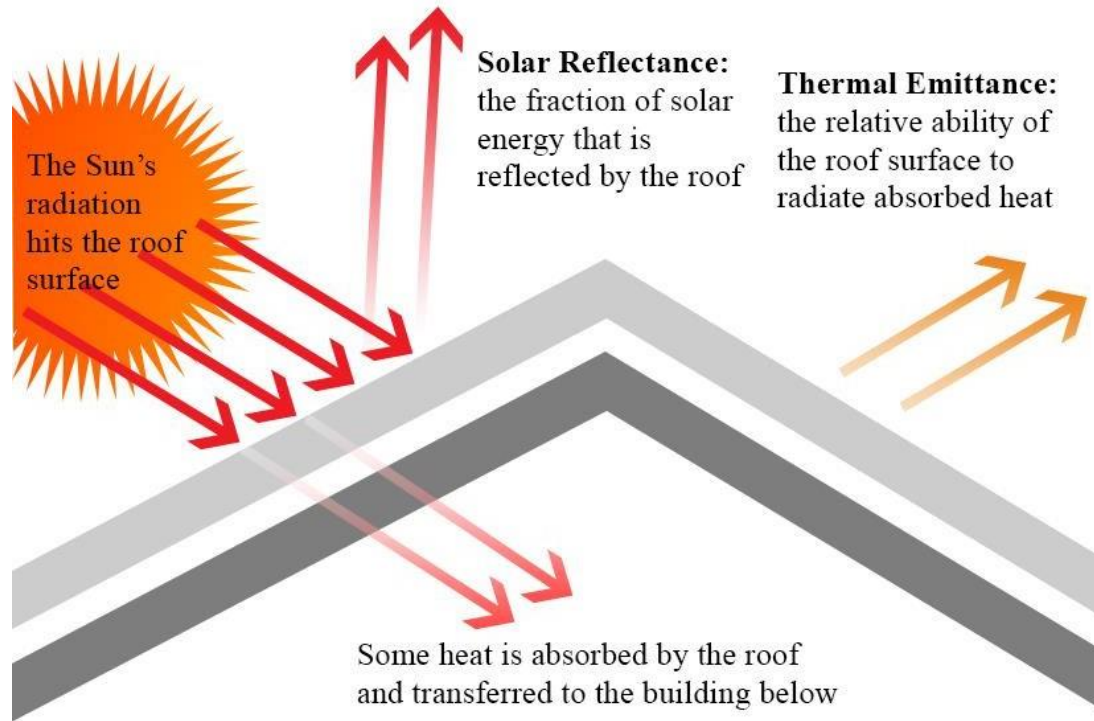


- Reflectance
- Thermal Emittance.
- Emissivity
- Solar Reflectance Index (SRI)


Source: ASC Building Products. (2020). Energy-Efficient Cool Colors in Today's Metal Roofing. ASC Building Products. Retrieved from <https://www.ascbp.com/cool-colors-and-energy-savings/>.

Glazing Material and Glazing Assemblies

Roof Coating Material and Solar Reflectance Index

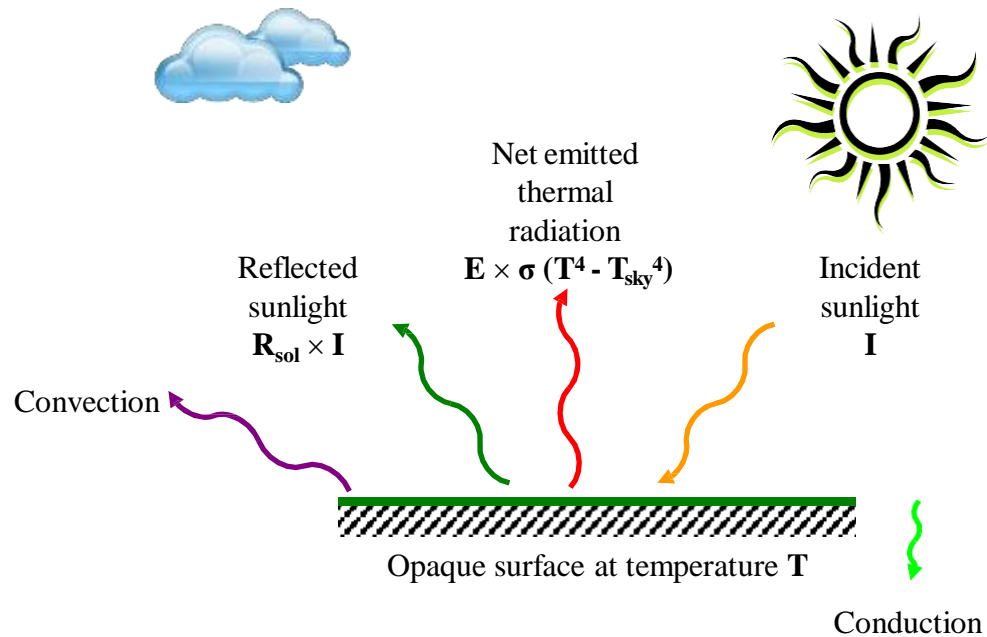

- High solar reflectance (R_{sol}) lowers solar heat gain (0.3 - 2.5 μm)
- High thermal emittance (E) enhances thermal radiative cooling (4 - 80 μm)

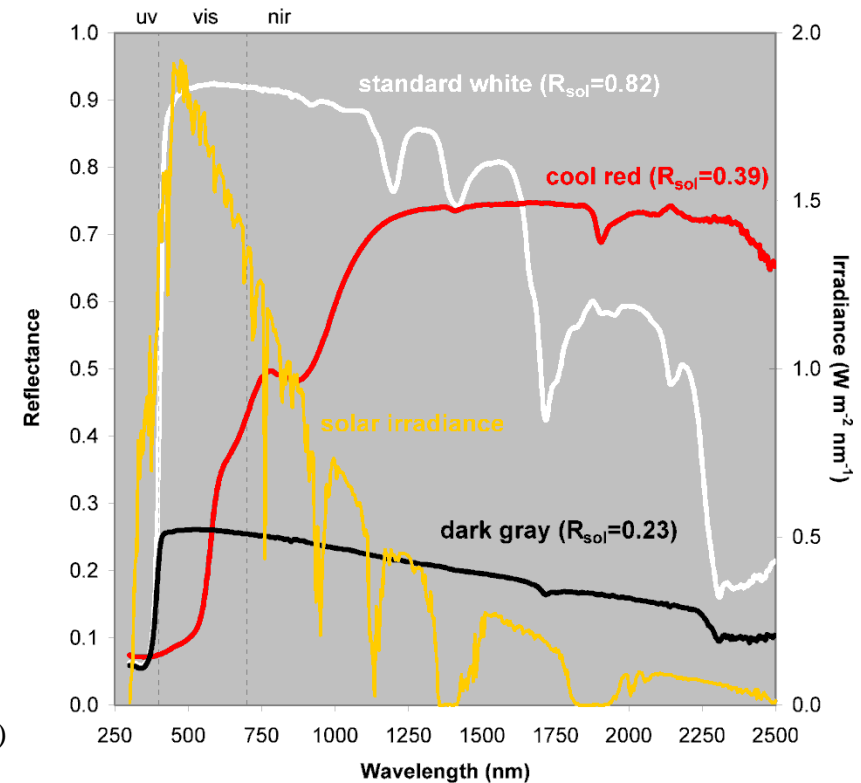

Glazing Material and Glazing Assemblies


Roof Coating Materials



Paints





Coated Sheets

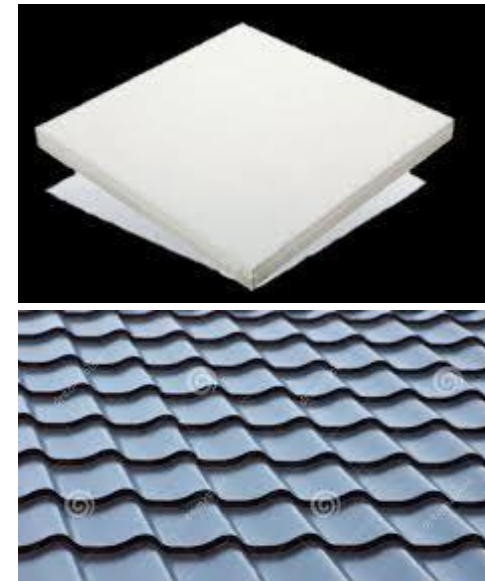

Tiles

Glazing Material and Glazing Assemblies

Roof Coating Materials

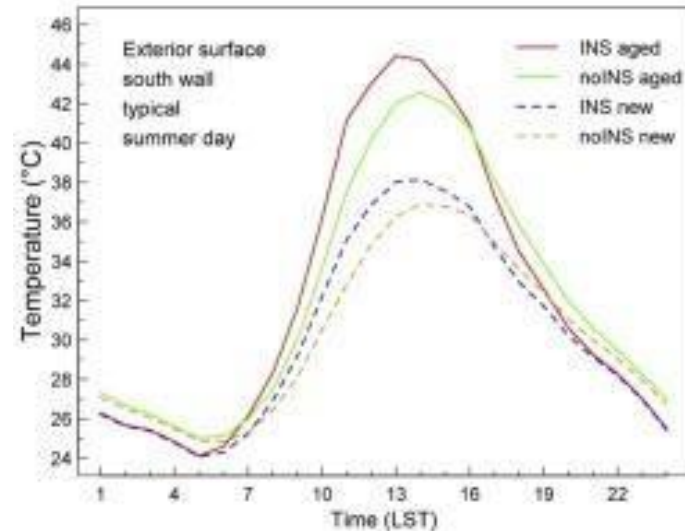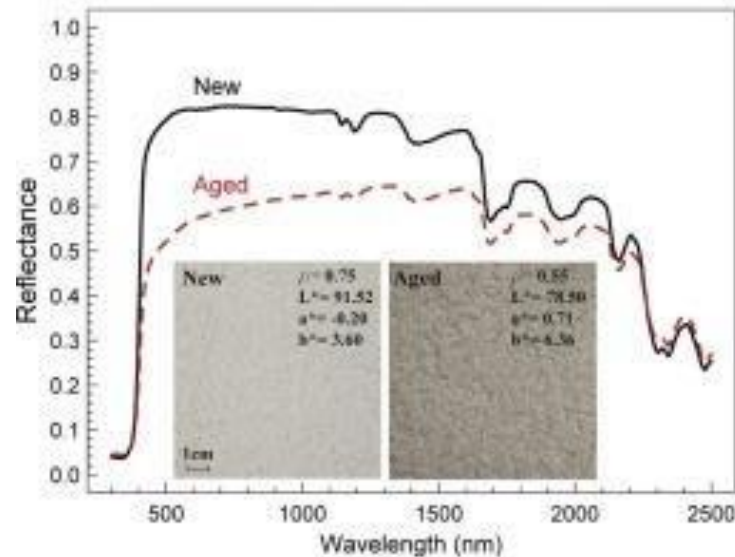


- PM 10, PM 2.5
- Dust, Sooth
- Vegetation

Source: Paolini, R., Zani, A., Poli, T., Antretter, F., & Zinzi, M. (2017). Natural aging of cool walls: Impact on solar reflectance, sensitivity to thermal shocks and building energy needs. *Energy and Buildings*, 153, 287–296. <https://doi.org/10.1016/j.enbuild.2017.08.017>

WALLING MATERIAL CASE STUDIES, Light House Projects

Walling Material Case Studies, Light House Projects



Light House Project: Agartala

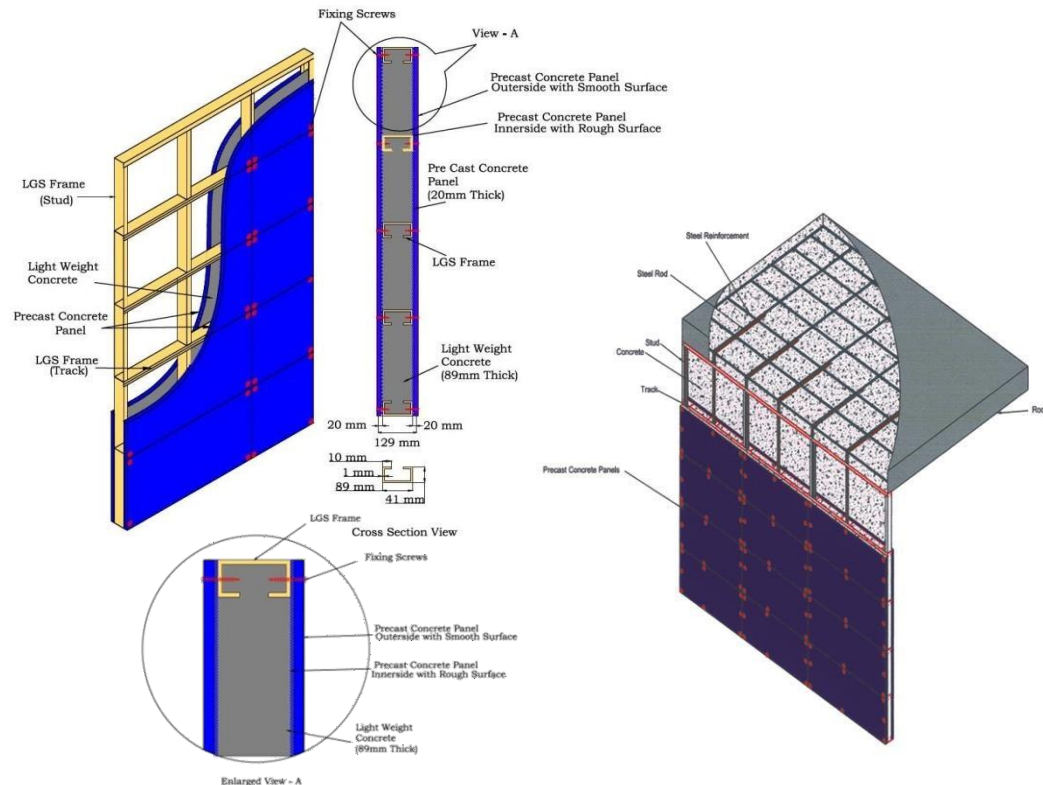

- Light Gauge Steel Framed Structure with Infill Concrete Panels (LGSFS-ICP)
- Ground and 06 Floors
- Weight of the LGSFS-ICP building is about 20-30% lighter
- The LSG frames are manufactured using numerically controlled roll forming machine using CAD design

Walling Material Case Studies, Light House Projects


Light House Project: Chennai

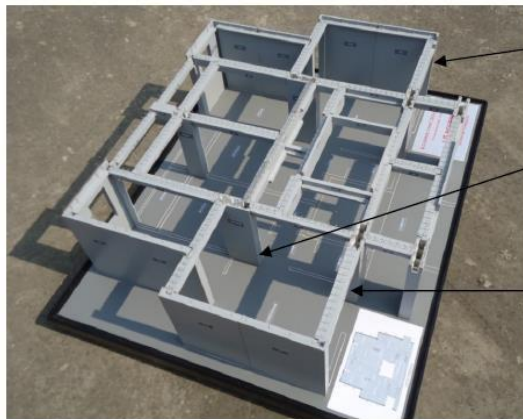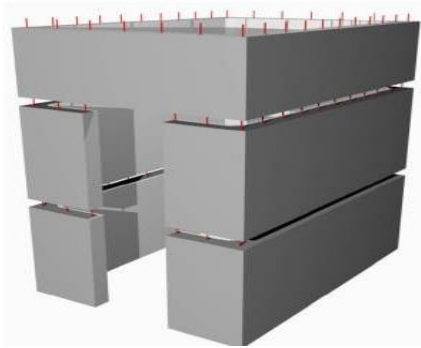

- Precast Concrete Construction System and Precast component Assembly at the site
- G and 05 Floors
- Precast dense reinforced cement concrete hollow core columns, structural RCC shear walls, T/L/Rectangular shaped beams, stairs, floor/roof solid....
- AAC blocks are used for partition walls

Walling Material Case Studies, Light House Projects

Light House Project: Indore

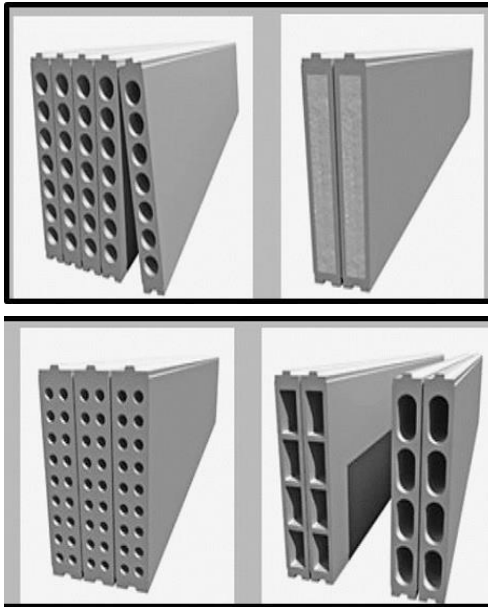

- Prefabricated Sandwich Panel System
- S and 08 Floors
- Lightweight composite wall, floor, and roof sandwich panels made of thin fiber cement/calcium silicate board
- Face covered boards and the core material is EPS granule balls

Walling Material Case Studies, Light House Projects

Light House Project: Lucknow



- PVC Stay in Place Formwork System
- S and 13 Floors
- Rigid polyvinyl chloride (PVC) based formwork system serves as a permanent stay-in-place durable finished form-work for concrete walls
- The PVC extrusions consist of the substrate (inner) and Modifier (outer). The two layers are co-extruded during the manufacturing process to create a solid profile.

Walling Material Case Studies, Light House Projects

Light House Project: Rajkot



- Monolithic Concrete Construction using tunnel formwork
- S and 8 Floors
- Tunnel forms are room size formworks that allow walls and floors to be cast in a single pour

Walling Material Case Studies, Light House Projects

Light House Project: Ranchi



- Pre-Cast Concrete Construction System – 3D volumetric
- Ground and 8 Floors
- 90% pre-casted at the casting yard
- Use of Fly Ash Ground granulated blast furnace slag (GGBS), micro silica.
- Minimal shutter and scaffolding



14

Case Studies

INFOSYS – POCHARAM CAMPUS

LOCATION

HYDERABAD,
TELANGANA

COORDINATES

17° N, 78° E

OCCUPANCY TYPE

OFFICE

TPOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

HOT AND DRY

PROJECT AREA

27,870 m²



Given the high-standards in terms of building design achieved at the SDB1 in Hyderabad, it has now been showcased in the 'Best Practices Guide for High Performance Indian Office Buildings' by Lawrence Berkeley National Lab, a U.S. Department of Energy (DoE) National Laboratory.

- The Indian Green Building Council (IGBC) has given Infosys, a worldwide consulting and technology firm, the LEED (Leadership in Energy and Environmental Design) India 'Platinum' designation for its Software Development Block 1 (SDB 1) at its Pocharam site in Hyderabad, India.
- The SDB 1 is the first commercial building in India to deploy unique Radiant-cooling technology, setting new norms for energy efficiency in building systems design.

It has been built keeping in mind a holistic approach to sustainability in five key areas

SUSTAINABLE SITE
DEVELOPMENT

WATER
SAVINGS

ENERGY
EFFICIENCY

MATERIALS
SELECTION

INDOOR
ENVIRONMEN
T QUALITY

EPI –
75kWh/m²/yr

GODREJ PLANT 13 ANNEXE

LOCATION

MUMBAI, MAHARASHTRA

COORDINATES

19° N, 73° E

OCCUPANCY TYPE

OFFICE – PRIVATE

TPOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

WARM AND HUMID

PROJECT AREA

24,443 m²



GODREJ PLANT 13 ANNEXE

The Plant 13 Annexe Building at Godrej & Boyce (G&B) in Mumbai has been designated as India's first CII-IGBC accredited Net Zero Energy Building. The structure is a mixed-use office/convention center (with office spaces, conference and meeting rooms, auditoriums (90 to 250 seats), banquet hall, 300-person eating facilities, and an industrial kitchen), making certification extremely difficult.

In 2015, the building received an IGBC Platinum grade in the EB (Existing Building) category, which was recertified in 2019. In 2016, it was also awarded the BEE 5 Star Rating. In 2019, he received the 'Energy Performance Award' for meticulous energy measuring and monitoring. At the CII National Energy Management Award event in 2020, it was named "Excellent Energy Efficient Unit."

**EPI –
75kWh/m²/yr**

INDIRA PARYAVARAN BHAWAN, MoEF

LOCATION

NEW DELHI

COORDINATES

29° N, 77° E

OCCUPANCY TYPE

OFFICE & EDUCATIONAL

TYPOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

COMPOSITE

PROJECT AREA

9565 m²



The Indira Paryavaran Bhawan is now India's most environmentally friendly structure. GRIHA 5 Star and LEED Platinum certifications were awarded to the project. The structure has already received accolades, including the MNRE's Adarsh/GRIHA Award for Outstanding Integration of Renewable Energy Technologies.

The new office building for the Ministry of Environment and Forest (MoEF), Indira Paryavaran Bhawan, is a significant departure from traditional architectural design

To reach net zero criterion, several energy saving measures were implemented to lower the building's energy loads, with the residual demand being satisfied by producing energy from on-site installed high efficiency solar panels.

The project team focused on measures for lowering energy demand, such as ample natural light, shade, landscape to reduce ambient temperature, and energy-efficient active building technologies

When compared to a conventional building, Indira Paryavaran Bhawan utilizes 70% less energy. The project used green building principles, such as water conservation and optimization through site waste water recycling.

**EPI –
44kWh/m²/yr**

Renewable Energy Integration 930 kW PV panels with a total area of 4650m² for on- site generation, tilted at 23° facing south to generate equivalent to 70kWh/m²/yr

JAQUAR HEADQUARTERS

LOCATION

MANESAR HARYANA

COORDINATES

28° N, 77° E

OCCUPANCY TYPE

CORPORATE AND
MANUFACTURING

TPOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

COMPOSITE

PROJECT AREA

48000 m²



JAQUAR HEADQUARTERS

The building is a perfect blend of modern design sensibilities, biophilic inspiration, and a brand ambition of soaring high.

The Jaguar Headquarters in Manesar is not only a stunning structure, but also a painstakingly constructed complex with cutting-edge technology that has resulted in a net zero campus with a LEED Platinum (USGBC) rating. This project is known for its complex organic design and space arrangement, making it a visual pleasure.

Through its characteristic wing-shaped architecture, the design redefines a business workplace by giving it a memorable experience. The spreading wings of a symbolic eagle, poised to take flight, are atop the horizontal glass edifice, suggesting a firm with worldwide ambitions.

ST. ANDREWS BOYS HOSTEL BLOCK, GURUGRAM

LOCATION

GURUGRAM HARYANA

COORDINATES

28° N, 76° E

OCCUPANCY TYPE

HOSTEL

TPOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

HOT AND DRY

PROJECT AREA

5574 m²



ST. ANDREWS BOYS HOSTEL BLOCK, GURUGRAM

The goal of the design process was to increase student interaction within the indoor areas, which then spilled outdoors and interacted with the surrounding landscape.

On the south and north facades, the linear block was twisted to create a shaded entry (summer court) and an open terrace (winter court), respectively, to stimulate activities at all times of the day and season. The ramp serves as a buffer between the hot outdoors and the cooler interior, preventing kids from experiencing heat shock.

ST. ANDREWS GIRLS HOSTEL BLOCK, GURUGRAM

LOCATION

GURUGRAM HARYANA

COORDINATES

28° N, 76° E

OCCUPANCY TYPE

HOSTEL

TPOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

HOT AND DRY

PROJECT AREA

2322 m²



ST. ANDREWS GIRLS HOSTEL BLOCK, GURUGRAM

Indoor and outdoor spaces that connect physically and aesthetically at different levels to encourage interactions and social activities are incorporated into the building's plan.

The entrance foyer and lobby were planned as outdoor spaces facing west and connected to the pantry so that students can enjoy their nights outside with a spill-out into the green landscape.

AKSHAY URJA BHAWAN HAREDA

LOCATION

PANCHKULA HARYANA

COORDINATES

30° N, 76° E

OCCUPANCY TYPE

OFFICE - PUBLIC

TPOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

COMPOSITE

PROJECT AREA

5100 m²



AKSHAY URJA BHAWAN HAREDA

Mechanical air conditioning is used to guarantee thermal comfort in apical zones at all times.

Zones are created based on the intended temperature set points. 25.1 °C for apex offices, 25.3 °C for regulated office and public areas, and 25.5 °C for passive zones.

In the summer, controlled zones are cooled, and in the monsoon, they are chilled. In the summer, passive zones are cooled, while in the monsoon, they are aired. The centre atrium has a mist system for cooling the controlled and passive zones. Water that has been chilled to a temperature of 15°C.

SUN CARRIER OMEGA

LOCATION

BHOPAL M.P.

COORDINATES

23° N, 77° E

OCCUPANCY TYPE

OFFICE – PRIVATE

TPOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

HOT AND DRY

PROJECT AREA

9888 ft²



GRIDCO BHUBANESWAR

LOCATION

BHUBANESWAR.

COORDINATES

20° N, 85° E

OCCUPANCY TYPE

OFFICE

TYOLOGY

NEW CONSTRUCTION

CLIMATE TYPE

WARM AND HUMID

PROJECT AREA

15,793.5 m²



GRIDCO BHUBANESWAR

The structure was created using computer simulation to determine how long direct sunshine or radiation was tolerable for human habitat based on the sun-path of Bhubaneswar.

The structure encourages natural light and screen radiation. It would feature photovoltaic glass panels and geothermal cooling systems strategically placed, as well as indigenous solar producing technologies, to ensure that it is self-sustaining.

Rainwater can be collected, purified, and utilised as drinkable water. Grey water that has been treated can be reused for flushing and landscape irrigation.

Tea Break

Vote of Thanks



THANK YOU